AFA Systems

HD-CMS

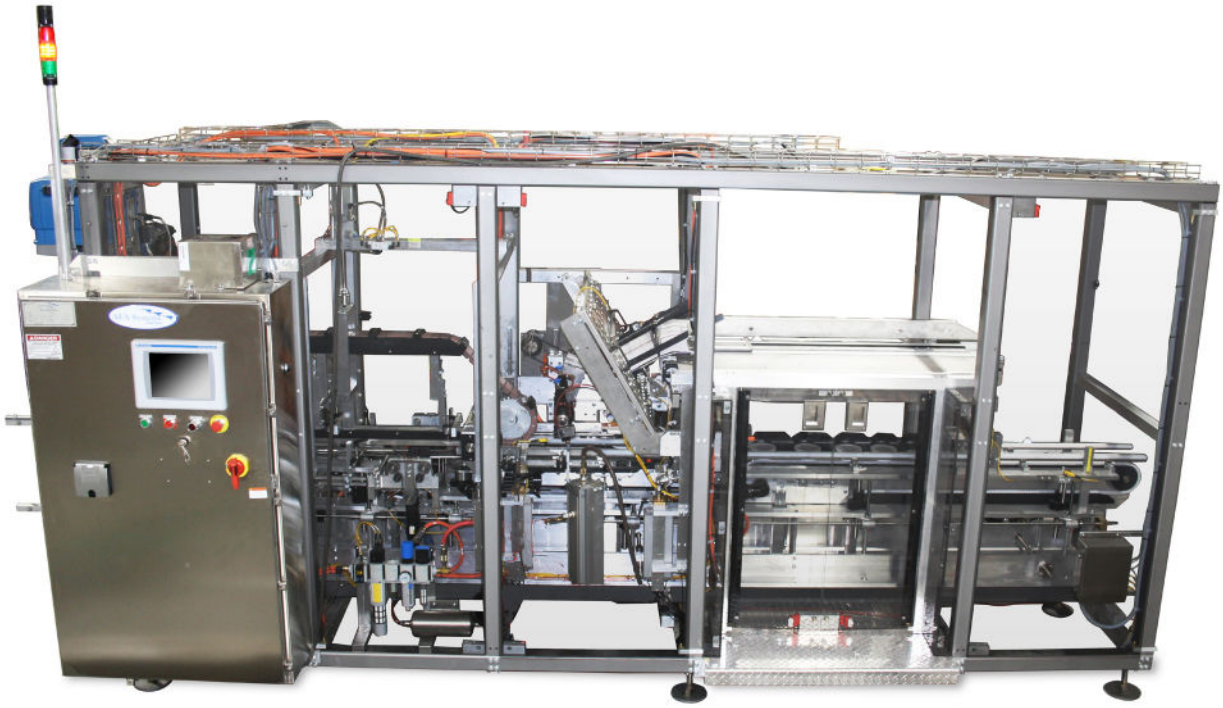

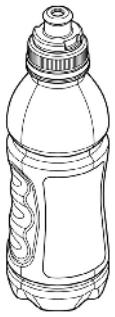



HD-CMS - Continuous Motion Autoload Sleever

MACHINE FEATURES

- High-speed sleeving speeds of up to 300 sleeves per minute (spm).
- Either pre-glued or flat-blank sleeving capability.
- Push button change over to complete size change overs in minutes.
- Timing screw infeed system to handle bottles, cups, tubs, and more at high-input rates.

TECHNICAL SPECIFICATIONS

- Innovative closing system to handle wrap-around sleeves.
- Rotary sleeve feeder that is servo-driven.
- Full category 3 guarding with safety interlocked Lexan doors.
- Modular design can allow for future retrofits.

PMMI

FANUC

Rockwell Automation Equipment Builder Partner

AFA Systems Ltd.
8 Tilbury Ct, Brampton,
Ontario, Canada
(905) 456-8700
info@afasystemsinc.com

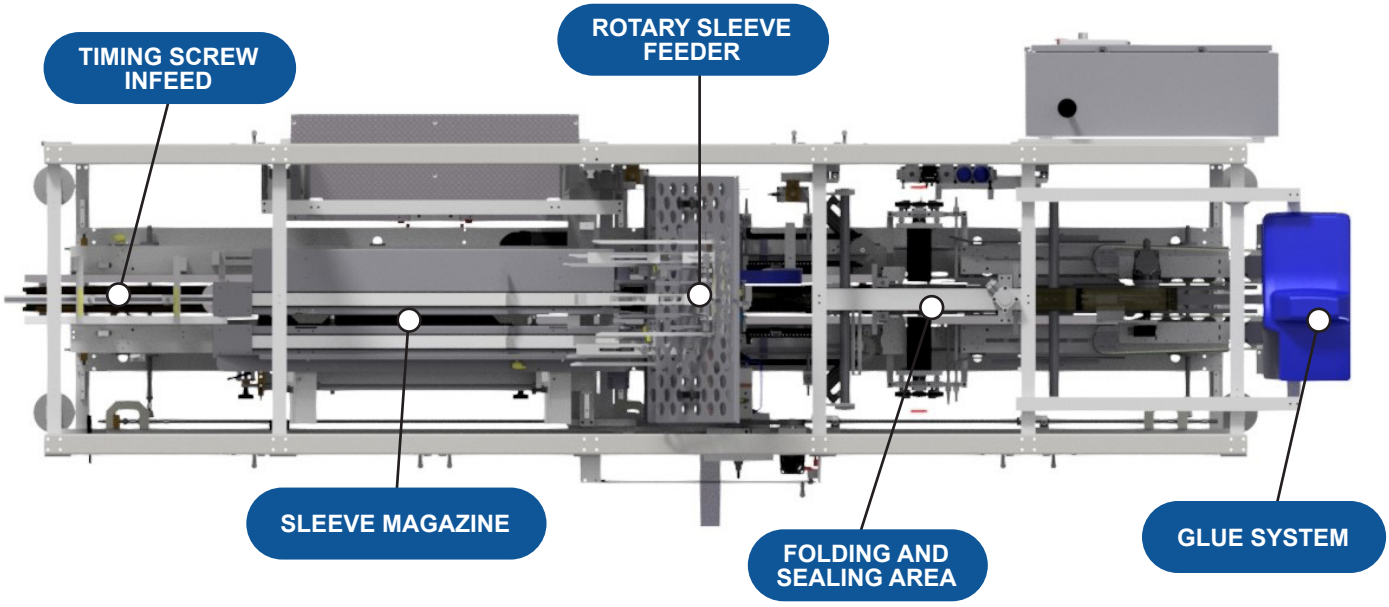

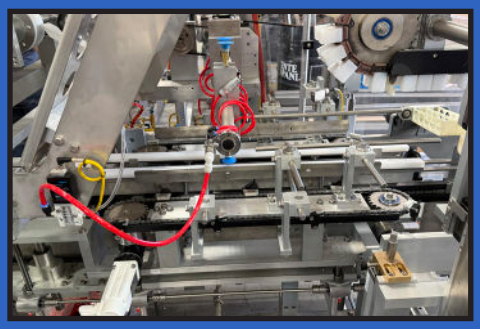

Stainless steel construction with food-grade servo motors allows the sleever to run in a wet environment. The electrical cabinet and junction boxes are also stainless steel for added protection.

Timing-screw infeed system to handle incoming product speeds of 300 ppm. The timing-screw is servo-driven and precisely pitches the product so sleeves can easily place onto the collated product.

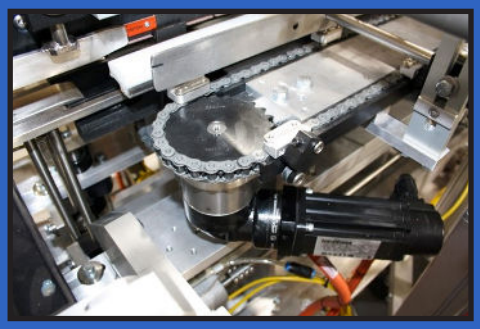

All major actuations on the HD-CMS sleever are servo-driven. This includes main sleeve carrier chain conveyor, rotary flap kickers, and sleeve squaring system. This provides optimal and efficienct operation.

SLEEVE SIZE RANGE

STANDARD *If size outside carton size range please check with AFA Representative	MIN	MAX
L	.5”	8”
W	.5”	10”
D	3”	12”



VIDEO