



(12) **United States Patent**
Langen et al.

(10) **Patent No.:** **US 10,850,881 B2**
(45) **Date of Patent:** **Dec. 1, 2020**

- (54) **METHOD AND APPARATUS FOR RECONFIGURING CONTAINERS**
- (71) Applicant: **AFA SYSTEMS LTD.**, Brampton (CA)
- (72) Inventors: **H. J. Paul Langen**, Brampton (CA); **Ryan Radu**, Mississauga (CA)
- (73) Assignee: **AFA SYSTEMS LTD.**, Ontario (CA)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 105 days.

B65H 3/085 (2013.01); *B65H 3/0883* (2013.01); *B65H 3/42* (2013.01); *B65H 5/10* (2013.01); *B31B 50/024* (2017.08); *B31B 50/046* (2017.08); *B31B 50/062* (2017.08); *B31B 2100/00* (2017.08); *B31B 2120/30* (2017.08); *B65H 2701/1766* (2013.01)

- (58) **Field of Classification Search**
USPC 414/795.4, 797.7, 797.8; 493/309
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 2,762,274 A * 9/1956 Kerr 493/181
- 2,887,022 A * 5/1959 Lubersky B31B 50/00
493/124

(Continued)

- (21) Appl. No.: **15/970,477**
- (22) Filed: **May 3, 2018**
- (65) **Prior Publication Data**
US 2018/0319525 A1 Nov. 8, 2018

Related U.S. Application Data

- (60) Provisional application No. 62/501,562, filed on May 4, 2017.

- (51) **Int. Cl.**
B65B 43/30 (2006.01)
B65H 5/10 (2006.01)
B31B 50/02 (2017.01)
B31B 50/80 (2017.01)
B65H 3/08 (2006.01)
B65H 3/42 (2006.01)
B65B 43/18 (2006.01)
B65B 43/14 (2006.01)
B31B 120/30 (2017.01)
B31B 100/00 (2017.01)


(Continued)

- (52) **U.S. Cl.**
CPC *B65B 43/305* (2013.01); *B31B 50/022* (2017.08); *B31B 50/804* (2017.08); *B65B 43/145* (2013.01); *B65B 43/185* (2013.01);

(57) **ABSTRACT**

Methods and apparatus for forming containers from container blanks are provided. An apparatus comprises a blank holding apparatus operable to releasably hold a plurality of carton blanks in a first configuration. The apparatus also has a rotary apparatus operable to rotate an engagement device along a rotational path from a first retrieval location where the engagement device is operable to engage with and retrieve a blank from the plurality of blanks held in the blank holding apparatus, to a second operational location. The apparatus also has a movement apparatus inter-connected to the rotary apparatus. The movement apparatus is operable to move the rotary apparatus and the engagement device with the engaged blank away from the blank holding apparatus, which may be translational movement away from the blank holding apparatus.

38 Claims, 16 Drawing Sheets

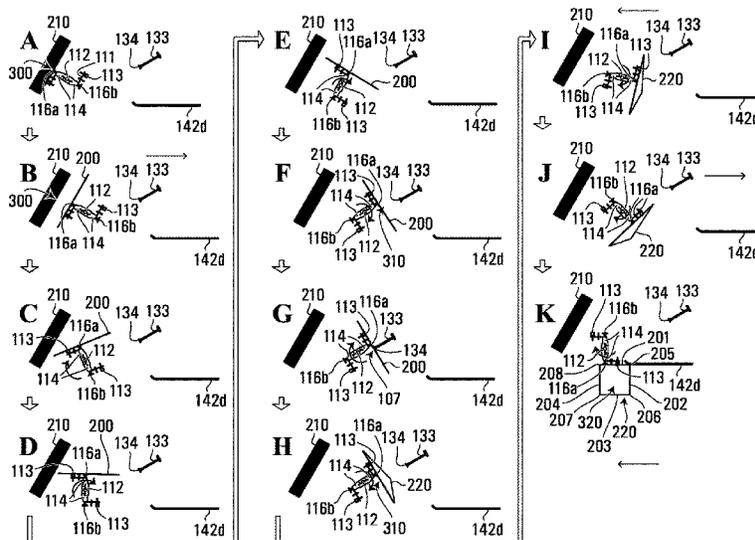

(51)	Int. Cl. <i>B31B 50/04</i> <i>B31B 50/06</i>	(2017.01) (2017.01)	5,473,868 A *	12/1995	Antonio	B65B 43/345 493/309
(56)	References Cited		5,910,078 A	6/1999	Guttinger et al.	493/315
	U.S. PATENT DOCUMENTS		6,240,707 B1 *	6/2001	Ford	B65B 43/305 493/315
	3,633,470 A *	1/1972	Bingham	6,474,635 B2 *	11/2002	Ruf
			B65B 43/185 493/310	6,699,165 B1 *	3/2004	Krieger
	3,937,458 A	2/1976	Langen	7,695,421 B2 *	4/2010	Ford
	4,531,931 A *	7/1985	Dietrich	8,277,367 B2 *	10/2012	Jannin
			B65B 43/185 493/309	9,821,526 B2 *	11/2017	Cavazza
	4,537,587 A	8/1985	Langen	2007/0072756 A1 *	3/2007	Monti
	4,629,446 A *	12/1986	Focke	2008/0300123 A1 *	12/2008	Bonnain
			B31B 50/00 271/91	2009/0264269 A1 *	10/2009	Monti
	4,735,600 A *	4/1988	Drewke	2013/0186043 A1 *	7/2013	Monti
			B65B 43/185 493/314	2013/0199135 A1 *	8/2013	Monti
	5,061,231 A *	10/1991	Dietrich	5,456,570 A *	10/1995	Davis, Jr.
			B65H 3/0883 493/315			B65G 47/915 271/107
	5,176,612 A *	1/1993	Calvert			
			B65B 43/185 271/95			
	5,298,008 A *	3/1994	Decker			
			B31B 50/80 493/313			

* cited by examiner

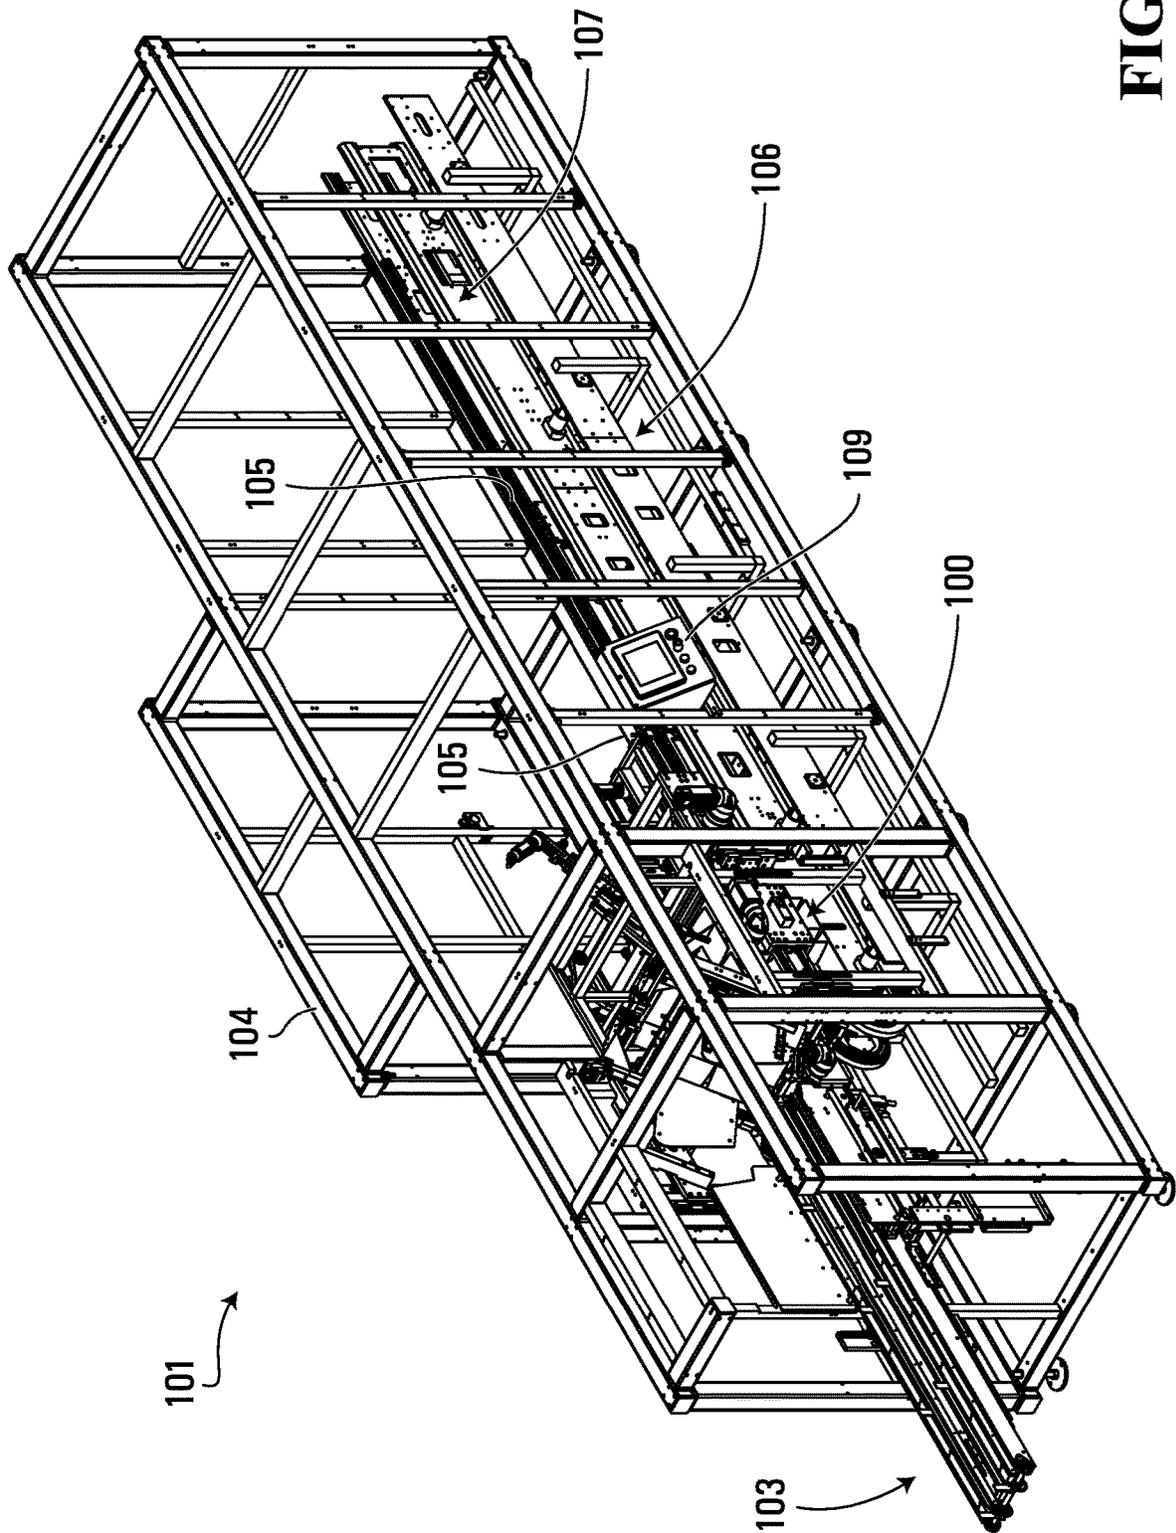


FIG. 1A

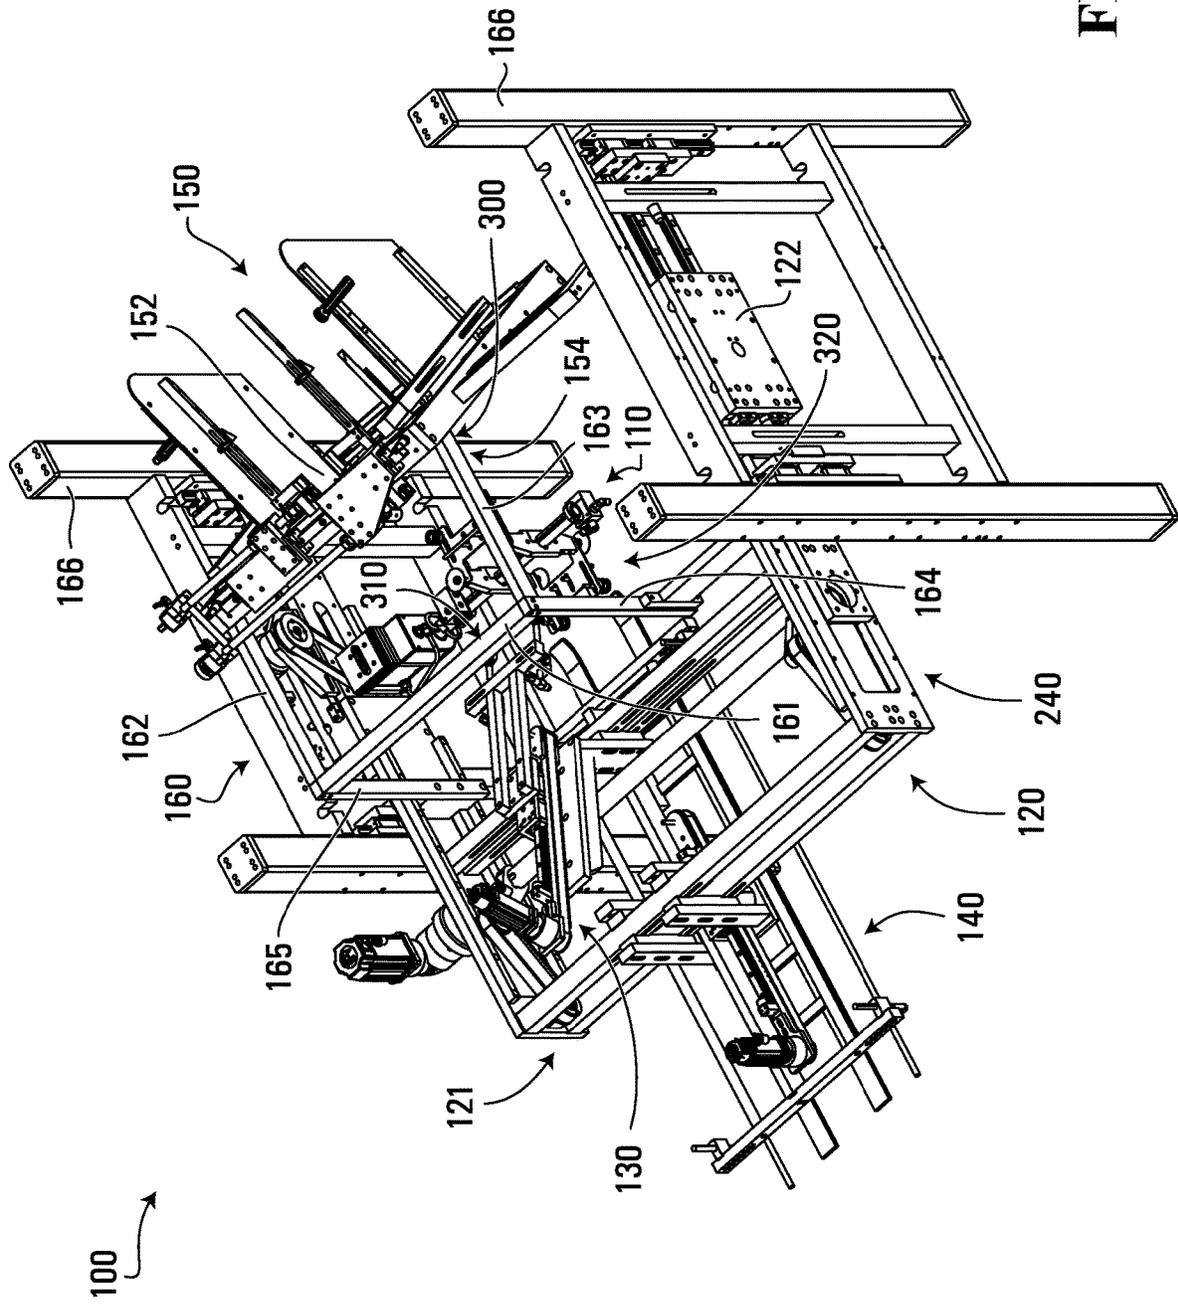


FIG. 1B

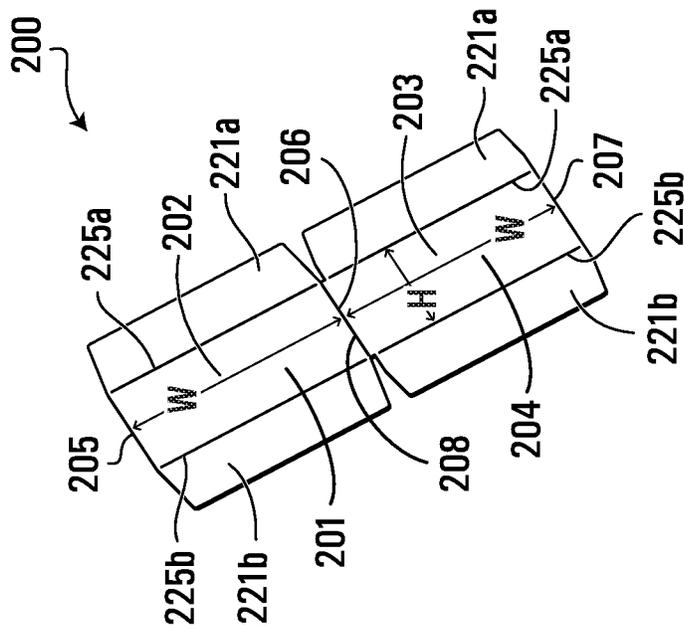


FIG. 1C

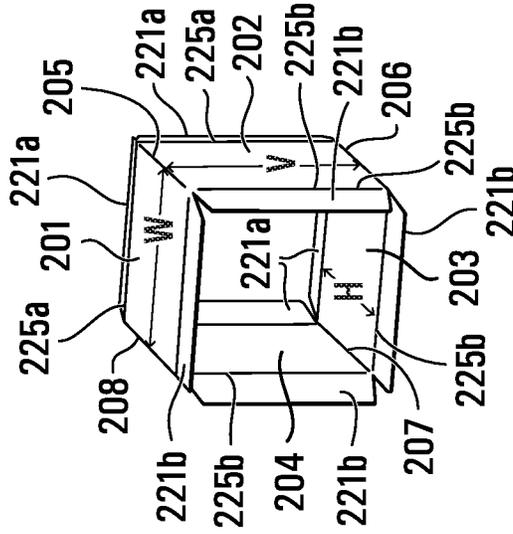


FIG. 1D

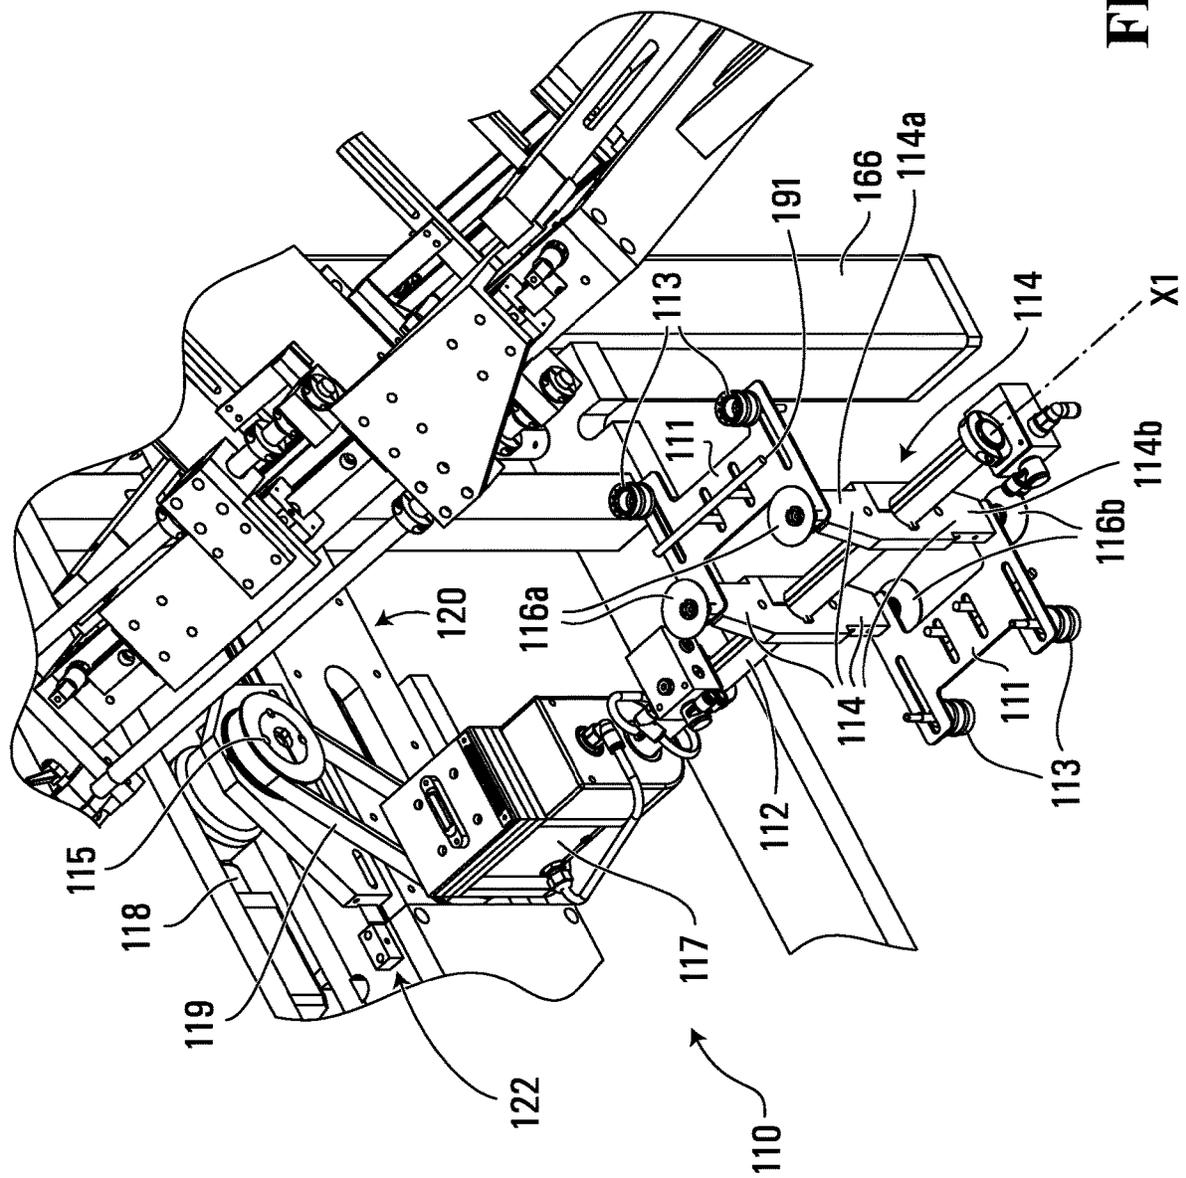


FIG. 2

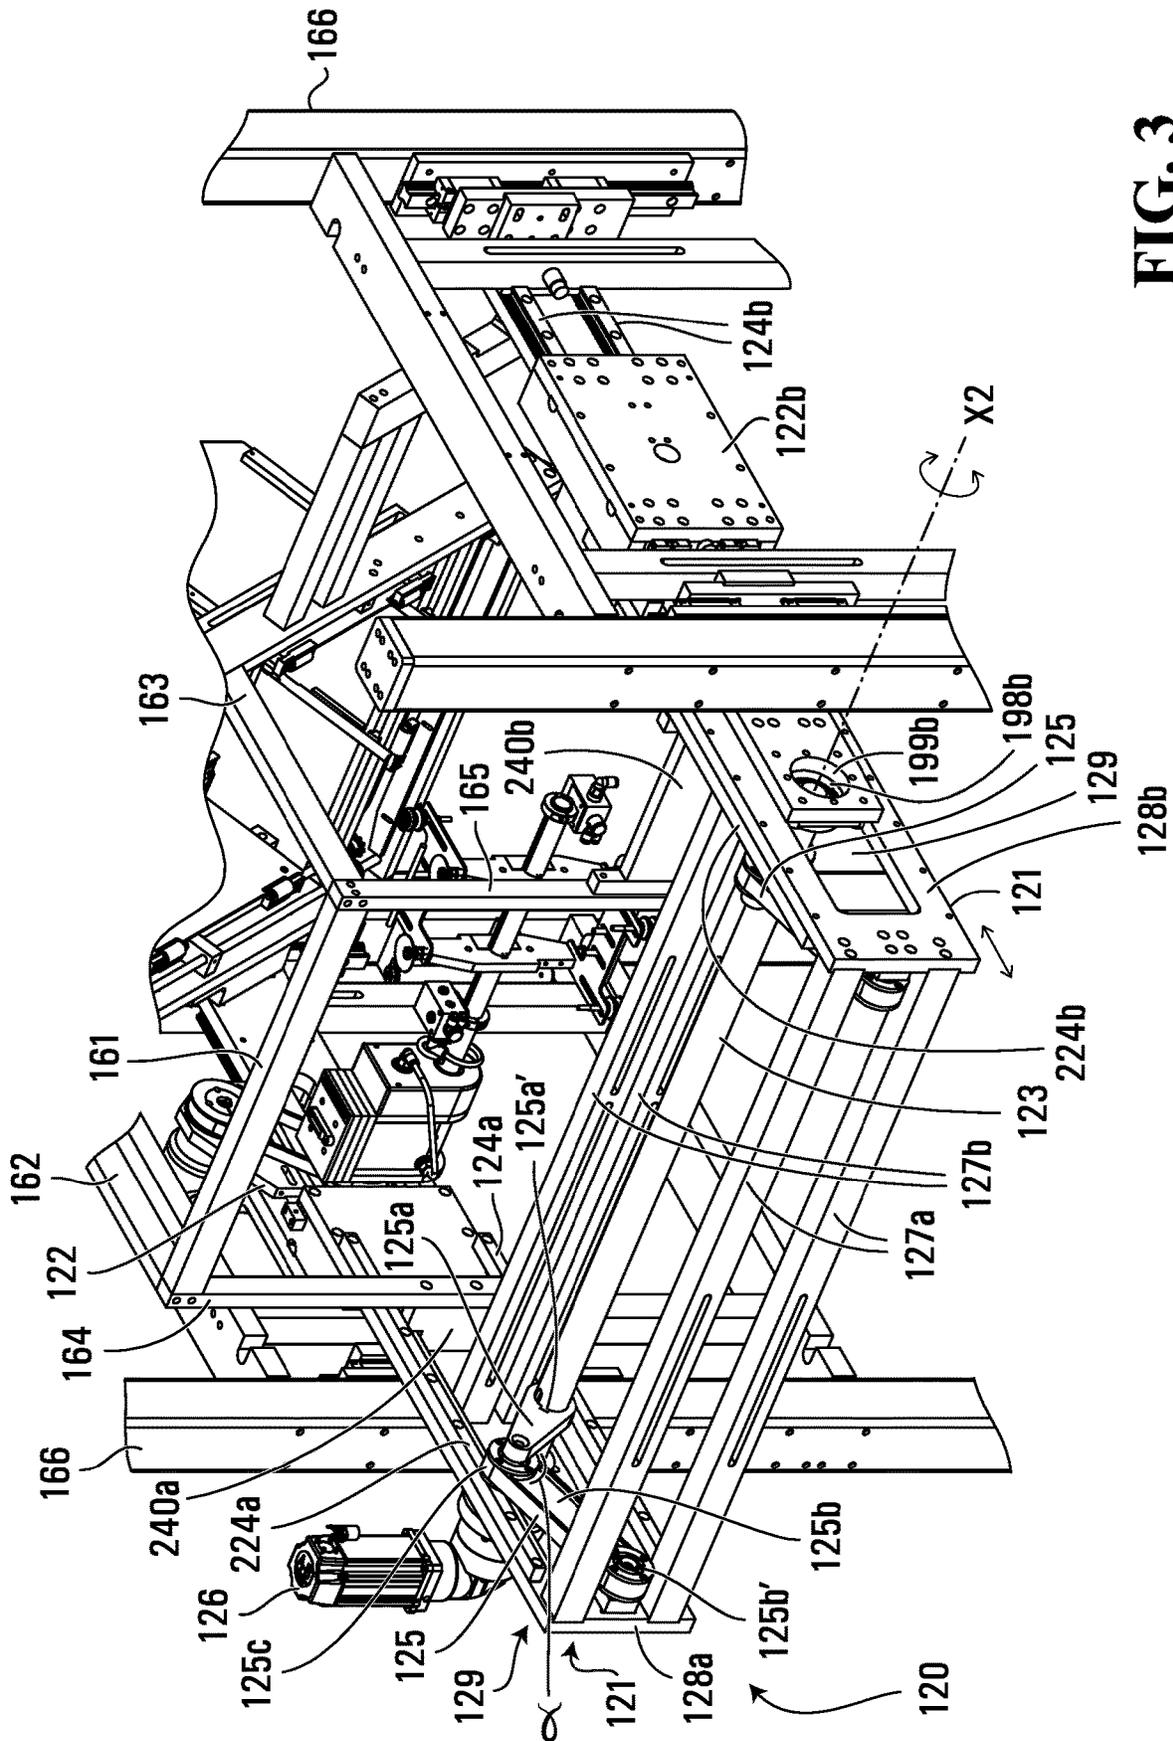


FIG. 3

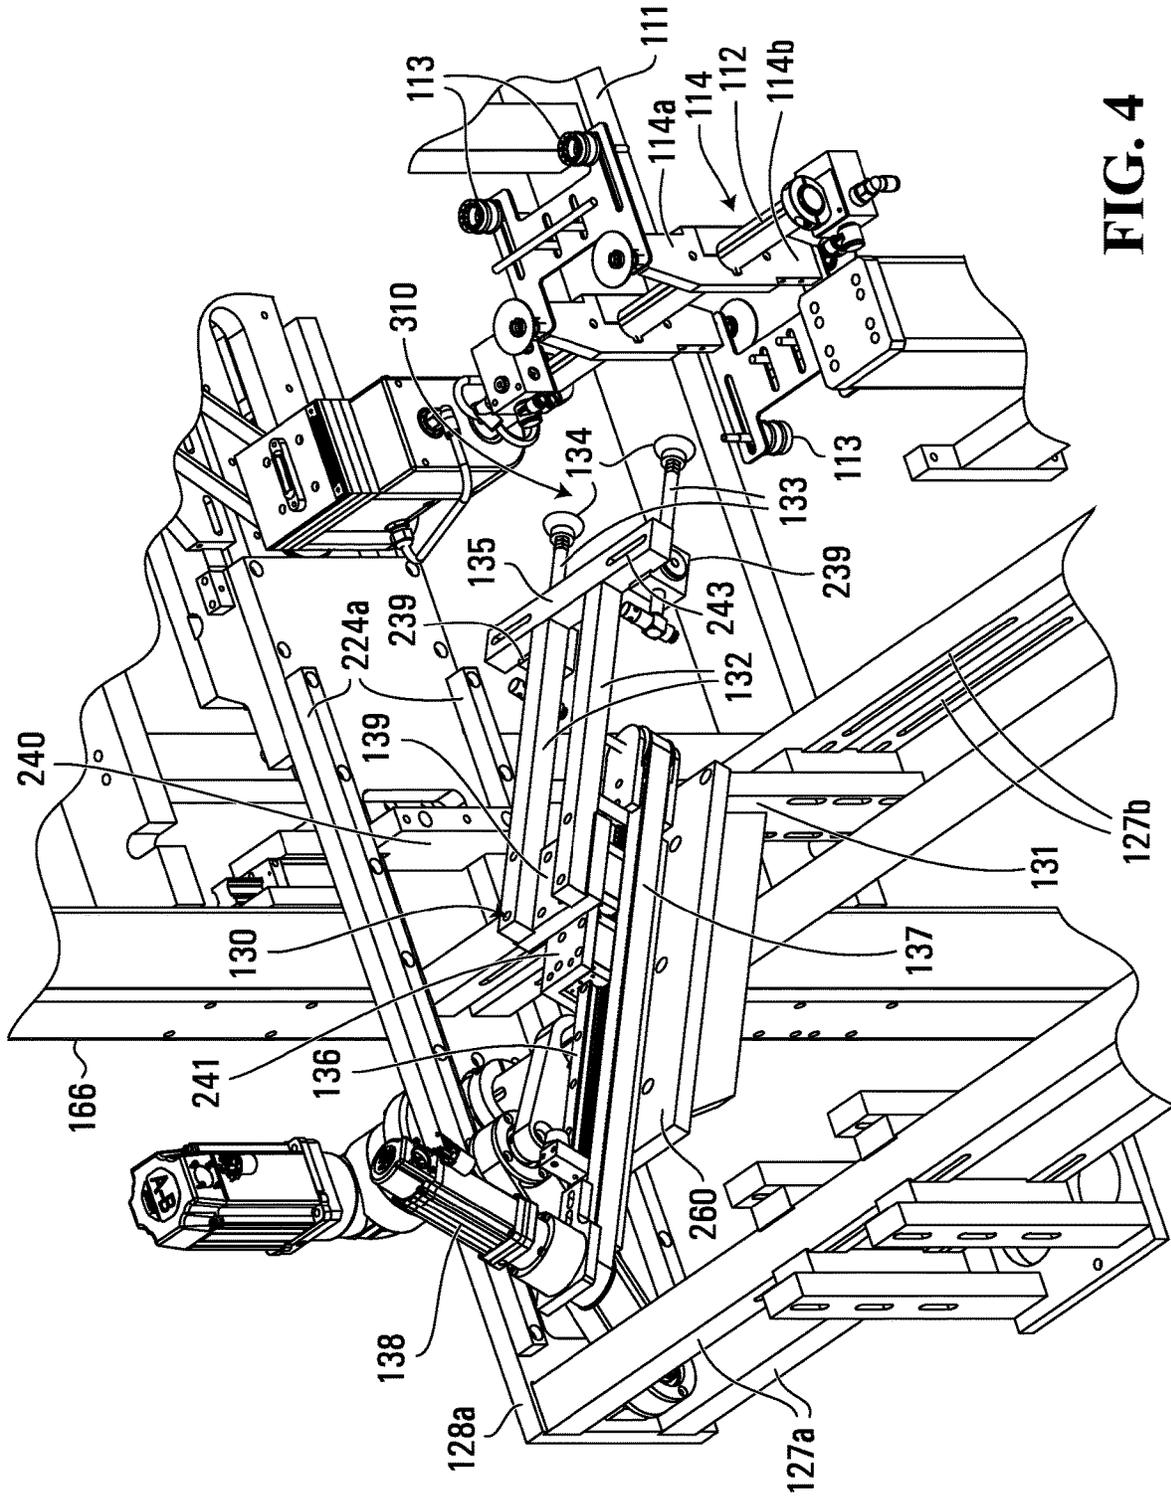


FIG. 4

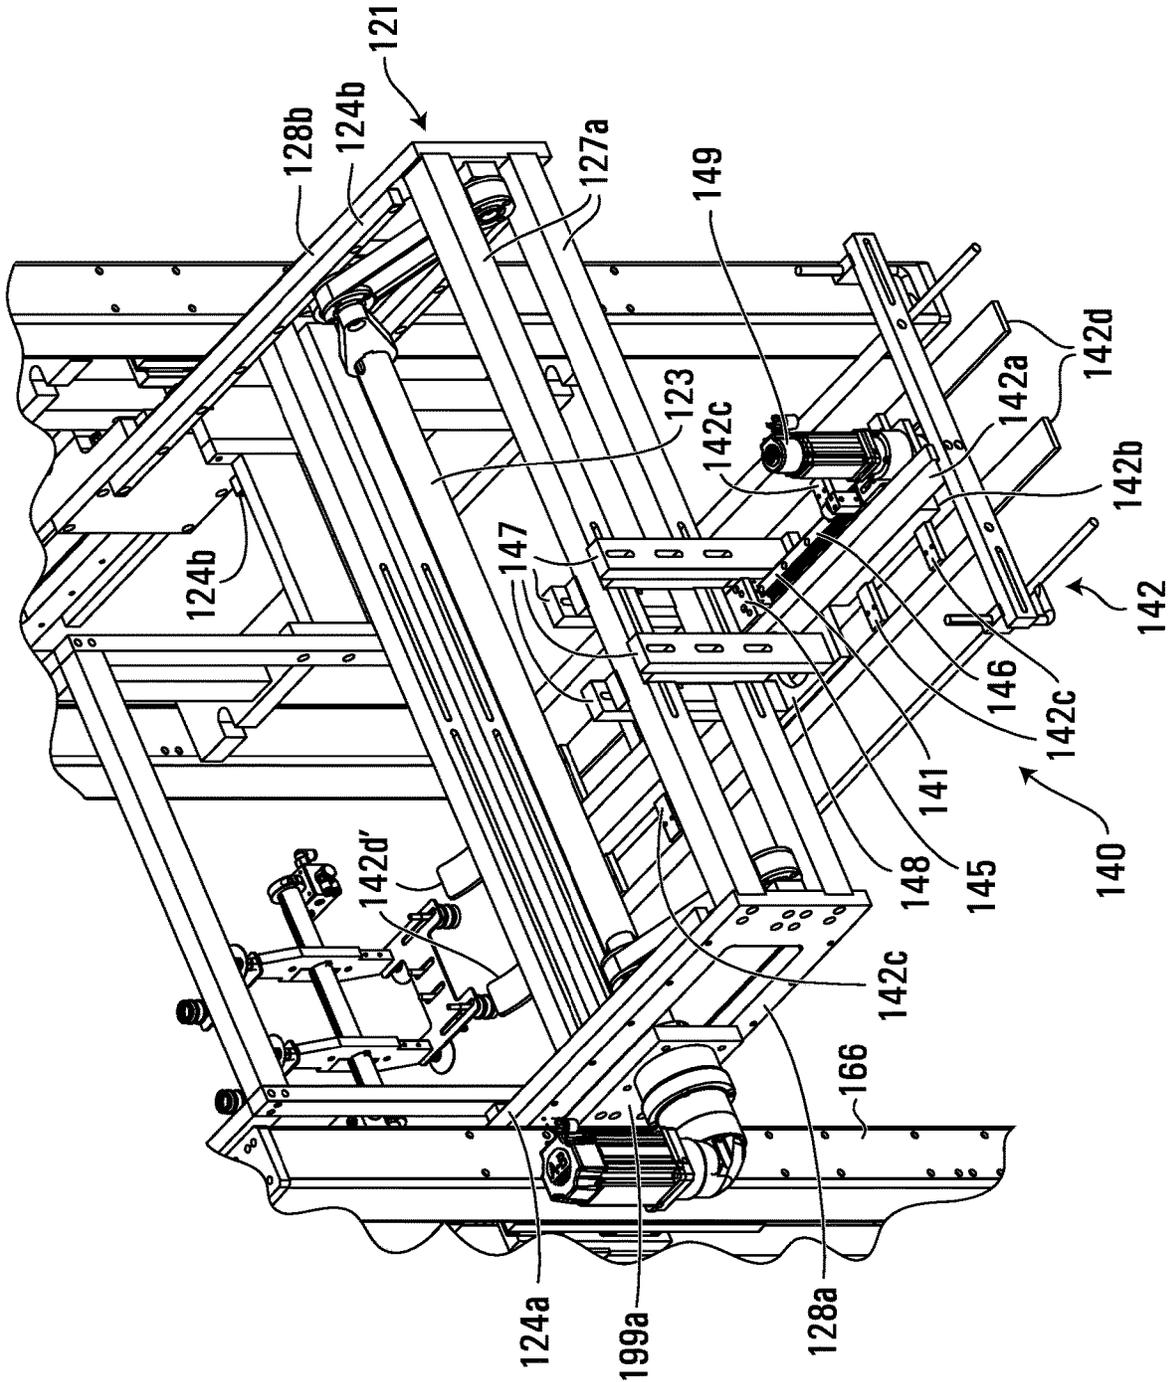


FIG. 5

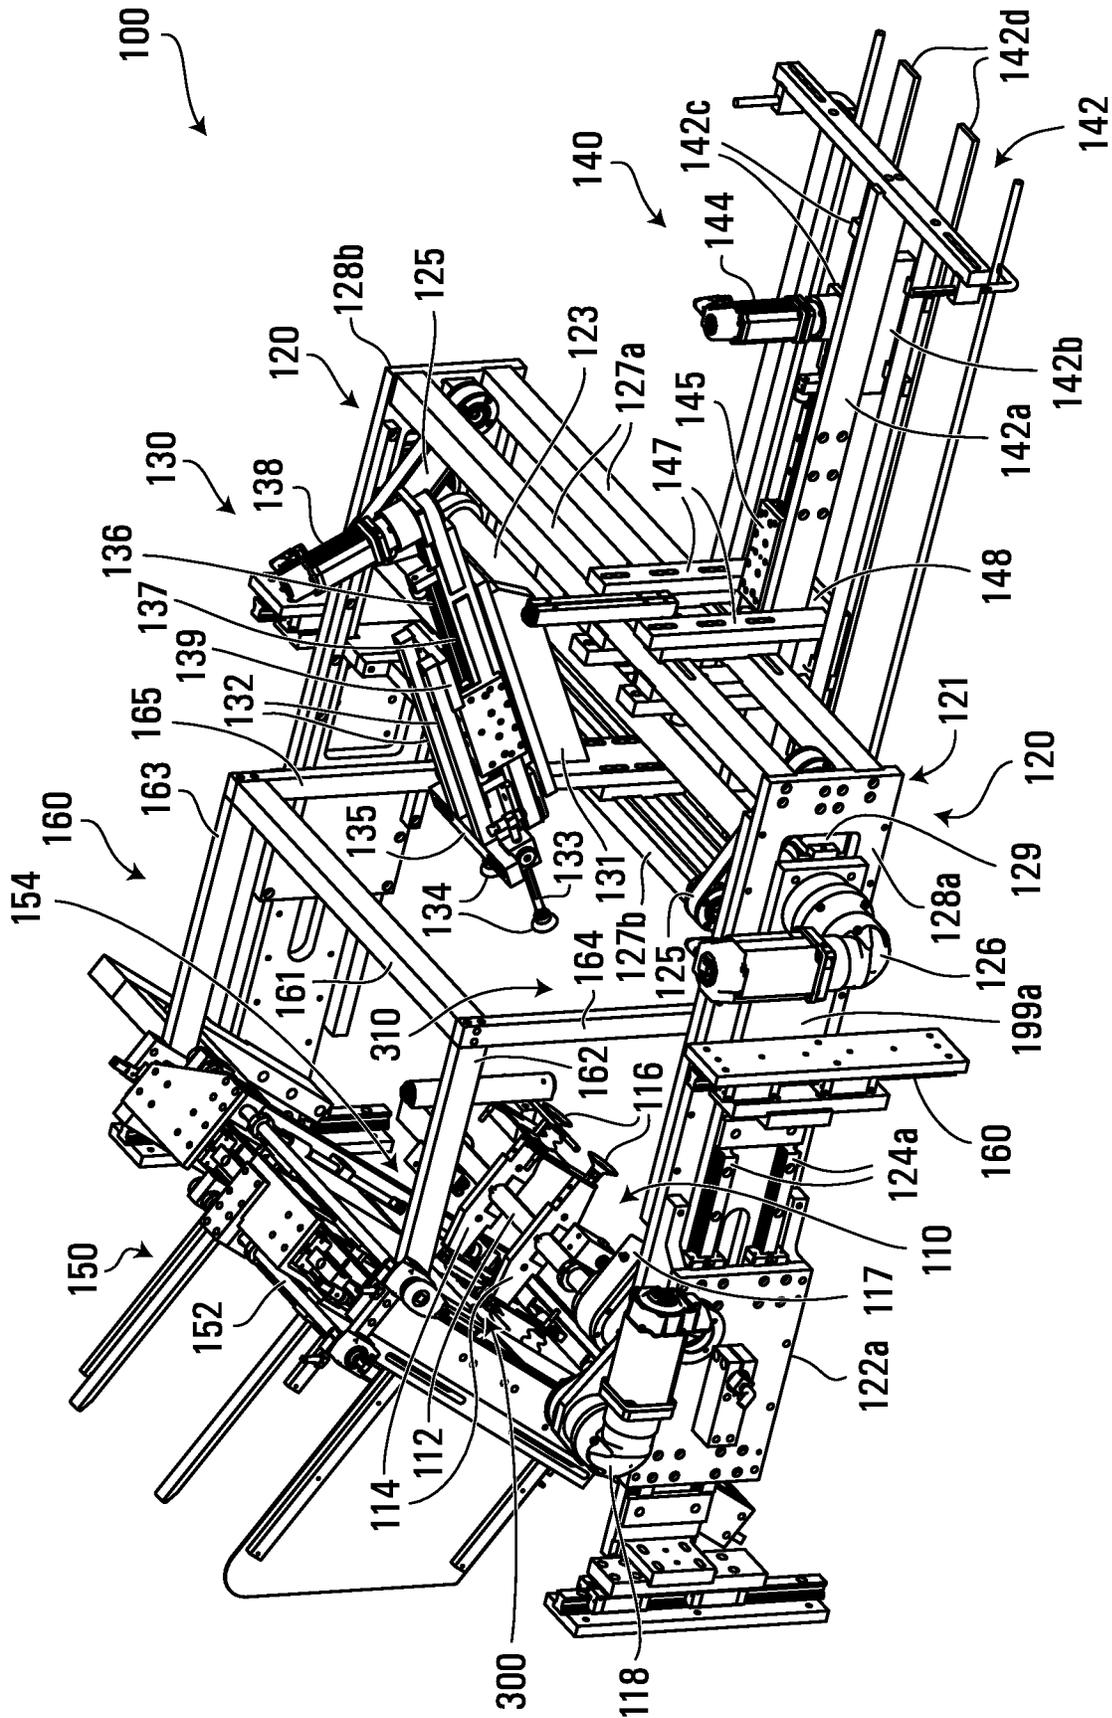


FIG. 6

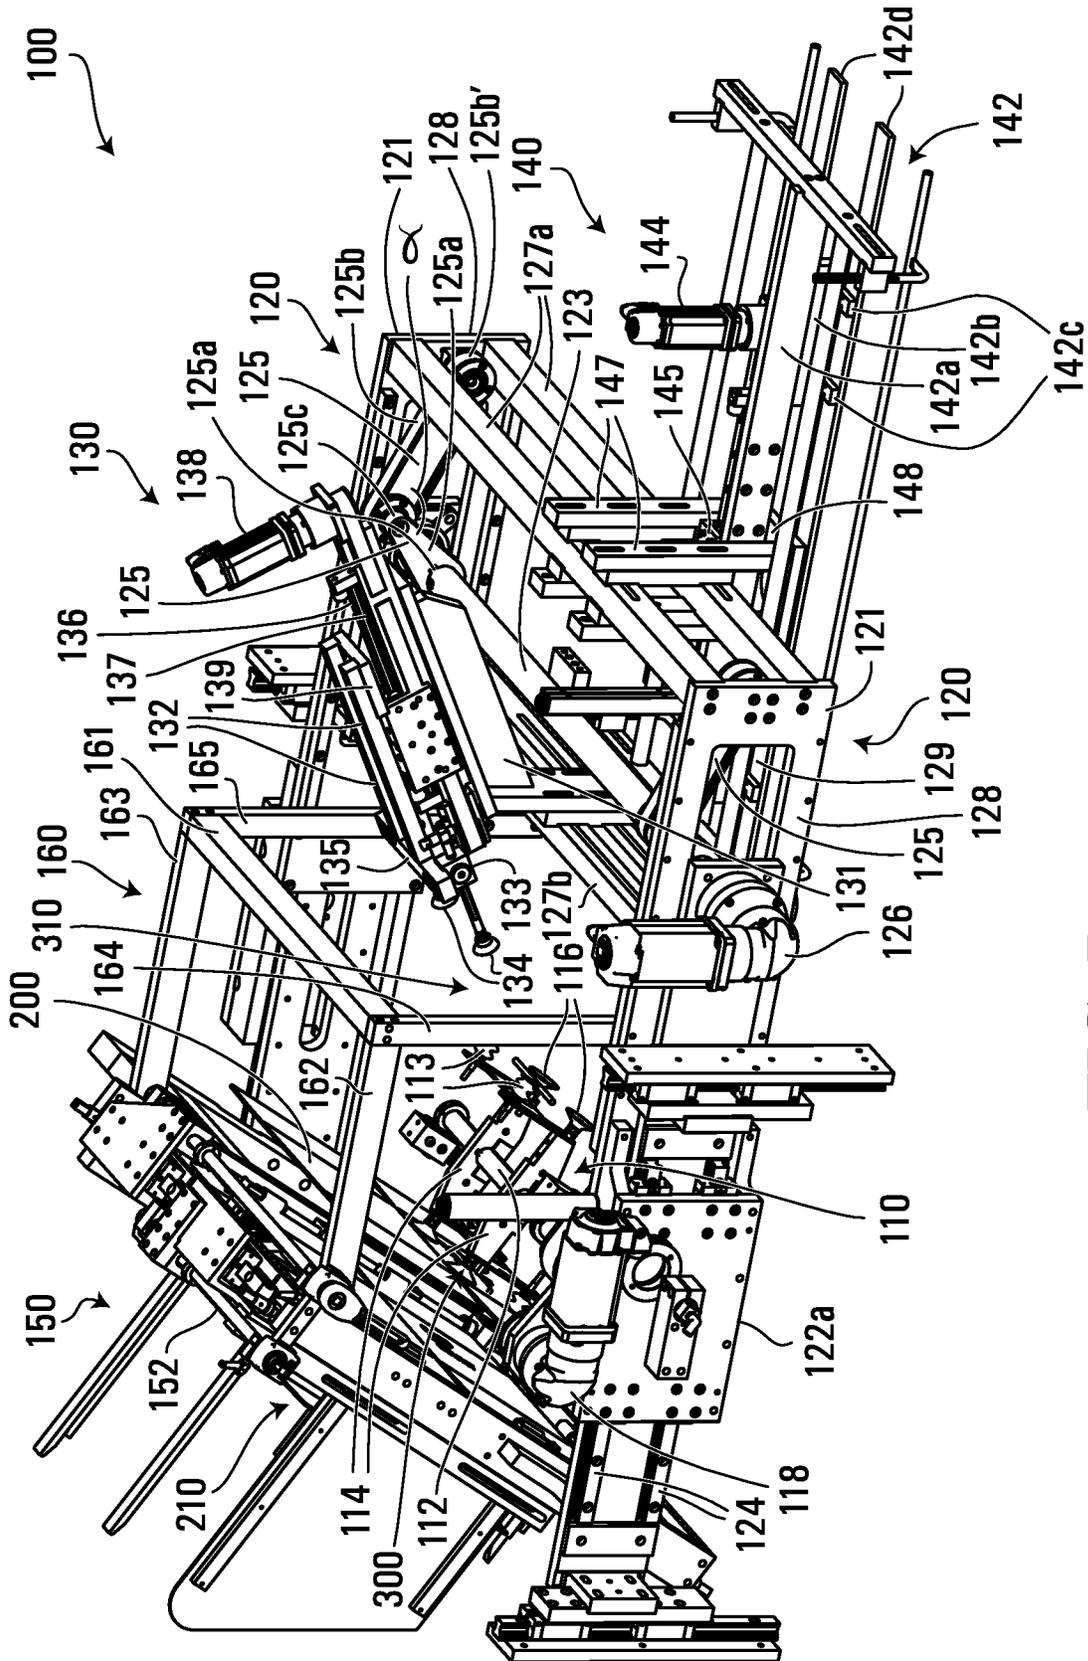


FIG. 7

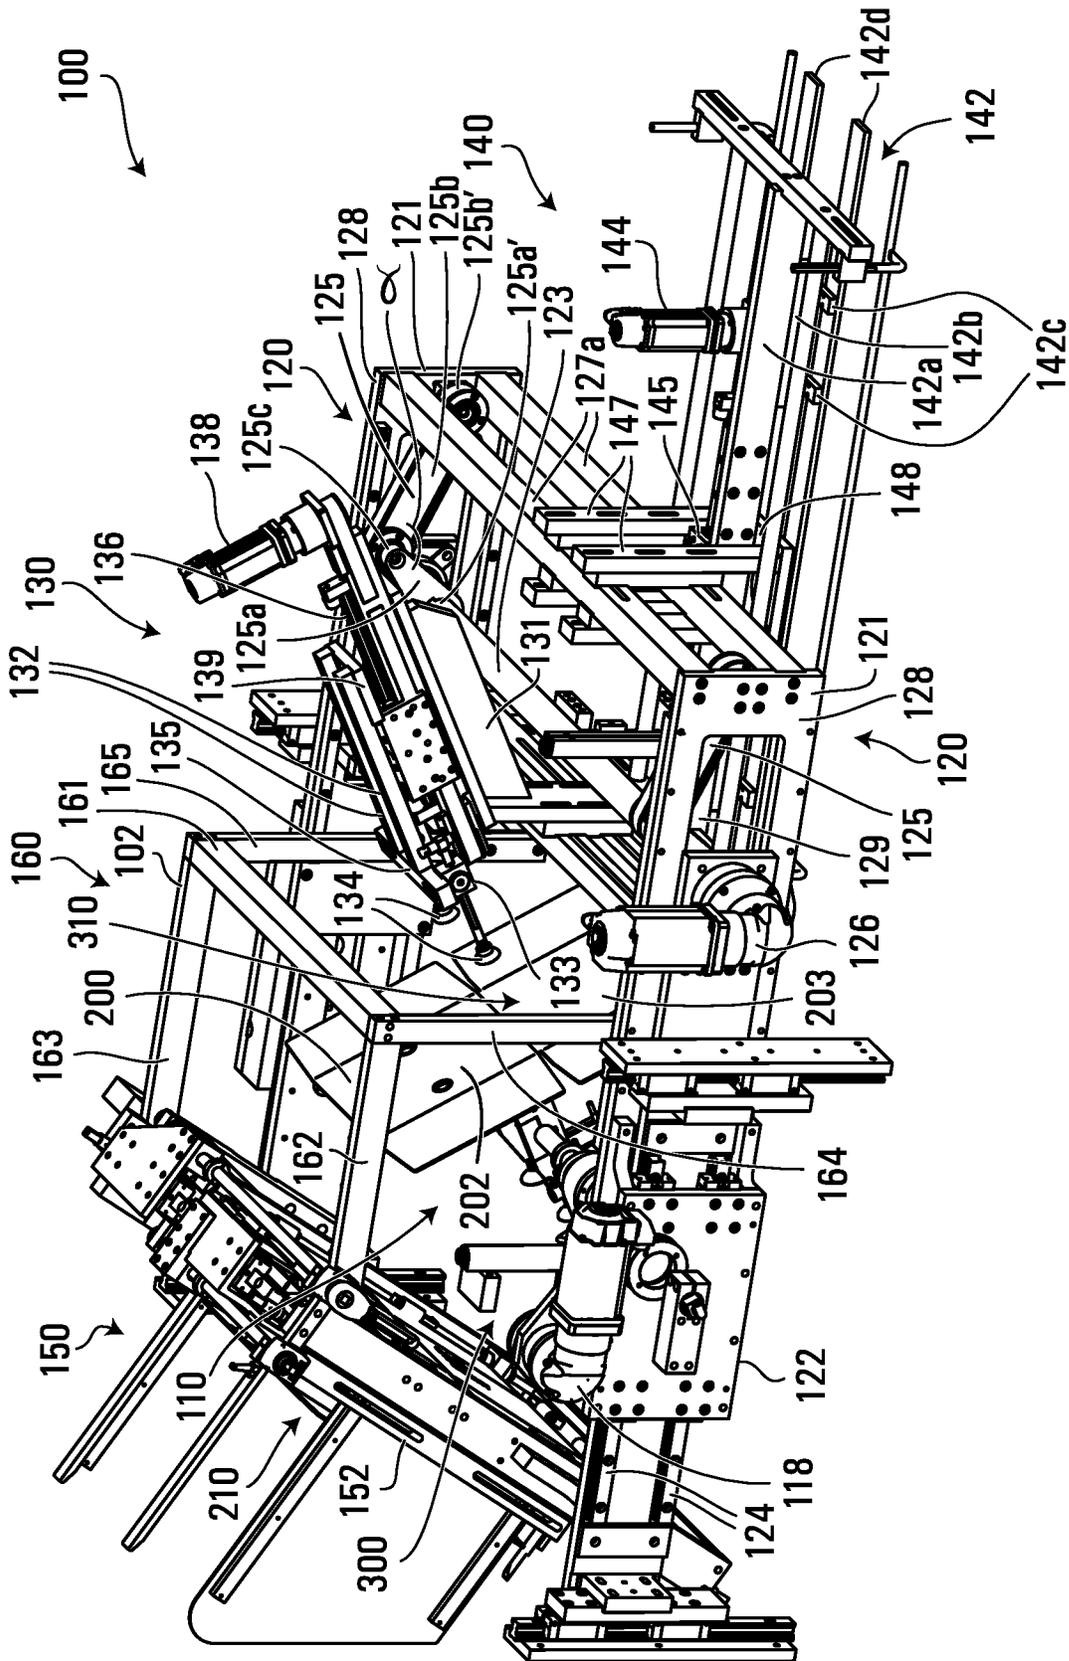


FIG. 8

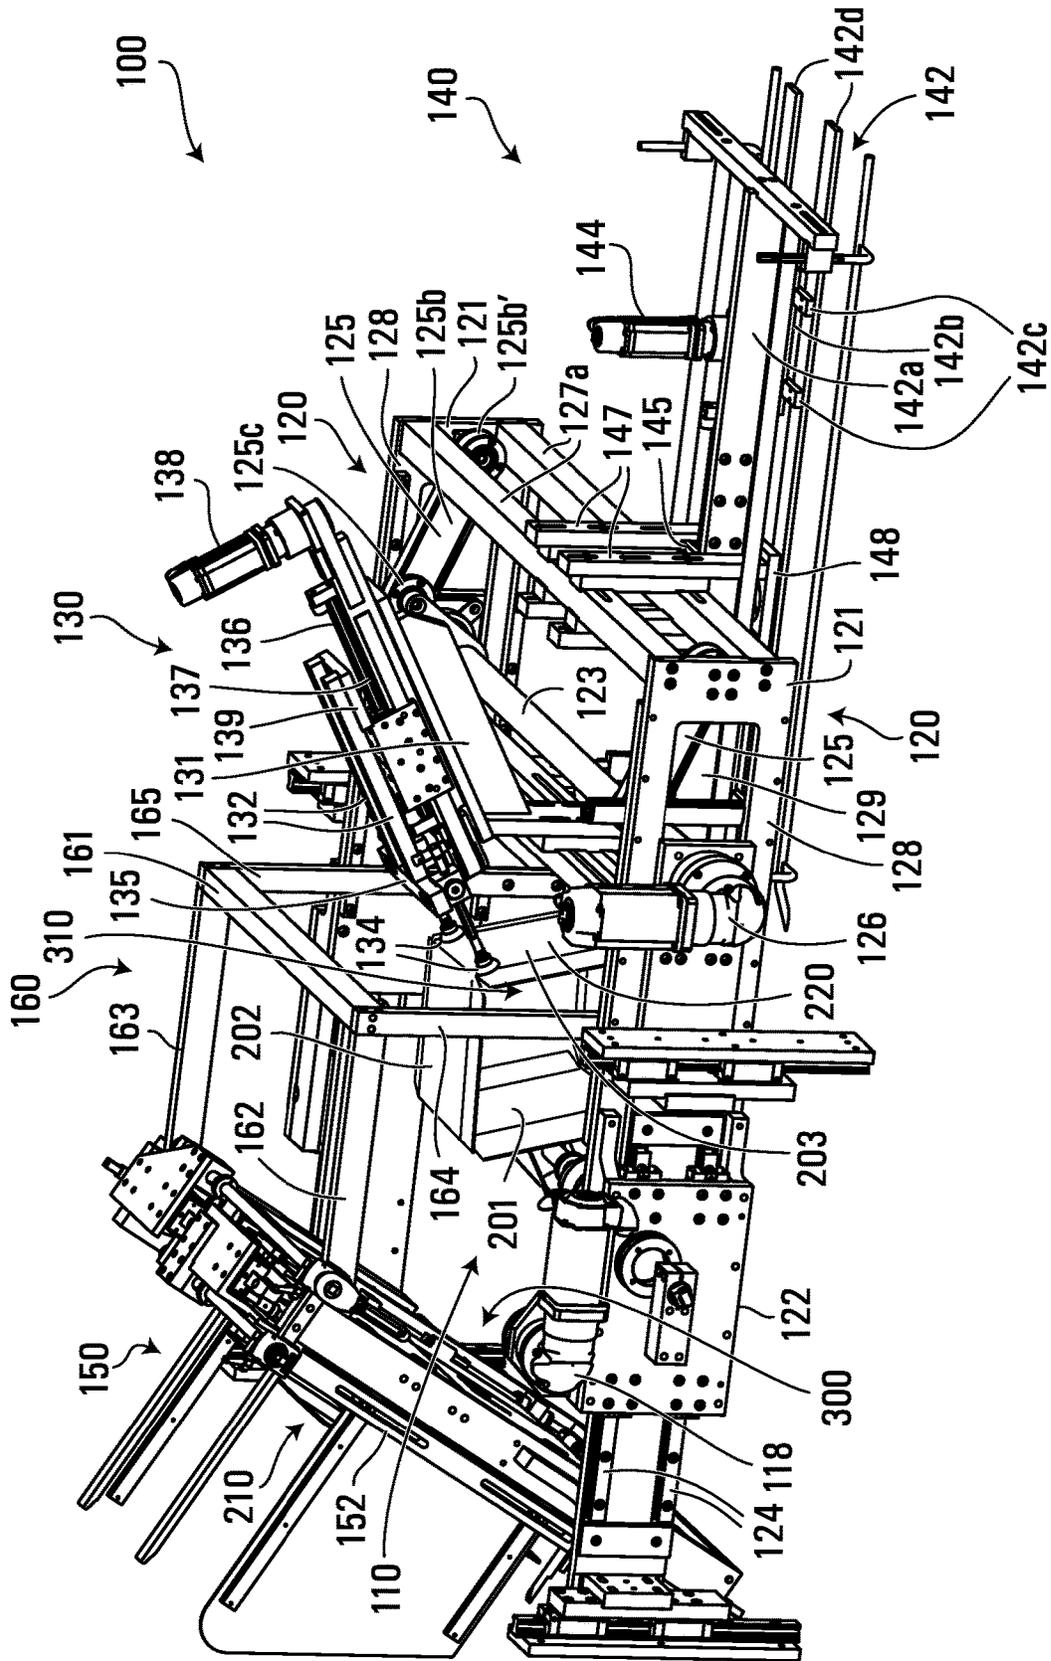


FIG. 10

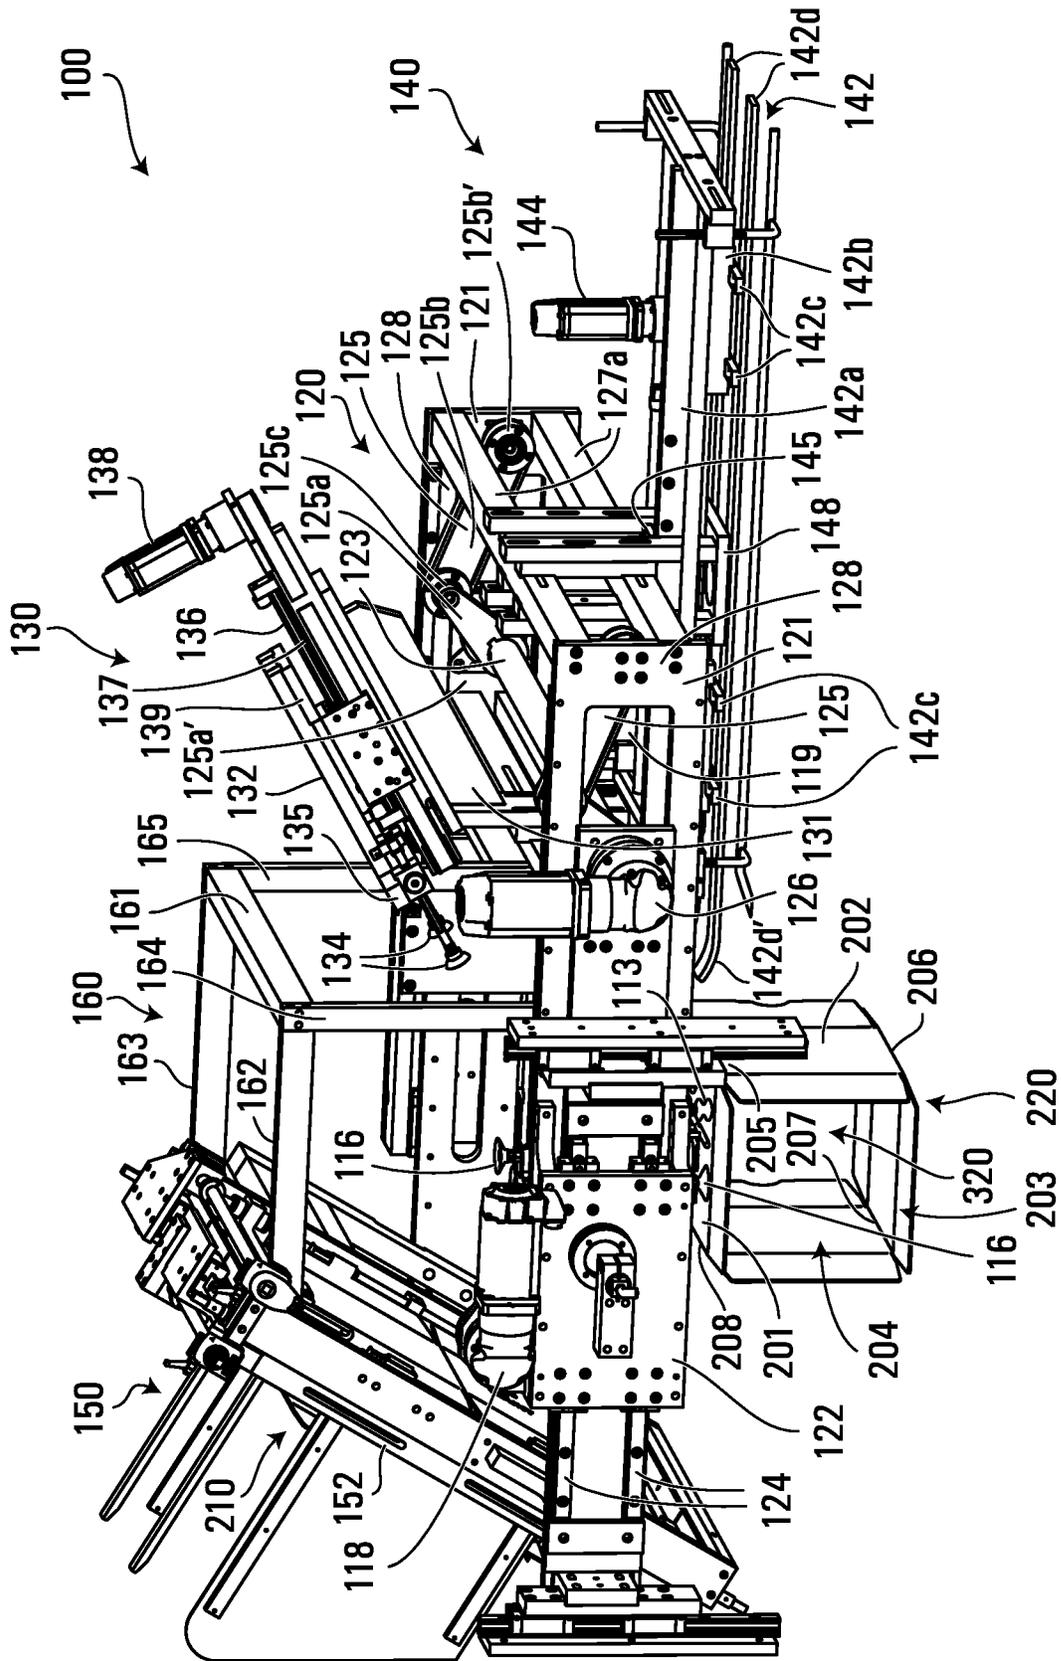


FIG. 11

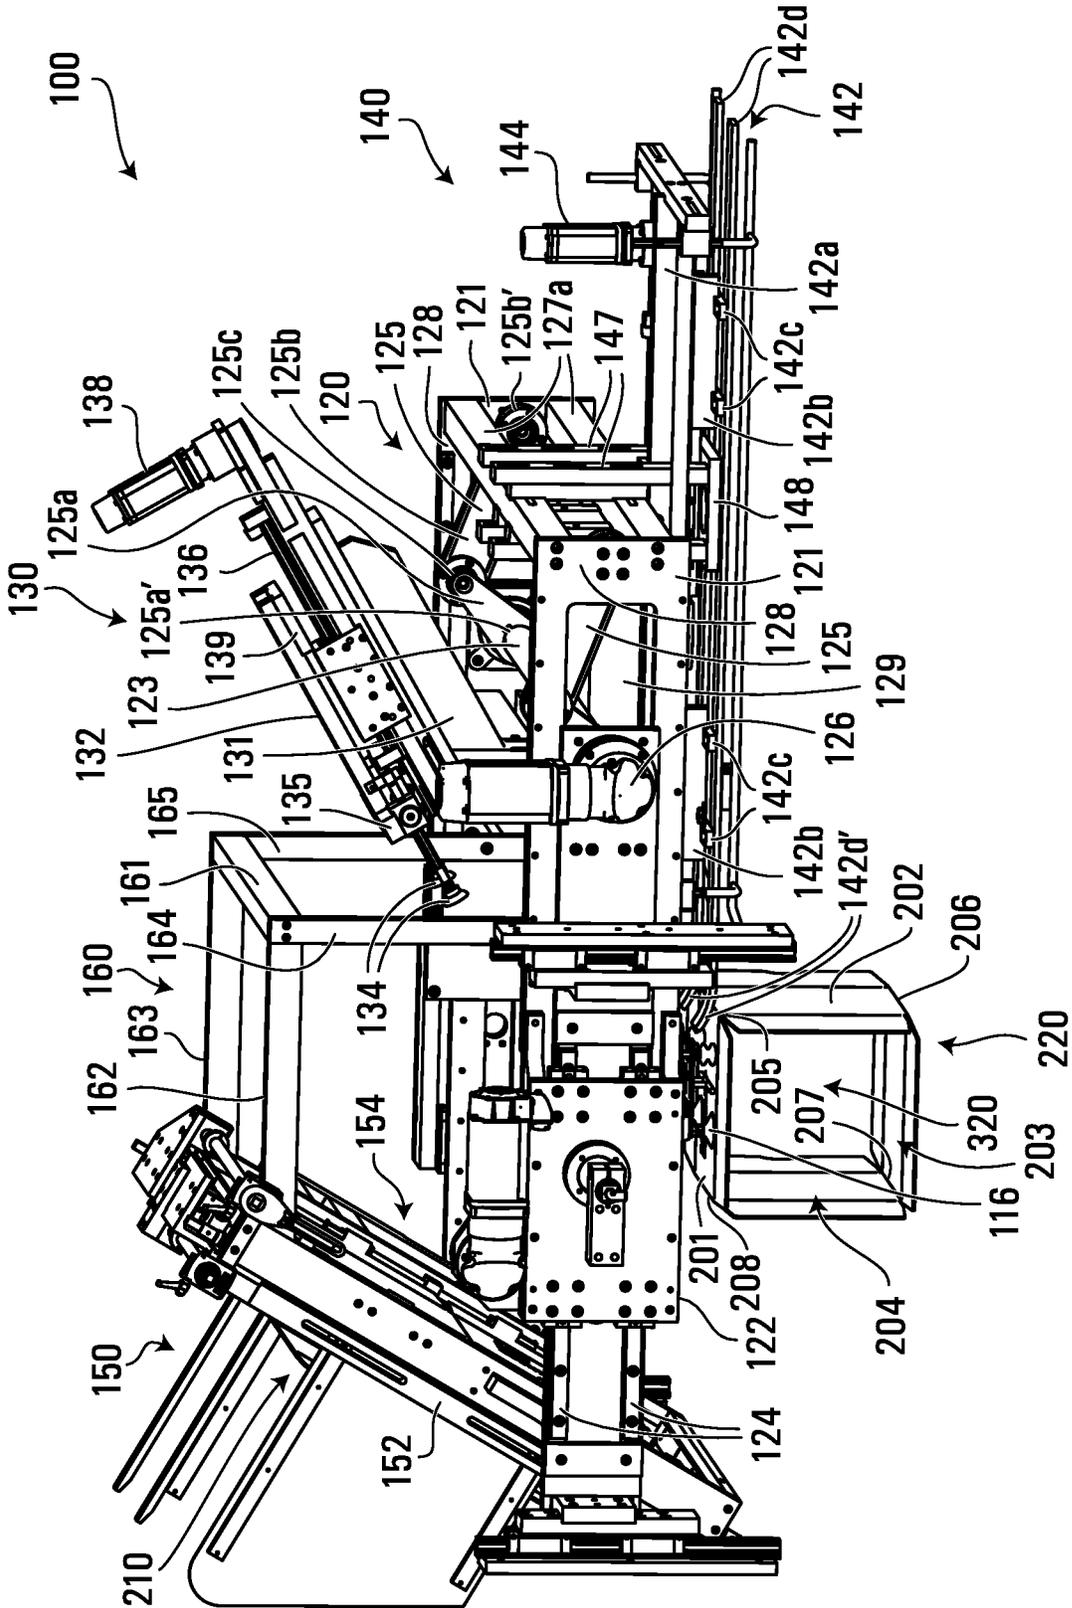


FIG. 12

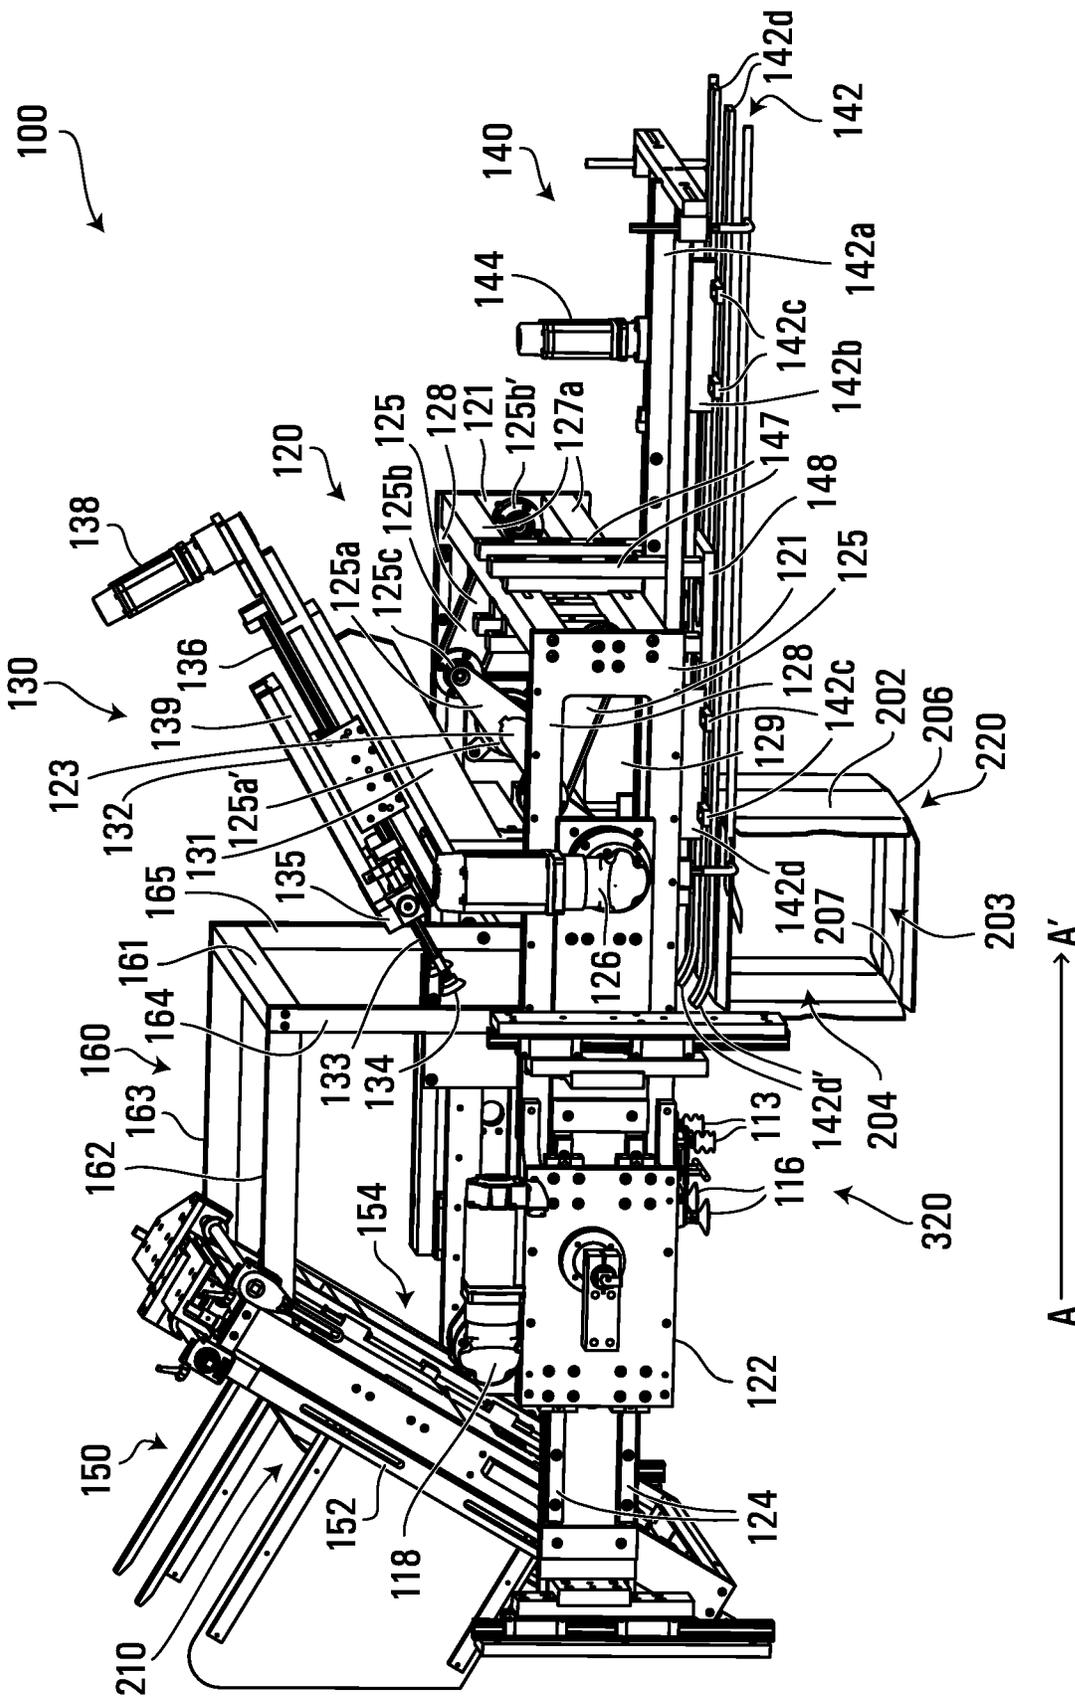


FIG. 13

1

**METHOD AND APPARATUS FOR
RECONFIGURING CONTAINERS****CROSS-REFERENCE TO RELATED
APPLICATION**

This application claims the benefit of U.S. Provisional Patent Application Ser. No. 62/501,562 filed on May 4, 2017. The contents of the aforementioned application are incorporated by reference herein.

FIELD

This disclosure generally relates to methods and apparatus for reconfiguring containers from a first configuration such as a storage configuration to a second configuration such as an erected configuration. Such methods and apparatus may be employed as part of a container packaging system.

BACKGROUND

Containers are used to package many different kinds of items. One form of container used in the packaging industry, generically referred to as a “box”, can be used to hold various items including products and sometimes other boxes containing products. Some in the packaging industry refer to boxes used to package one or more products as “cartons”. In the industry, there are also containers/boxes that are known by some as “cases”. Examples of cases include what are known as a regular slotted case (also referred to as an “RSC”).

In this patent document, including the claims, the words “carton”, “cartons”, “container”, “containers” are used collectively and interchangeably to refer to boxes, cartons, trays, containers and/or cases that can be used to package any type of items including products and other cartons/containers.

Cartons come in many different shapes and sizes and can be made from a wide variety of materials. However, many cartons are foldable and are “formed” when they are erected from a first configuration (eg. a flattened state) commonly referred to as a “carton blank”—to a second configuration (eg. an expanded state). Cartons may be made from an assortment of foldable materials, including but not limited to cardboard, chipboard, paperboard, corrugated fibreboard, other types of corrugated materials, plastic materials, composite materials, and the like and possibly even combinations thereof.

In many known systems, carton blanks may be serially retrieved from a carton magazine, reconfigured from a flattened state into an erected state, and placed in a slot on a carton conveyor. The erected carton may then be moved by the carton conveyor to a loading station where the carton may be filled with one or more items. The loaded carton may thereafter be sealed and/or otherwise closed.

To permit carton blanks to be readily configured for use, such as by reconfiguring them from a storage configuration to an erected configuration, blanks may be held in a storage magazine in a generally completely flattened configuration. An apparatus may be provided to manipulate the blanks such that are folded into a particular erected configuration and sealed to form an erected carton. The sealing process typically involves gluing or taping panels and or flaps/together, and specialized apparatus that handle such flat, unfolded and unsealed carton blanks are known.

Some blanks are provided to users not in a flat, unfolded and unsealed configuration, but rather in what is known as

2

a “knock-down” configuration. Blanks in a knock-down configuration are often referred to as “KD” blanks. KD blanks may take partially folded storage configurations, and they may be partially glued or otherwise sealed along one or more seams (typically along one side seam). As such, KD blanks in a storage configuration typically have generally flattened tubular shapes. Accordingly, the erection of a KD blank may require pulling apart generally opposed panels of the blank (such as wall panels) to reconfigure the blank from a generally flattened tubular configuration to an open tubular configuration. The open tubular configuration, or “erect carton”, may then be suitable for delivery to a carton conveyor for loading/filling and sealing/closing.

After being placed on a carton conveyor, an erect carton may have one end closed by folding and sealing the bottom flaps, so that it can be filled from the opposite end while on the carton conveyor. Any required additional flap folding and sealing, such as for example with glue or tape, can be carried out to close and seal the carton with one or more items contained therein. Alternately, for example the erect carton may be reoriented from a side orientation to an upright orientation with an upward-facing opening and a sealed bottom face. The erect carton may then be moved to a loading station/loading system where it may be top loaded with one or more items. The upward-facing opening may then be closed by folding over and sealing the top flaps.

It is well known that carrying out these types of operations under typical industrial conditions involves machinery which is quite complex. For example, the erection of a KD blank into an erected carton is typically done with an apparatus referred to as a “carton erector” or “carton feeder”. In this patent application, the terms “carton erector” and “carton feeder” are used interchangeably. Carton feeders can be configured to serially retrieve KD blanks from a stack of KD blanks held in a magazine, open them up into erect cartons, and place the erect cartons on a carton conveyor. Carton feeders may use suction cups that employ a suction force to engage and hold the KD blanks. The suction cups are typically mounted on a rotary transfer apparatus and the carton feeder may be configured to move the KD blanks/cartons along a rotational path that is generally arcuate, and which may be cyclical, between the various locations for retrieval, opening and release of an erected carton.

These operations may be executed at high speed and with a high degree of precision in order to provide a reliable and efficient carton feeding process. However, difficulties can arise in designing components that can achieve a clean retrieval, rotation and release by the carton feeder. For example, during retrieval of blanks from a magazine, rotation of the rotary transfer apparatus may result in retrieved KD blanks held by one or more suction cups making contact with one or more of the stack of blanks, the magazine, and the support frame. Undesirable contact may reduce the precision of the retrieval operation, and may lead to issues—especially when the KD blanks/cartons are large and/or are rigid/semi-rigid. For example, the contact may result in the KD blank becoming improperly oriented while being held by the suction cups, with potential problems in the opening of the KD blank and/or its proper placement on a carton conveyor.

Accordingly, an improved system for retrieving a KD blanks, erecting them into cartons and releasing the cartons for further processing is desirable.

SUMMARY

In one aspect, the present disclosure relates to an apparatus the comprises a blank holding apparatus operable to

releasably hold a plurality of carton blanks in a first configuration; a rotary apparatus operable to rotate an engagement device along a rotational path from a first retrieval location where the engagement device is operable to engage with and retrieve a blank from the plurality of blanks held in said blank holding apparatus, to a second operational location; and a movement apparatus inter-connected to said rotary apparatus, said movement apparatus operable to move the rotary apparatus and the engagement device with said engaged blank away from the blank holding apparatus.

In another aspect, the present disclosure relates to an apparatus that comprises a magazine for containing a plurality of flattened tubular container blanks; a rotary apparatus operable to rotate an engagement device along a cyclical rotational path between an on-loading location where the engagement device engages a blank from the plurality of flattened tubular container blanks, an operation location where the blank is at least partially erected into a container, and an off-loading location where the engagement device releases the container; and a slide apparatus comprising a slide assembly on which the rotary apparatus is mounted, the slide apparatus operable to translate the rotary apparatus from a first translational position where said engagement device can engage a blank, to a second translational position away from the magazine to allow the engagement element to traverse the rotational path without causing the blank to contact the plurality of flattened tubular container blanks, and then after the container is released, to translate the rotary apparatus back to the first translational position.

In another aspect, the present disclosure relates to a method of retrieving a blank from a plurality of blanks that comprises rotating an engagement device of a rotary apparatus along a rotational path to a first retrieval location; retrieving a blank from the plurality of blanks with the engagement device; moving the rotary apparatus including the engagement device with the engaged blank away from the plurality of blanks; and rotating the rotary apparatus including the engagement device with the engaged blank to a second operational location.

In another aspect, the present disclosure relates to a method of erecting a flattened tubular container blank into a container, the method comprises retrieving a blank from a plurality of flattened tubular container blanks, at an on-loading position, by engaging the blank with an engagement device which is connected to a rotary member which is mounted on a slide frame; translating the slide frame to bring the rotary member, the engagement element and the blank a distance away from the plurality of flattened tubular container blanks; rotating the rotary member to bring the blank into an operation location and at least partially erecting the blank into a container; and releasing the container from the engagement element at an off-loading location.

Other aspects and features will become apparent, to those ordinarily skilled in the art, upon review of the following description of the specific illustrative embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

Non-limiting embodiments are described in detail below, with reference to the following drawings.

FIG. 1A is a perspective view of part of a carton packing system which includes a carton feeder in accordance with an embodiment.

FIG. 1B is a perspective view of part of the system of FIG. 1A showing components of a carton feeder in isolation.

FIG. 1C is a perspective view of a knock down type carton in a flattened configuration.

FIG. 1D is a perspective view of the carton of FIG. 1C in an erected configuration.

FIG. 2 is another perspective view of the carton feeder of FIG. 1B with some components omitted for simplicity to show a rotary transfer apparatus.

FIG. 3 is another perspective view of the carton feeder of FIG. 1B with some components omitted to show a slide apparatus.

FIG. 4 is a perspective view of the carton feeder of FIG. 1B with some components omitted to show a carton opening apparatus.

FIG. 5 is perspective view of the carton feeder of FIG. 1B with parts omitted to show a hold-down apparatus.

FIG. 6 is perspective view of the carton feeder of FIG. 1B showing the rotary transfer apparatus engaging a KD blank held in a magazine.

FIG. 7 is perspective view of the carton feeder of FIG. 1B showing the slide apparatus in an extended position such that the KD blank is translated away from the magazine.

FIG. 8 is perspective view of the carton feeder of FIG. 1B showing the rotary transfer apparatus having rotated the KD blank into a carton opening location.

FIG. 9 is perspective view of the carton feeder of FIG. 1B showing the carton opening apparatus having moved into an extended position to engage the KD blank.

FIG. 10 is perspective view of the carton feeder of FIG. 1B showing the carton opening apparatus having returned to the retracted position and showing the rotary transfer apparatus having rotated now erect carton from the carton opening location.

FIG. 11 is a perspective view of the carton feeder of FIG. 1B showing the rotary transfer apparatus having rotated the carton into a release location.

FIG. 12 is a perspective view of the carton feeder of FIG. 1B showing a hold-down apparatus having moved into an extended position to facilitate release of the carton from the rotary transfer apparatus in the release location.

FIG. 13 is a perspective view of the carton feeder of FIG. 1B showing the carton having been conveyed away from the release location, and showing the hold-down apparatus having returned to a retracted position.

FIG. 14 is a series of schematic diagrams showing the sequence of movements of components of the carton feeder of FIG. 1B in retrieving, erecting and releasing a KD blank/carton.

DETAILED DESCRIPTION

With reference initially to FIG. 1A, an example carton packaging system **101** is illustrated which may include a blank infeed conveyor sub-system **103**; a carton feeder **100**; a main support frame **104**; a carton conveyor **105**; a carton filling/loading sub-system **106**; and a carton closing sub-system **107**.

The components of carton packaging system **101** may be controlled by a controller generally designated **109** that may include an HMI screen. Controller may for example be a model **1000** controller made by Allen Bradley.

Suitable power sources such as electrical power sources may be provided to supply power to components of system **101**, including components of carton feeder **100**, such as PLC **109** and the various motors, servo drive motors, valves and sensors as described herein.

Carton feeder **100** may be operable to: (i) retrieve flattened tubular carton blanks **200** (hereinafter referred to as KD blanks **200** from a stack **210** of blanks, (ii) erect them

into an at least partially erect cartons **220**; and (iii) release the cartons **220** for further processing/handling.

With reference to FIGS. **1C** and **1D**, each KD blank **200** may be formed with oppositely disposed minor side wall panels **201** and **203** which may be connected to major side wall panels **202** and **204** along hinges **205**, **206**, **207** and **208**. Prior to being erected into carton **220**, KD blank **200** may be folded along hinge lines **206** and **208** with main panel **201** and side panel **202** being disposed on opposite sides of hinge line **205** and main panel **203** and side panel **204** being disposed on opposite sides of hinge **207** such that the KD blank is in a generally flattened configuration. In this configuration, minor side wall panel **201** and major side all panel **204** may be generally disposed in a face-to-face relationship, as may be minor side wall panel **203** and major side wall panel **202**. Each of minor side wall panels **201**, **203** and major side wall panels **202**, **204** may have upper flaps **221a** and lower flaps **221b** that may be connected to their respective side wall panels along hinge lines.

KD blanks **200** may be made of a variety of materials such as cardboard, chipboard, paperboard, corrugated fibreboard, other types of corrugated materials, plastic materials, composite materials, and the like and possibly even combinations thereof. KD blanks **200** may be of any particular shape and may have any particular dimensions. By way of example only, KD blanks **200** when erected may form generally cuboid shaped cartons and may typically have width dimensions **W** and height dimensions **H**.

When held in a blank holding apparatus **150** (see FIG. **1A**), each KD blank in a flattened configuration may have a total length of $2 \times W$ (see FIG. **1C**). It will be appreciated that this length may be quite significant in relation to the dimensions of the components of carton feeder **100** and their relative positioning to each other.

With reference to FIG. **1B**, carton feeder **100** may comprise blank holding apparatus **150**, a carton opening apparatus **130**, a rotary transfer apparatus **110** and a hold-down apparatus **140**. A sub-frame **160**, which may be part of main support frame **104**, may support one or more of the components of carton feeder **100**. For example, blank holding apparatus **150** may be fixedly attached to and supported by sub-frame **160**. Holding apparatus **150** may be configured to hold a stack of blanks **210** that may be comprised of a plurality of KD blanks **200**. By way of example only, stack **210** of KD blanks **200** may comprise between 50 and 80 KD blanks **200**.

Carton feeder **100** may also comprise a translational movement mechanism **240** which may include a sliding apparatus **120**. Sliding apparatus may be operable to move the rotary transfer apparatus **110** such as with translational movement, relative to the blank holding apparatus **150**. Sliding apparatus **120** may include a slide assembly **121**. Components of slide assembly **121** may each be made from one or more suitable materials such as for example steel or stainless steel.

Slide apparatus **120** may also include rail members **124a**, **124b** mounted to a respective support plate **199a**, **199b** (FIGS. **4**, **5** and **6**) that may both be fixedly inter-connected to sub-frame **160** in transverse spaced relation to each other. In some embodiments, the support plates **199a**, **199b** may be mounted to vertical rails and be movable by hydraulic cylinders controlled by PLC **109**, between different vertical positions. Thus slide apparatus **120** may be movable between different vertical positions to accommodate different sized KD blanks **220** being held in blank holding

apparatus **150**. This may assist with the changeover of carton feeder **100** to process a variety of different sized KD blanks **200**.

Sliding apparatus **120** may be configured to be able to move sliding assembly **121** with sliding, reciprocating, translational movement relative to sub-frame **160** on rails **124a**, **124b**. Rotary transfer apparatus **110** may be mounted to and supported on sliding assembly **121** for sliding, reciprocating, translational movement with sliding assembly **121** towards and away from blank holding apparatus **150**.

Components of sliding apparatus **120** such as sliding assembly **121** may be configured to move with reciprocating translational movement relative to sub-frame **160** such that rotary transfer apparatus **110** may be moved in translational movement between a first position which is proximate to storage apparatus **150** (i.e. at a blank retrieval location **300**) and a second position which is at an increased distance from blank holding apparatus **150**.

Rotary transfer apparatus **110** may have at least one engagement device such as pairs of engagement elements **116a**, **116b** (eg. a suction cup) that may be movable along a path, as described further below. In carton feeder **100**, rotary transfer apparatus **110** has one pair of spaced engagement elements **116a** oriented in one direction a second pair of spaced engagement elements **116b** oriented in an opposite direction such that they are oriented at an angle 180 degrees apart.

In overview, rotary transfer apparatus **110** and slide apparatus **120** may provide a mechanism for enabling pairs of engagement elements **116a**, **116b** of rotary transfer apparatus **110** to: (i) successively and serially engage and retrieve KD blanks **200** from storage apparatus **150**, (ii) translate each KD blank **200** in turn away from blank holding apparatus **150**; and (iii) rotate each blank along a rotational path.

In various embodiments, translational movement of the rotary transfer apparatus **110** with engagement elements **116a**, **116b** with the KD blank **200** engaged by the engagement elements **116a**, **116b**, away from the engagement location proximate storage apparatus **150**, may occur at the same time as, during, or prior to commencing, rotation of the KD blank by rotary transfer apparatus **110** on a rotational path away from storage apparatus **150**. This translational movement may minimize or eliminate unwanted contact between KD blank **200** and one or more of stack **210**, blank holding apparatus **150**, and sub-frame **160**.

Rotation of rotary transfer apparatus **110** may also be operable to move engagement elements **116a**, **116b** thereof, and each KD blank **200** secured to the engagement elements, on rotational paths from the engagement location proximate the blank storage apparatus **150**, to a carton opening location **310** which is proximate to carton opening apparatus **130**. In the carton opening location, KD blank **200** may be at least partially opened into an erected carton **220** with the assistance of carton opening apparatus **130**. Further rotation by rotary transfer apparatus **110** of engagement elements **116a**, **116b** on their rotational paths may bring each KD blank **220** (at least partially erected) into a release location **320** which is proximate to hold-down apparatus **140**. At the release location, the KD blank **200** may be reconfigured to its fully erect configuration. This may occur by engagement of the KD blank **200** with a wall of a bucket/slot on carton conveyor **105**. Hold-down apparatus **140** may be operable to stabilize carton **220** as it is released and positioned by engagement elements **116a**, **116b** of rotary transfer apparatus **110** in a bucket/slot of carton conveyor **205**. Rotary transfer apparatus **110** and engagement elements **116a**, **116b**,

in combination with hold-down apparatus **140**, may cooperate to hold erected carton of KD blank **220** in a bucket/slot on carton conveyor **105**.

Once the erected carton **220** has been released from hold down apparatus **140**, slide apparatus **120** may move rotary transfer apparatus **110** and its engagement elements **116a**, **116b** in translational movement back towards blank holding apparatus **150** to permit the rotation of rotary transfer apparatus **110** and engagement elements **116a**, **116b**. Rotary transfer apparatus **110** may also rotate engagement elements **116a**, **116b**. The combined result of such movement is that engagement elements are brought again to a position and are operable to retrieve the next KD blank **200** from the blank holding apparatus **150**. Then the cycle may start again.

Rotary transfer apparatus **110** may rotate the engagement elements **116a**, **116b** in such a manner that first pair of engagement elements **116a** engaging a KD blank **200** may follow the same rotational path as second pair of engagement elements **116b** engaging another KD blank **200**, relative to sliding apparatus **120**, but with the engagement elements **116a**, moving and operating 180 degrees out of phase with engagement elements **116b**.

Now specific components and the operation of carton feeder **100** are hereinafter described in more detail. In general, the components of carton feeder **100** may be made of suitable known materials. For example, some components may be made from suitable steels, aluminum and other metals. Again with particular reference to FIG. 1B, carton holding apparatus **150** may comprise a carton blank magazine **152** which may have a discharge opening **154** through which KD blanks **200** from the stack **210** may be withdrawn in series, one at a time, by engagement elements **116a**, **116b**. Carton storage magazines of this type are well known and, consequently, the mechanism which controls the dispensing of the blanks to ensure that they are discharged one at a time when engaged by engagement elements **116a**, **116b** will not be described in detail herein.

With particular reference back again to FIG. 1A, carton blank magazine **152** may also be equipped with an apparatus for auto-loading KD blanks **200**. Such auto-loading apparatus may be blank in-feed conveyor **103**, which may be loaded manually or automatically (such as with a robotic loader—not shown) at an input end with stacks **210** of flattened KD blanks **200**. Stack in-feed conveyor **103**, under control of PLC **109** may move stacks **210** of KD blanks **200** to the loaded position in magazine **152**, such that stacks of KD blanks can be supplied as necessary to ensure that the blank magazine **152** remains loaded with blanks arranged in series for retrieval.

Magazine **152** may be configured such that KD blanks **200** are oriented in a manner which is favourable for retrieval in series by rotary transfer apparatus **110**. For example, each stack **210** may be oriented such that when held in magazine **152** ready to be retrieved by rotary transfer apparatus **110**, each KD blank **200** is positioned with an engagement surface that lies substantially parallel to the engagement surface of engagement elements **116a**, **116b** when the engagement elements are at the pick-up location as defined by the rotational movement of rotary apparatus **110**.

Magazine **152** may be supported on sub-frame **160** in a cantilevered manner by transversely spaced, longitudinally oriented support beams **162/163** which may be connected to respective vertically oriented support columns **164/165**. Longitudinal beams **162/163** and vertical support columns **164/165** may form components of sub-frame **160**. Sub-frame **160** may also include transverse beam **161** which may fixedly inter-connect, stabilize and support longitudinal sup-

port beams **162** and **163**. Magazine **152** may be positioned and operable to be size adjustable to accommodate KD blanks **200** of varying dimensions.

With particular reference to FIG. 2, rotary transfer apparatus **110** may be any suitable rotary apparatus that is operable to rotate engagement elements, such as opposed pairs of engagement elements **116a**, **116b**, in a desired rotational path. By way of example, rotary transfer apparatus **110** may be configured generally in the same manner as the rotary transfer mechanisms disclosed in U.S. Pat. No. 3,937,458 that issued to Marinus J. M. Langen on Feb. 10, 1976 and U.S. Pat. No. 4,537,587 to Marinus J. M. Langen on Aug. 27, 1985, the entire contents of both of which are hereby incorporated by reference herein.

Rotary transfer apparatus **110** may include a transversely oriented rotary shaft member **112** that may rotate about transversely oriented axis X1 (FIG. 2). Rotary transfer apparatus **110** may include a gearing mechanism **117** configured to provide a desired cyclical path of rotary shaft member **112** relative to the sliding assembly components of sliding apparatus **120** to which rotary transfer apparatus **110** is mounted, as well to provide for a desired rotational movement of rotary shaft member **112** about its own transversely oriented axis X1 (FIG. 2).

With particular reference to FIGS. 3 and 6, rotary transfer apparatus **110** may be mounted to a slide assembly **121** of slide apparatus **120** via a slidable support bracket/carriage **122a** that may be mounted on vertically spaced rails **124a**. Rails **124a** may be mounted to support plate **199a** (FIG. 6) that is attached to sub-frame **160**. Thus rails **124a** may be fixed relative to sub-frame **160** allowing bracket/carriage **122a** to slide on rails **124a** with sliding longitudinal movement. As can be seen in FIG. 3, a corresponding set of rails **124b** may provide support for a corresponding bracket/carriage **122b**. Rails **124b** may be mounted to a support plate **199b** (FIG. 3) that is attached to sub-frame **160**. Thus rails **124b** may be fixed relative to sub-frame **160** allowing bracket/carriage **122b** to slide on rails **124b** with sliding longitudinal movement. However, bracket/carriage **122b** in the illustrative embodiment does not support a side of rotary transfer apparatus **110**. Bracket/carriage **122a** may be interconnected to bracket/carriage **122b** such that they move together in reciprocating translational longitudinal movement.

As shown, rotary shaft member **112** along with gearing mechanism **117** may be rotatably mounted in a cantilevered manner from support bracket **122**. In other embodiments, carriage **122b** may support an opposite side of rotary transfer apparatus.

Bracket/carriage **122a** may also be interconnected and secured to a longitudinally and vertically oriented plate member **128a** forming part of slide assembly **121** of slide apparatus **120** (see FIG. 6). Thus plate member **128a** and bracket carriage **122a** may move and be supported together on rail **124a**. Bracket/carriage **122b** may also be interconnected and secured to another transversely spaced and longitudinal and vertically oriented plate member **128b**, also forming part of slide assembly **121** of slide apparatus **120**. Thus plate member **128b** and bracket carriage **122a** may move and be supported together on rail **124b**. The driven movement of slide plates **128a**, **128b** as described further hereinafter, can drive the bracket/carriages **122a**, **122b** in reciprocating translational longitudinal movement, and thus also move the rotary transfer apparatus **110** mounted to bracket/carriage **122a** in the same movement.

With particular reference to FIG. 2, a plurality of radial arms **114** may extend radially outwards from and be fixed to

rotary shaft member **112**. In this case, there is a transversely spaced pair of radial arms **114**, each transversely spaced apart from each other. Each radial arm **114** has a first portion **114a** extending radially outwards from rotary shaft member **112** in one direction and a second portion **114b** extending radially outwards from rotary shaft member in an opposite direction to first portion **114a**, such that first portion **114** and second **114b** are oriented 180 degrees apart from each other. The result is that there are a pair of spaced first radial arm portions **114a** extending in one direction and a pair of spaced second radial arm portions **114a** extending at 180 degrees to the pair of first radial arm portions **114a**. Each of the radial arm portions **114a**, **114b** may include a pick up element **116** proximate an end thereof. Each engagement element **116** may be a vacuum-actuated suction cup coupled to a vacuum generator. Apparatus for providing vacuum from a stationary vacuum generator to a plurality of continuously rotating suction cups are known in the art (e.g. U.S. Pat. No. 3,937,458). Separate vacuum generators **195a**, **195b** (FIG. 4) may be mounted on shaft member **112** and/or arms **114** near to the suction cups/engagement elements **116a**, **116b**. Vacuum generators **195a**, **195b** may use compressed air supplied by pipes (not shown) at an inlet and convert the compressed air into a stream of attracted air (i.e. a vacuum) which is in air communication via tubes/passageways with the suction cups/engagement elements **116a**, **116b**. An example of a vacuum generator that would be suitable for use in carton feeder **100** is produced PIAB AB under model no. PCL.X4BN.S.EE.SV.

Valves (not shown) may be provided in the supply of pressurized air to the vacuum generators and the valves may be controlled by PLC **109** based on signals provided by an encoder associated with servo drive motor **118** (as described below) associated with rotary transfer apparatus **110**. PLC **109** may thus control the turning on and off of suction of engagement members **116a**, **116b** during movement about the rotational and translational path (i.e. turn the suction on and off depending upon the position of each of pairs of engagement members **116a**, **116b**).

The first radial arm portions **114a** are transversely spaced apart and operable such that first pair of engagement elements **116a**, can engage, rotate and release KD blanks **200** they retrieve from blank holding apparatus **150**. The second radial arm portions **114b** move and operate out of phase by 180 degrees to the first radial arm portions **114b**, and second radial arm portions **114b** are also operable such that the second pair of engagement elements **116b** can separately engage, rotate and release KD blanks **220** they retrieve from the blank holding apparatus **150**.

Rotary transfer apparatus **110** may be configured such that first and second pairs of radial arm portions **114a**, **114b**, and in particular the respective engagement elements **116a**, **116b** secured thereto, move in a rotational path (and in particular a hypotrochoidal/hypocycloidal cyclical path relative to the sliding components of sliding apparatus **120** like the suction cups of the rotary transfer mechanisms in U.S. Pat. Nos. 3,937,458 and 4,537,587).

With particular reference to FIGS. 2 and 4, each pair of first radial arm portions **114a**, and each pair of second radial arm portions **114b** may also have a support platform **111** mounted proximate and extending between the end of the respective pairs of radial arm portions **114a**, **114b**. Support elements **113**. Support elements **113** which may be rubber pad members may be attached to and extend generally radially outward from support platforms **111**. Support elements **113** and support bar **191** co-operate with engagement elements **116a**, **116b** during retrieval and movement of a KD

blank **200** engaged by engagement elements **116a**, **116b**. The number, location and configuration of engagement elements **116a**, **116b**, support bar **191** and support elements **113** on each platform **111** may vary provided they facilitate the rotational movement of KD blank **200** by rotary transfer apparatus **110**. Engagement elements **116** and support elements **113** may be positioned substantially at the four corners of platform **111** which may be orthogonally mounted between one of first radial arms portions **114a** or second radial arm portions **114b**. The positions of support bar **191** and support elements **113** may be adjusted to suit the particular dimensions of the particular KD blank **200** being processed.

Rotary shaft member **112** may, by way of example only, be typically in the range of between 24 and 36 inches in length.

Rotary shaft member **112** may be made of any suitable material (such as steel or stainless steel) which is suitably strong and rigid to support plurality of radial arms **114**, platforms **111**, support elements **113** and engagement elements **116** (as well as KD blank **200**) and be able to withstand the forces imparted thereon during operation. Likewise, radial arms **114** and platforms **111** may be made from suitable materials such as aluminum or be plastic 3D printed.

With particular reference to FIG. 2, rotary transfer apparatus **110** may also include a drive belt **119**, and a servo drive motor **118**. Rotary shaft member **112** may be inter-connected to drive wheel **115** of servo drive motor **118** by way of drive belt **119** and gear mechanism **117**. Servo drive motor **118** may in operation drive the drive belt to move the rotary shaft member **112** in a cyclical rotational path relative to bracket/carriage **122**. Servo drive motor **118** may include an encoder and may be in communication with **109** such that the rotational movement of rotary transfer apparatus **110** including rotary shaft member **112**, and the arms **114** and engagement members **116a**, **116b**, that are fixedly secured thereto, can be controlled by PLC **109**. The type of specific mechanisms that would be operable to drive rotation of such components of a rotary transfer mechanism via a servo motor/belt/gear mechanism are known to those skilled in the art. Servo drive motor **118** may be any type of servo drive motor which is capable of driving the rotational movement of rotary shaft member **112**. For example, servo drive motor **118** may be a model VPL-A1003F made by Allen Bradley. Servo drive motor **118** may, by way of example only, drive the rotation of rotary member **112** at a maximum rotational speed between 10 and 400 rpm. Servo drive motor **118**, drive belt **119**, gear mechanism **117**, and rotary shaft member **112** may be mounted on support bracket/carriage **122** for sliding translational longitudinal movement together relative to sub-frame **160**. Bracket/carriage **122** may be part of a slide assembly **121** of slide apparatus **120**. The sliding movement of bracket/carriage **122**, as part of slide assembly **121**, may provide for the translational movement of rotary transfer apparatus **110** between proximate and distal positions relative to blank holding apparatus **150**.

With particular reference to FIGS. 2, 3, 4, 5 and 6, as described above, slide assembly **121** may include transversely spaced, vertically and longitudinally oriented, sliding plates **128a**, **128b**. Sliding plates **128a**, **128b** may each be attached to brackets/carriages **122a**, **122b**, such that together they are configured to be supported on and move with sliding motion longitudinally relative to, respective transversely spaced, longitudinally oriented rails **124a**, **124b** (See FIG. 3).

Guide rails **224a** may be mounted to sliding plate **128a** (FIG. 6) and guide rails **224b** may be mounted to sliding plate **128b** (FIG. 5). Vertical support plates **240a**, **240b** may also be secured to sub-frame **160** (See FIGS. 3 and 4) to provide transverse guides for movement of sliding plates **128a**, **128b**.

As indicated above, support bracket/carriage **122a** may be fixedly secured to slide plate **128a**. Rotary transfer apparatus **110** may thus be interconnected to slide plate **128a** via bracket **122**/carriage, and slide plates **128a**, **128b** may be configured to translate together along respective rails **124a**, **124b**. Thus, slide plates **128a**, **128b** may be configured to have reciprocating translational movement in the longitudinal direction relative to sub-frame **160**, and thus provide for the reciprocating translational movement of rotary transfer apparatus **110** in a longitudinal direction relative to blank holding apparatus **150**.

Slide plates **128a**, **128b** may be fixedly spaced relative to each other by interconnecting transverse beams **127a** and **127b** (FIG. 5). An opening **129** may be provided between slide plates **128a**, **128b**/rails **224a**, **224b** and beams **127a**, **127b**. Transverse beams **127a** and **127b** may be fixed at generally right angles to longitudinal sliding plates **128a**, **128b** such that parts of slide assembly **121** form edges of a generally rectangular prism.

Also as shown in FIG. 3, slide apparatus **120** may also comprise a servo drive motor **126**, a drive shaft **123** and linkage mechanism **125**. Servo drive motor **126** may be mounted to fixed plate **199a** (FIG. 5) and be configured to drive the rotation of drive shaft **123** about a transverse axis **X2** (FIG. 3) through drive shaft **123**, and both these components may be fixed relative to sub-frame **160** such that they do not translate in longitudinal movement with slide assembly **121**. An opposite end of drive shaft **123** may be mounted in an opening **198b** containing a rotatable bearing in fixed plate **199b** (FIG. 3).

Servo drive motor **126** may be any type of servo drive motor which is capable of driving the rotational movement of rotary drive shaft **123** about axis **X2** in both clockwise and anti-clockwise directions. For example, servo drive motor **126** may be a model VPL-A1153C made by Allen Bradley.

Servo drive motor **126** may include an encoder and may be in communication with PLC **109** such that the rotational movement of rotary drive shaft **123**, and the linkage mechanism **125** connected thereto, can be controlled by PLC **109**.

Linkage mechanism **125** may be configured to convert the rotation of rotary drive shaft **123** into the translational longitudinal movement of slide assembly **121**. For example, linkage member **125** may have a first portion **125a** with a distal end **125a'** which is keyed to drive shaft **123**, a second portion **125b** with a distal end **125b'** which is rotatably fixed to slide assembly **121**, and a hinge portion **125c** which connects adjacent ends of first and second portions **125a**, **125b** and defines an angle α between first portion **125a** and second portion **125b**. In this configuration, distal end **125a'** of linkage member **125** is fixed from longitudinal translational movement due to its connection with drive shaft **123**. In contrast, distal end **125b'** of linkage member **125** is translatable due to its connection with slide assembly **121**.

Referring to FIG. 3, the transfer of rotational motion of rotary drive shaft **123** to reciprocating translational longitudinal motion of slide assembly **121** may be provided as follows: (i) rotation of drive shaft **123** in a first counter clockwise direction may rotate first portion **125a** towards transverse beams **127a** of slide assembly **121**, (ii) this rotation may "push" distal end **125b'** of second portion **125b** away from drive shaft **123** (increasing angle α at hinge

portion **125c**), and (iii) the vertically and transversely fixed, pivotal connection between distal end **125b'** of second portion **125b** and slide assembly **121** may cause slide assembly **121** to translate in a longitudinal direction along rails **124a**, **124b**. Thus, rotation of drive shaft **123** in the first counter-clockwise direction may cause slide assembly **121**, and rotary transfer apparatus **110** mounted thereon, to translate away from blank holding apparatus **150**.

Rotation of drive shaft **123** in a second clockwise direction (opposite to the first direction), may return first portion **125a** of linkage member **125** to its earlier position, which may "pull" slide assembly **121** back to its earlier position as angle α is decreased. As rotary transfer apparatus **110** may be mounted on slide assembly **121** (via bracket **122**), the rotation of drive shaft **123** in the second direction may return rotary transfer apparatus **110** to its earlier position proximal to blank holding apparatus **150** (i.e. pick-up/retrieval location **300**).

The slide apparatus **120**, including slide assembly **121** and linkage mechanism **125**, and drive shaft **123** may be configured such that servo drive motor **126** may, by way of example only, drive the rotation of drive shaft **123** through only a portion of a full rotation, such as for example an angle of rotation of 120 degrees. In an example embodiment, this may equate to a longitudinal translation of slide assembly **121** by a distance of between about 5 and 10 inches. In particular, the components may be configured such that servo drive motor **126** may drive the longitudinal translation of slide assembly **121** a distance of about 7 inches. The distance travelled by slide assembly **121** may be adjusted to account for various processes including the size and shape of KD blank **200** and the sizes of the various components of carton feeder **100**.

Drive shaft **123** may be in some embodiments be between 24 and 36 in length and between 1 and $\frac{1}{4}$ and 1 and $\frac{1}{2}$ inches in diameter. Drive shaft **123** and linkage mechanism **125** may be made of one of more materials which are suitably strong and rigid to withstand the torsional force required to translate slide assembly **121** such as steel.

As noted above, drive shaft **123** may be rotatably mounted such that it does not translate with slide assembly **121**. Openings **129** in longitudinal plates **128a**, **128b** allow for the translational motion of slide assembly **121** without interfering with the fixed longitudinal position of drive shaft **123** relative to sub-frame **160**.

Slide apparatus **120** may comprise any number of linkage mechanisms **125**. Preferably, slide apparatus **120** comprises two linkage mechanisms **125** spaced transversely apart from each other such as having with one proximate each end of drive shaft **123**. Each linkage mechanism **125** may take a number of different configurations to transfer the rotational movement of drive shaft **123** into the longitudinal translation of slide assembly **121**.

In other embodiments, other drive mechanisms are contemplated for driving the translational movement of slide assembly **121** and/or rotary transfer apparatus.

As best seen in FIGS. 4 and 6, carton feeder **100** may also comprise carton opening apparatus **130**. Carton opening apparatus **130** is an example of what is sometimes referred to as a type of "pre-break" mechanism. An example of such as carton opening mechanism is disclosed in U.S. Pat. No. 4,537,587 as referred to above.

In carton feeder **100**, carton opening apparatus **130** may comprise a pair of transversely spaced blank releasable panel attachment elements **134** (which may be suction cups as described above). Attachment elements **134** may be supported on fixtures **133**. Fixtures **133** may be hollow rigid

13

tube members that may be in air flow communication with the outlet of vacuum generators 239. Vacuum generators 239 may themselves be supported on a common transversely oriented support bar 135. Transverse support bar 135 may be supported by a pair of transversely spaced, longitudinal bars 132. Bars 132 may be mounted to a support plate 139. Support plate 139 may be mounted on a rail carriage 241 that may be movable along a rail 136.

Rail 136 may be fixedly interconnected to sub-frame 160. This may be accomplished by centrally mounting rail 136 on a support plate 260. Support plate 260 may be supported proximate one end thereof to a support bracket/post 131 that may be oriented vertically.

Vacuum generators 239 may be mounted on transverse bar 135 by having rods (not shown) engaging with slots 243 such that vacuum generators 239 and their fixtures 133 and attachment elements 134 may be selectively positioned along transverse bar 135. This may provide a mechanism to facilitate the adjustment of the spacing of multiple attachment elements 134 to allow for engagement with various sizes/shapes of KD blanks 200.

Preferably, releasable attachment elements 134 may be vacuum-actuated suction cups coupled to a vacuum generator. Similar to the vacuum generators referenced above, separate vacuum generators 239 may be mounted to transverse bar 135 any fixtures 133 may be mounted to an outlet of the vacuum generators 239. A vacuum generator suitable for this use is produced by PIAB AB sold under model no. PCL.X4BN.S.EE.SV.

Valves may be controlled by PLC 109 based on signals provided by an encoder associated with servo drive motor 118 (as described below) associated with rotational movement of rotary transfer apparatus 110 and signals provided from the encoder associated with servo drive motor 121 that are indicative of the translational movement and position of slide assembly 121 and rotary transfer apparatus 110. PLC 109 may thus control the actuation of suction of attachment elements 134 (i.e. turn the suction on and off depending upon the position of each of the pairs of attachment elements 134 and the position of the rotary transfer apparatus 110 and the engagement elements 113a, 113b).

Continuing with FIG. 4, angled bracket 131 may be mounted on transverse bars 127b. Transverse bars 127 may be affixed at each end to upper and lower rails 124a and 124b. Rails 124a may be secured to vertical support plate 240a which may be interconnected to sub-frame 160. As such, angled bracket may be fixed relative to support frame, and thus carton opening apparatus 130 will not translate with the longitudinal movement slide assembly 121 of rotary apparatus 110.

Support plate 139 may be mounted on a rail carriage 241 that may be movable along a rail 136.

Still with reference to FIG. 4, carton opening apparatus 130 may also comprise a servo drive motor 138, a drive belt 137 which may be interconnected to rail carriage 241. Servo motor 138 may be in communication with and be controlled by PLC 109. Servo drive motor 138 may drive the drive belt 137 which may longitudinally translate rail carriage 241, and the components referenced above that are attached thereto, with reciprocating longitudinal movement. As such, servo drive motor 138 may be configured to drive the longitudinal translation of attachment elements 134 relative to sub-frame 160 and may be able to move attachment elements relative to engagement elements 116a, 116b of rotary transfer apparatus 110. This allows for the controlled movement of attachment elements 134 into/out of carton opening location 310 for interaction with KD blank 200.

14

Servo drive motor 138 may be any type of servo drive motor which is capable of driving belt 137. For example, servo drive motor 138 may be a model VPL-A0633F made by Allen Bradley. Servo drive motor 126 may include an encoder and may be in communication with PLC 109 such that longitudinal position of attachment elements 134 relative to sub-frame 160, and relative to engagement elements 116a, 116b can be controlled by PLC 109.

Servo motor 138 may drive the translation of attachment elements 134 a distance of 7 inches. The distance travelled may be adjusted to account for various process including the size and shape of KD blank 200/carton 220

Rail 136 may be made of any material which is strong enough to support the translation of carriage 139 and the components which translate therewith. Rails 136, and any other linear rails used in the system may be for example Bosch Rexroth standard rails with sliding blocks size 15 or 20.

As best seen in FIG. 5, carton erector 100 may further comprise hold-down apparatus 140. Hold-down apparatus 140 is an example of a release assistance and stabilization mechanism. Hold-down apparatus 140 may comprise hold-down members 142d, a rail 141, a drive belt 146, a servo drive motor 144, and a carriage 145. Hold down members 142b may be operable for limited reciprocating longitudinal movement and may engage a top surface area of a carton erected from a KD blank 200 once it has been deposited in a carton conveyor 105.

Hold-down apparatus 140 may be mounted to the rear of slide assembly 121 such that it moves in translational longitudinal movement with sliding assembly 121 and rotary transfer apparatus 110.

Hold down apparatus 140 may also include vertical columns 147 which may be fixedly attached to transverse beams 127a of slide frame 121. A plate 148 may be mounted to columns 147 such that plate 148 hangs from slide frame 121 in a substantially horizontal configuration. Rail 141 may be fixedly mounted to plate 148, and belt 146/servo drive motor 144 may also at least in part be supported by plate 148. The servo drive motor 144 and belt 146 may be configured to drive and translate carriage 145 in reciprocating longitudinal movement along rail 141.

Staying with FIG. 5, hold-down apparatus 140 may further comprise a hold-down assembly 142 which may comprise a longitudinal beam 142a, a spacer 142b, a transverse bracket 142c and hold-down members 142d having a proximal end 142d'. Longitudinal beam 142a may be fixedly attached to carriage 145 such that it translates therewith along rail 141. Hold-down members 142d may be fixedly attached to longitudinal beam 142a by way of spacers 142b and transverse brackets 142c. As such, hold-down members 142d may translate, along with the other components of hold-down assembly 142, with carriage 145. Taken together, the components of hold-down apparatus 140 provide a mechanism which is fixedly mounted to slide frame 121 such that it moves therewith through the actions of slide apparatus 120, and which additionally provides for the longitudinal reciprocating translation of proximal ends 142d' of hold-down members 142d relative to rail 141 under the control of PLC 109 into/out of release location 320 to facilitate the release of carton 220 from engagement elements 116a, 116b of rotatable transfer apparatus 110 (see FIGS. 14(J-K and K-A).

Columns 147 and plate 148 may, independently, be of any shape, size or materials, provided that they cooperate to provide a platform for carriage 145 to translate along rail 141 as driven by belt 146 and servo motor 144.

Servo drive motor **144** may be any type of servo drive motor which is capable of driving belt **146**, carriage **145**, and the other components connected thereto. For example, servo drive motor **144** may be a model VPL-A0633F made by Allen Bradley. Servo drive motor **144** may include an encoder and may be in communication with PLC **109** such that longitudinal position of hold down members **142d** relative to rail **141**, and relative to the slot on conveyor **105** at the release location holding an erected deposited carton, can be controlled by PLC **109**.

Servo motor **144** may by way of example only drive the translation of hold down members **142d** a distance of in the range of 4 to 12 inches. The distance travelled may be adjusted to account for various factors including the size and shape of KD blank **200**/carton **220**.

Each component of hold-down apparatus **142** may be of any size, shape and material provided that they cooperate to facilitate the release of carton **220** at release location **320**. For example, hold-down member **142d** may be ski-, rod-, or bar-shaped, and proximal ends **142d'** of hold-down member **142** may be curved upwards to better facilitate the release of carton **320** from rotary transfer apparatus **110**.

In operation, carton feeder **100** including rotary transfer apparatus **110** and each set of its engagement elements **116a**, **116b**, may pass through the sequence of configurations generally set out in FIGS. 6-13. FIG. 14 provides a series of schematic sequential diagrams of the movement of components associated with a set of engagement elements **116a**, **116b** of carton feeder **100** in diagrams listed as (A)-(K). It shows in isolation only the movements of the components associated with the cycle of movement of only one of the sets of engagement elements **116a** through the pick-up, blank opening and carton drop off sequence of movement. It will be appreciated that the movements of carton feeder **100** associated with one set of engagement elements **116a** will be the same as the movements of carton feeder **100** associated with the other set of engagement elements **116b**, but they will be moving 180 degrees out of phase with each other. However, the engagement elements **116a** will follow the same overall path as the engagement elements **116b**. During operation, the path for each engagement elements **116a**, **116b** will be a combination of the rotational path imparted by the rotary transfer apparatus **110** and the reciprocating longitudinal translational movement imparted by the slide apparatus **120**, evident from the following description with reference to FIGS. 6 to 14.

Referring to FIGS. 6 and 14(A), rotary transfer apparatus **110** and engagement elements **116a** may be positioned in an engagement position to engage with and retrieve KD blank **200** from stack **210** while held in blank holding apparatus **150**. Slide apparatus **120** may be in its retracted position towards blank holding apparatus **150** and sliding assembly **121** may be stationary relative to sub-frame **160**. The pair of engagement elements **116a** may be positioned to engage KD blank **200** in retrieval/engagement location **300**. Rotation of engagement elements **116a** by rotary transfer apparatus **110** may have ceased, if only for a very short time when engagement elements **116a** engage with the KD blank **200**. PLC **109** may operate carton feeder **100** to provide a vacuum force at engagement elements **116a** to enable them to engage with a facing surface of KD blank **200** and retrieve a KD blank from blank holding apparatus **150**.

Referring to FIGS. 7 and 14(B), after KD blank **200** has been engaged by engagement element **116**, there may still be no rotation of engagement elements **116a** commenced by rotary transfer apparatus **110**. Slide apparatus **120** may however be engaged by PLC **109** to move the slide assembly

121 including hold down apparatus **140**, into its extended position further away from blank storage apparatus **150** (via rotation of drive shaft **123** by servo drive **128** and translation of slide assembly **121**). The translational movement of slide assembly **121** with rotary transfer apparatus **110** interconnected thereto may provide a clearance space between retrieved KD blank **200** and stack **210** as retrieved KD blank **200** is translated away from retrieval location **300**. This clearance space allows the engagement elements **116a** to rotate the KD blanks **200** without the KD blank interfering with or contacting the blank holding apparatus **150** or the plurality of KD blanks still held therein.

In some embodiments, the clockwise rotation of engagement elements **116a** may be commenced by rotary transfer apparatus **110** after time slide assembly **121** starts to move the rotary transfer apparatus **110** in translational movement away from blank holding apparatus **150**. In some embodiments, the clockwise rotation of engagement elements **116a** may be commenced by rotary transfer apparatus **110** at the same time slide assembly **121** starts to move the rotary transfer apparatus **110** in translational movement away from blank holding apparatus **150**. In other embodiments, the clockwise rotation of engagement elements **116a** may be commenced by rotary transfer apparatus **110** while slide assembly **121** is still moving the rotary transfer apparatus in translational movement away from blank holding apparatus **150**.

Referring to FIGS. 8 and 14(C) in this embodiment illustrated, the clockwise rotation of engagement elements **116a** is commenced by rotary transfer apparatus **110** after slide assembly **121** has finished moving the rotary transfer apparatus and the engagement elements **116a** in translational movement away from blank holding apparatus **150**. While slide apparatus **120** remains in its extended translational position, rotation of rotary transfer apparatus **110** may move retrieved KD blank **200** into carton opening location **310**. During rotation by rotary transfer apparatus **110** of engagement elements **116a** and the KD blank **200** held by the same, between retrieval location **300** and carton opening location **310**, contact between retrieved KD blank **200** and stack **210** may be reduced, minimized or eliminated, because of the clearance space established by the longitudinal translational movement of slide assembly **121** on which rotary transfer apparatus **110** is mounted (via bracket **122**). Taken together, diagrams (C)-(F) of FIG. 14 present a schematic representation of this transition.

Referring to FIGS. 9 and 14(G), rotary transfer apparatus **110** may be configured to cease the rotation of engagement element **116a** for a very short time, while attachment elements **134** may be translated into carton opening location **310** so as to engage with a facing surface of the retrieved KD blank **200** held by engagement elements **116a**. The translation of attachment elements **134** into operation location **310** results from the movement of carton opening apparatus **130** from its retracted position to its extended position (i.e. by carriage **139** being driven by servo drive motor **138** under control of PLC **109** to cause translation along rail **136** towards carton opening location **310**).

Referring next to FIGS. 10 and 14(H), still with rotary apparatus **110** not having rotated engagement elements **116a**, carton opening apparatus **130** may return to its retracted position and attachment element **134** may disengage (i.e. by carriage **139** being driven by servo drive motor **138** under control of PLC **109** to cause translation along rail **136** away from carton opening location **310**). Prior to the release of the surface of KD blank **200** by attachment elements **134**, the vacuum on attachment elements **134** may

17

be maintained for a short time during retraction of attachment elements 134, to create a pulling force which is generally opposite to the force of engagement elements 116a, and may be considered perpendicular the engaged surface of KD blank 200, thereby at least partially erecting the KD blank 200 into carton 220.

Referring next to FIG. 11 and diagrams (I)-(K) of FIG. 14, continued rotation of engagement elements 116a by rotary transfer apparatus 110 under control of PLC 109 may thereafter bring carton 220 into release location 320.

Referring to FIG. 12 and diagram (K) of FIG. 14, hold-down apparatus 140 may move from its retracted position to an extended position to facilitate the release of carton 220 at release location 320. This may result from PLC 109 controlling servo drive motor 144 in such a manner to drive belt 146 and the corresponding carriage 145 on rail 141. Proximal ends 142d' of hold-down members 142d may be driven to a position above an upper surface of the carton 220 that has been received in carton conveyor 105 (not shown in these Figures) which may serve to stabilize carton 220 as it is released by the engagement elements 116a rotary transfer apparatus 110 as PLC 109 terminates the suction force on engagement element 116a.

Referring now to FIG. 13, hold-down apparatus 140 may be returned to its retracted position by PLC 109 operating servo drive motor 144 in such a manner to drive belt 146 and the corresponding carriage 145 on rail 141 in the opposite direction. Off-loaded carton 220 may move along a path which parallels that taken by hold-down member 142d as hold down apparatus 140 retracts. The movement of released carton 220 may be provided by conveyor 105 (FIG. 1A) and released carton 220 may continue down-stream for further processing. Rotary transfer apparatus 110 may then be operated under the control of PLC 109 to rotate to return engagement elements 116a to the retrieval location of FIGS. 6 and 14(A), and by translational movement of slide assembly 121 by the operation of servo drive motor 126 under control of PLC 109 such that slide apparatus 120 returns its retracted position and by further rotation of rotary transfer apparatus 110.

Although not shown in FIG. 14, the two sets of engagement elements members 116a and 116b—each set at 180 degrees opposite to the other—are in the embodiment of FIGS. 1 to 13 operating at the same time to process blanks—but operating 180 degrees out of phase with each other.

It may be appreciated then that between position I and position J of FIG. 14, the rotary transfer apparatus 110 may actually also move in translational movement towards and away from the blank holding apparatus to allow the opposite set of engagement elements 116b to retrieve a separate blank from the magazine, but this is not shown in FIG. 14.

Also, not shown is the movement of the hold down members 142d which would also move between positions C and E in FIG. 14, to hold down an erected carton held by the opposite set of engagement elements 116b (i.e. opposite to engagement elements 116a that would at that time be moving with the illustrated carton between the magazine and the pre-break device in FIG. 14).

It will be appreciated by those skilled in the art that changes could be made to the various aspects of the subject application described above without departing from the inventive concept thereof. It is to be understood, therefore, that this subject application is not limited to the particular aspects disclosed, but it is intended to cover modifications as defined by the appended claims.

18

When introducing elements of the present disclosure or the embodiments thereof, the articles “a,” “an,” “the,” and “said” are intended to mean that there are one or more of the elements. The terms “comprising,” “including,” and “having” are intended to be inclusive and mean that there may be additional elements other than the listed elements.

The invention claimed is:

1. An apparatus comprising:

- a blank holding apparatus operable to releasably hold a plurality of flat carton blanks in a first configuration;
- a rotary apparatus operable to rotate an engagement device along a rotational path from a first retrieval location where the engagement device is operable to engage with and retrieve a blank from the plurality of flat blanks held in said blank holding apparatus, to a second operational location; and
- a movement apparatus inter-connected to said rotary apparatus, said movement apparatus operable to move the rotary apparatus and the engagement device with said engaged blank away from the blank holding apparatus.

2. An apparatus as claimed in claim 1 wherein said movement apparatus is operable to move the rotary apparatus and the engagement device with said engaged blank in translational movement away from the blank holding apparatus.

3. An apparatus as claimed in claim 1 wherein said movement apparatus is operable to move the rotary apparatus in non-rotational movement away from the blank holding apparatus.

4. An apparatus as claimed in claim 3 wherein said movement apparatus is operable to move engagement device and a blank secured thereto in movement away from the blank holding apparatus to allow the engagement device to traverse the rotational movement path without the engaged blank contacting another component associated with the blank holding apparatus.

5. An apparatus as claimed in claim 1 wherein at the second operational location the blank is at least partially reconfigured into a second configuration.

6. An apparatus as claimed in claim 1 wherein said movement apparatus is operable to move engagement device and a blank secured thereto in translational movement away from the blank holding apparatus to allow the engagement device to traverse the rotational movement path without the engaged blank contacting the plurality of flattened tubular container blanks held in the blank holding apparatus.

7. An apparatus as claimed in claim 1 wherein said movement apparatus comprises a slide apparatus operable to provide said rotary apparatus with sliding reciprocating movement.

8. An apparatus as claimed in claim 7 wherein said slide apparatus comprises a slide assembly on which the rotary apparatus is mounted, the slide apparatus operable to translate the rotary apparatus away from the magazine to allow the engagement device to traverse the rotational path without causing the blank to contact the plurality of flattened tubular blanks.

9. An apparatus as claimed in claim 8, wherein the slide apparatus comprises a slide frame assembly, a drive shaft, a motor for driving the drive shaft, and a linkage member which connects the slide frame assembly to the drive shaft.

10. An apparatus as claimed in claim 9, wherein the slide apparatus is configured such that rotation of the drive shaft translates the slide frame assembly and the rotary member connected thereto.

11. The apparatus of claim 10, wherein said motor comprises a servo drive motor operable to drive rotation of the drive shaft.

12. An apparatus as claimed in claim 1, wherein the rotary apparatus is cantilever mounted to the movement apparatus.

13. An apparatus as claimed in claim 1, wherein the engagement device comprises at least one suction cup operable to releasably engage with a surface of a flat carton blank while held in the blank holding apparatus.

14. The apparatus of claim 1, further comprising a carton opening apparatus for at least partially erecting the container blank at the second operational location.

15. The apparatus of claim 1 wherein said rotary apparatus is operable to rotate the engagement device along a rotational cyclical path from a first retrieval location where the engagement device is operable to engage with and retrieve a blank from the plurality of blanks held in said blank holding apparatus, to a second operational location and to return to said retrieval location.

16. The apparatus of claim 1 wherein said rotary apparatus is operable to rotate the engagement device along a rotational cyclical path from a first retrieval location where the engagement device is operable to engage with and retrieve a blank from the plurality of blanks held in said blank holding apparatus, to a second operational location where said blank is at least partially opened to a third operational location where said blank is released, and to return to said retrieval location.

17. An apparatus as claimed in claim 16 wherein said apparatus further comprises a hold-down apparatus connected to said movement apparatus for movement with said movement apparatus.

18. An apparatus as claimed in claim 17 wherein the hold-down apparatus comprises a hold-down member operable for movement to engage the container at the third operational location to maintain the container in the release position during disengagement by said engagement device of said rotary apparatus.

19. An apparatus as claimed in claim 18, wherein the hold-down apparatus further comprises a hold-down rail on which the hold down member moves.

20. The apparatus of claim 19, wherein the hold-down apparatus further comprises a motor operable to drive the movement of the hold-down member.

21. An apparatus as claimed in claim 1 further comprising a controller operable to control the operation of the apparatus.

22. An apparatus as claimed in claim 1 wherein the movement apparatus is also inter-connected to a support frame, said movement apparatus operable to move the rotary apparatus and the engagement device with said engaged blank away from the blank holding apparatus relative to said support frame.

23. An apparatus as claimed in claim 1 wherein the rotary apparatus comprises a rotary shaft operable for rotation about a transverse axis, said engagement device being interconnected to said rotary shaft for rotation with said rotary shaft about said transverse axis, and said rotary apparatus is also interconnected to the engagement device; wherein the movement apparatus is operable to move the rotary apparatus, including the rotary shaft, said engagement device and said engaged blank, away from the blank holding apparatus.

24. An apparatus as claimed in claim 1 wherein the rotary apparatus has an axis of rotation and wherein the movement

of the rotary apparatus by said movement apparatus moves the axis of rotation of the rotary apparatus away from the blank holding apparatus.

25. An apparatus comprising:

5 a magazine for containing a plurality of flattened tubular container blanks;

a rotary apparatus operable to rotate an engagement device along a cyclical rotational path between an on-loading location where the engagement device engages a blank from the plurality of flattened tubular container blanks, an operation location where the blank is at least partially erected into a container, and an off-loading location where the engagement device releases the container; and

15 a slide apparatus comprising a slide assembly on which the rotary apparatus is mounted, the slide apparatus operable to translate the rotary apparatus from a first translational position where said engagement device can engage a blank, to a second translational position away from the magazine to allow the engagement device to traverse the rotational path without causing the blank to contact the plurality of flattened tubular container blanks, and then after the container is released, to translate the rotary apparatus back to the first translational position.

26. An apparatus as claimed in claim 25 wherein said rotary apparatus is mounted on said slide apparatus for sliding reciprocating movement.

27. An apparatus as claimed in claim 26, wherein the slide apparatus comprises a slide frame assembly, a drive shaft, a motor for driving the drive shaft, and a linkage member which connects the slide frame assembly to the drive shaft.

28. An apparatus as claimed in claim 27, wherein the slide apparatus is configured such that rotation of the drive shaft translates the slide frame assembly and the rotary member connected thereto.

29. The apparatus of claim 28, wherein said motor comprises a servo drive motor operable to drive rotation of the drive shaft.

30. The apparatus of claim 25, further comprising a carton opening apparatus for at least partially erecting the container blank at the operation location.

31. An apparatus as claimed in claim 25 wherein said apparatus further comprises a hold-down apparatus connected to said movement apparatus for movement with said movement apparatus.

32. An apparatus as claimed in claim 31 wherein the hold-down apparatus comprises a hold-down member operable for movement to engage the blank at the drop off location to maintain the container in the release position during disengagement by said engagement device of said rotary apparatus.

33. An apparatus as claimed in claim 32, wherein the hold-down apparatus further comprises a hold-down rail on which the hold down member moves.

34. The apparatus of claim 33, wherein the hold-down apparatus further comprises a motor operable to drive the movement of the hold-down member.

35. An apparatus as claimed in claim 25 wherein the slide apparatus is also inter-connected to a support frame, said slide apparatus operable to move the rotary apparatus and the engagement device with said engaged blank away from the magazine relative to said support frame.

36. An apparatus as claimed in claim 25 wherein the rotary apparatus comprises a rotary shaft operable for rotation about a transverse axis, said engagement device being interconnected to said rotary shaft for rotation with said

rotary shaft about said transverse axis, and said rotary apparatus is also interconnected to the engagement device;

wherein the slide apparatus is operable to move the rotary apparatus, including the rotary shaft, said engagement device and said engaged blank, away from the magazine. 5

37. An apparatus as claimed in claim 25 wherein the rotary apparatus has a transverse axis of rotation and wherein the movement of the rotary apparatus by said slide apparatus moves the axis of rotation of the rotary apparatus away from the magazine. 10

38. An apparatus as claimed in claim 25, wherein the engagement device comprises at least one suction cup operable to releasably engage with a surface of a flat carton blank while held in the blank holding apparatus. 15

* * * * *