US011897222B2

(12) **United States Patent**
Langen

(10) **Patent No.: US 11,897,222 B2**
(45) **Date of Patent: *Feb. 13, 2024**

(54) **METHOD AND APPARATUS FOR ERECTING CARTONS**

(71) Applicant: **H. J. Paul Langen**, Brampton (CA)

(72) Inventor: **H. J. Paul Langen**, Brampton (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **17/857,405**

(22) Filed: **Jul. 5, 2022**

(65) **Prior Publication Data**

US 2022/0332079 A1 Oct. 20, 2022

Related U.S. Application Data

(63) Continuation of application No. 16/677,139, filed on Nov. 7, 2019, now Pat. No. 11,390,049.

(51) **Int. Cl.**

B31B 50/07	(2017.01)
B65H 5/08	(2006.01)
B31B 50/26	(2017.01)
B31B 50/02	(2017.01)

(52) **U.S. Cl.**

CPC ***B31B 50/07*** (2017.08); ***B31B 50/022*** (2017.08); ***B31B 50/262*** (2017.08); ***B65H 5/08*** (2013.01); *B65H 2701/1764* (2013.01)

(58) **Field of Classification Search**

CPC B31B 50/02; B31B 50/022; B31B 50/04; B31B 50/06; B31B 50/07; B31B 50/26; B31B 50/262; B31B 50/48; B31B 50/60; B65B 3/02; B65B 3/025; B65B 7/26

USPC 53/458, 566; 493/313

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,434,230	A	10/1922	Richardson
1,471,924	A	10/1923	Saylor et al.
2,786,316	A	3/1957	Silva et al.
2,869,297	A	1/1959	Neer
2,879,638	A	3/1959	Hill
2,900,778	A	8/1959	Hartbauer
2,902,810	A	9/1959	McGihon
3,292,813	A	12/1966	Roegner
3,461,642	A	8/1969	Langen et al.
3,619,967	A	11/1971	Alduk
3,698,151	A	10/1972	Arneson

(Continued)

FOREIGN PATENT DOCUMENTS

CA	270065 C	11/2007
CA	2712878 C	2/2011

(Continued)

OTHER PUBLICATIONS

"Picking: A logistics centre sectored in different areas", Video available online at: https://youtu.be/9KAXH-D05XU, Mar. 31, 2017.

(Continued)

Primary Examiner — Jacob A Smith

(57) **ABSTRACT**

In erecting a carton from a knock-down carton blank, the blank is placed on a base of a bed of a shuttle such that a bottom side panel of the blank abuts the base. The bottom side panel of the blank is then gripped with a gripper of the base and a top side panel of the blank is raised while advancing the shuttle in a horizontal direction so as to open said knock-down carton blank into a carton sleeve.

23 Claims, 25 Drawing Sheets

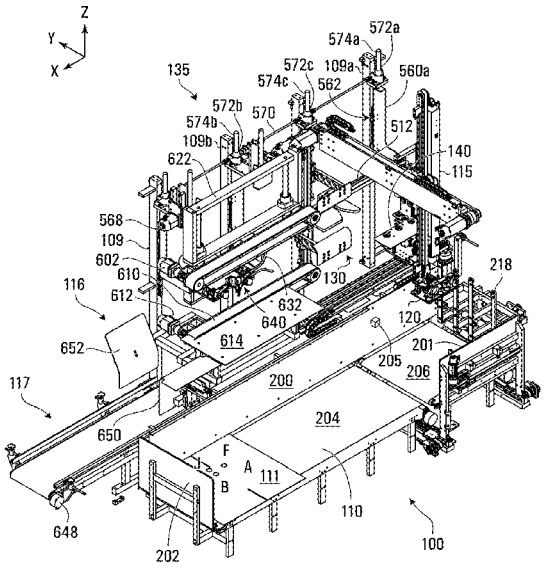

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,757,486	A	9/1973	Feurston et al.	
3,940,907	A	3/1976	Ganz	
4,010,593	A	3/1977	Graham	
4,031,817	A	6/1977	Raschke	
4,061,081	A	12/1977	Pinto et al.	
4,163,414	A	8/1979	Bachman, Jr. et al.	
4,414,789	A	11/1983	Pattarozzi	
4,553,954	A	11/1985	Sewell et al.	
4,569,182	A	2/1986	Leuvering	
4,823,539	A	4/1989	Kuckhermann et al.	
4,915,678	A	4/1990	Morita	
4,942,720	A	7/1990	Berney	
5,024,640	A	6/1991	Saitoh	
5,060,451	A	10/1991	DeMay et al.	
5,061,231	A	10/1991	Dietrich et al.	
5,105,600	A	4/1992	DePoint, Jr. et al.	
5,106,359	A	4/1992	Lott	
5,115,625	A	5/1992	Barbulesco	
5,145,070	A	9/1992	Pallett et al.	
5,207,630	A	5/1993	Decker et al.	
5,341,626	A	8/1994	Beckmann	
5,352,178	A	10/1994	Pazdernik	
5,393,291	A	2/1995	Wingerter	
5,411,464	A	5/1995	Calvert et al.	
5,440,852	A	8/1995	Lam	
5,456,570	A	10/1995	Davis et al.	
5,624,368	A	4/1997	Cromwell	
5,626,002	A	5/1997	Ford et al.	
5,720,156	A	2/1998	Bridges et al.	
5,997,458	A	12/1999	Guttinger et al.	
6,032,853	A	3/2000	Chevalier	
6,099,450	A	8/2000	Schenone et al.	
6,226,965	B1	5/2001	Lam	
6,378,725	B1	4/2002	Andersson	
6,688,075	B2	2/2004	Cristina	
6,721,762	B1	4/2004	Levine et al.	
6,764,436	B1	7/2004	Mazurek	
6,799,671	B1	10/2004	Sanchez Gomez	
6,876,958	B1	4/2005	Chowdhury et al.	
6,912,762	B2	7/2005	Lile et al.	
6,913,568	B2	7/2005	Frank et al.	
6,968,668	B1	11/2005	Dimario et al.	
7,093,408	B2	8/2006	Duperray et al.	
7,131,941	B2	11/2006	Makar et al.	
7,174,698	B2	2/2007	Spatafora et al.	
7,243,481	B2	7/2007	Draghetti	
7,326,165	B2	2/2008	Baclija et al.	
7,404,788	B2	7/2008	Monti	
7,510,517	B2	3/2009	Goodman	
7,682,122	B2	3/2010	Maynard et al.	
7,720,567	B2	5/2010	Doke et al.	
7,788,881	B2	9/2010	Johnson et al.	
7,828,708	B2	11/2010	Huang et al.	
7,832,183	B2	11/2010	Jacob et al.	
7,988,406	B2	8/2011	Schafer	
7,991,505	B2	8/2011	Lert, Jr. et al.	
8,156,013	B2	4/2012	Dearlove et al.	
8,340,812	B1	12/2012	Tian et al.	
3,365,389	A1	2/2013	Taylor	
8,622,883	B2	1/2014	Flynn	
8,671,654	B2	3/2014	Langen	
8,961,380	B2	2/2015	Langen	
9,061,477	B2	6/2015	Chandaria	
9,090,400	B2	7/2015	Wurman et al.	
9,114,897	B2	8/2015	Kim et al.	
9,126,380	B2	9/2015	Dittmer et al.	
9,315,344	B1	4/2016	Lehmann	
9,336,509	B1	5/2016	Arun Singhal et al.	
9,714,145	B1	7/2017	Lehmann	
9,718,570	B1	8/2017	Ortiz et al.	
9,796,080	B2	10/2017	Lindbo et al.	
9,927,815	B2	3/2018	Nusser et al.	
9,975,699	B2	5/2018	Yamashita	
10,074,073	B2	9/2018	Stevens et al.	
10,233,019	B2	3/2019	Lert	
10,248,112	B2	4/2019	Zhu et al.	
10,471,597	B1	11/2019	Murphy et al.	
10,489,870	B2	11/2019	Asaria et al.	
10,556,713	B2	2/2020	Langen	
10,618,736	B2	4/2020	Khodl et al.	
2003/0200111	A1	10/2003	Damji	
2004/0112520	A1	6/2004	Hanschen et al.	
2004/0148911	A1	8/2004	Hermodsson et al.	
2004/0168408	A1*	9/2004	Spatafora	B65B 43/185 53/566
2005/0079966	A1	4/2005	Moshier et al.	
2006/0096242	A1	5/2006	Makar et al.	
2006/0096712	A1	5/2006	Makar et al.	
2006/0277269	A1	12/2006	Dent et al.	
2007/0038673	A1	2/2007	Broussard et al.	
2007/0072755	A1	3/2007	Monti	
2007/0197364	A1	8/2007	Monti	
2007/0204567	A1	9/2007	Wintring et al.	
2008/0067225	A1	3/2008	Moore	
2008/0110135	A1	5/2008	Jacob et al.	
2008/0141632	A1	6/2008	Monti	
2009/0239726	A1	9/2009	Huang	
2009/0277134	A1	11/2009	Jacob et al.	
2009/0319395	A1	12/2009	Chandaria	
2010/0263333	A1*	10/2010	Langen	B65D 5/02 53/563
2011/0111939	A1	5/2011	Bassi	
2011/0297559	A1	12/2011	Davis	
2013/0218799	A1	8/2013	Lehmann et al.	
2013/0247519	A1	9/2013	Clark et al.	
2014/0260119	A1	9/2014	Baltes et al.	
2015/0072847	A1	3/2015	Graham et al.	
2015/0072848	A1	3/2015	Graham et al.	
2015/0073587	A1	3/2015	Vliet et al.	
2015/0087491	A1	3/2015	Langen	
2015/0225104	A1	8/2015	Reed	
2015/0291295	A1	10/2015	Langen	
2015/0324893	A1	11/2015	Langen	
2016/0129587	A1	5/2016	Lindbo et al.	
2016/0304281	A1	10/2016	Elazary et al.	
2018/0065807	A1	3/2018	Lert, Jr.	
2018/0086019	A1	3/2018	Langen	
2018/0126683	A1	5/2018	Johnson et al.	
2018/0150793	A1	5/2018	Lert, Jr. et al.	
2018/0327161	A1	11/2018	Helms	
2019/0152703	A1	5/2019	Sellner et al.	
2019/0160774	A1	5/2019	Langen	
2020/0039744	A1	2/2020	Lert et al.	
2020/0087010	A1	3/2020	Almogy et al.	
2020/0254707	A1	8/2020	Iwasa et al.	
2020/0406570	A1	12/2020	Hirata et al.	
2021/0016905	A1	1/2021	Lindbo et al.	
2021/0237385	A1	8/2021	Fridolfsson	

FOREIGN PATENT DOCUMENTS

CA	3023959	A1	11/2017
CA	3044850	A1	6/2018
CN	108891698	A *	11/2018
CN	108891698	A1	11/2018
DE	2250667	C3	9/1980
EP	0559604	A1	9/1993
EP	1177980	A2	2/2002
EP	3337739	B1	2/2020
GB	2 096 093	A	10/1982
WO	96/032322	A1	10/1996
WO	2013/142106	A1	9/2013
WO	2014/161644	A2	10/2014
WO	2017/081281	A	5/2017
WO	2018/197400	A1	11/2018
WO	2019/021281	A2	1/2019

OTHER PUBLICATIONS

"E-Commerce Automation at Newegg's Robotic Distribution Center", Video available online at: https://youtu.be/ZBRoXW6YtGI, Oct. 16, 2018.

(56) **References Cited**

OTHER PUBLICATIONS

"Order Fulfillment Process", Video available online at: https://youtu.be/jqaJAfmBvBM, Mar. 7, 2015.
"AutoStore | The Future of Warehousing is Reality | English", Video available online at: https://youtu.be/b3X3r5UVtEM, Jul. 29, 2015.
Non-Final Office Action dated Mar. 3, 2022, issued in connection with the U.S. Appl. No. 16/262,163.
International Search Report issued by the Canadian Intellectual Property Office dated Jun. 27, 2013 in connection with International PCT Patent Application No. PCT/CA2013/000245 filed on Mar. 15, 2013, 5 pages.
Written Opinion of the International Searching Authority issued by the Canadian Intellectual Property Office dated Jun. 27, 2013 in connection with International PCT Patent Application No. PCT/CA2013/000245 filed on Mar. 15, 2013, 6 pages.
International Preliminary Report on Patentability issued by the International Bureau of WIPO dated Oct. 28, 2014 in connection with International PCT Patent Application No. PCT/CA2013/000245 filed on Mar. 15, 2013, 7 pages.
International Search Report issued by the Canadian Intellectual Property Office dated Feb. 12, 2021 in connection with International Patent Application No. PCT/CA2020/051502, 6 pages.
Written Opinion of the International Searching Authority issued by the Canadian Intellectual Property Office dated Feb. 12, 2021 in connection with International Patent Application No. PCT/CA2020/051502, 9 pages.
International Search Report issued by the Canadian Intellectual Property Office dated Nov. 30, 2021, in connection with International Patent Application No. PCT/CA2021/051193, 4 pages.
Written Opinion of the International Searching Authority issued by the Canadian Intellectual Property Office dated Nov. 30, 2021, in connection with International Patent Application No. PCT/CA2021/051193, 5 pages.
"Witron realizes automated logistics center of E.Leclerc Socara", Video available online at: https://youtu.be/qLCSHUqhnYs, Oct. 8, 2018.
"Thomann, New logistics centre for eCommerce-giant (english)", Video available online at: https://youtu.be/NRLpIXRqs78, Jun. 27, 2017.
"Inside a Warehouse Where Thousands of Robots Pack Groceries", Video available online at: https://youtu.be/4DKrcpa8Z_E, May 9, 2018.
"Inside Alibaba's smart warehouse staffed by robots", Video available online at: https://youtu.be/FBI4Y55V2Z4, Sep. 20, 2017.
"Automated warehouse solutions for CSH | SSI Schaefer", Video available online at: https://youtu.be/xKrQQYHMT-A, Oct. 8, 2018.
"Corrugated Boxes: How It's Made Step by Step Process | Georgia-Pacific", Video available online at: https://youtu.be/C5nNUPNVWAw, Mar. 16, 2015.
"AGV Automation—Food Industry", Video available online at: https://youtu.be/dVR8Qmq1Ytl, Nov. 7, 2016.
"RCE Random Robotic Case Erector Bottom Taper", Video available online at: https://youtu.be/WEHgWYnSDmk, Oct. 10, 2017.
Non-Final Office Action dated Apr. 19, 2022, mailed in connection with the U.S. Appl. No. 16/569,298.
Notice of Allowance dated Mar. 17, 2022, mailed in connection with the U.S. Appl. No. 16/677,139.
Non-Final Office Action dated Apr. 12, 2022, mailed in connection with the U.S. Appl. No. 16/808,140.
Xpak USA, LLC, Xpak Robox™—Robotic Random-Size Box Erector Brochure, http://www.xpakusa.com/pdf/XPAK%20-%20ROBOX%20Robotic%20Case%20Erector%20Model%20XP-E3000R.pdf (last printed Mar. 22, 2016).
Random Robotics Case Erector—obtained online https://motioncontrolsrobotics.com/product/random-robotic-case-erector/.
Robotics Case Erector and Installation Archive—obtained online from https://swspackaging.com/installations/robotic-case-erector-tote-tender-32217/.
"Pick2Pallet LED Light System—Designed for Order Picking", Video available online at: https://www.youtube.com/watch?v=msSBgPByolY, Jul. 11, 2017.
"Krones: Automatic order-picking system", Video available online at: https://www.youtube.com/watch?v=yU6OwsqETzl&t=84s, Feb. 15, 2010.
"New Concepts in Robotics for Distribution", Video available online at: https://www.youtube.com/watch?v=w7shAlf2Wjs, Apr. 19, 2011.
"DB Schenker implementing next generation e-commerce", Video available online at: https://www.youtube.com/watch?v=udr0OOxmPbc, Jan. 22, 2016.
"Advanced Automation with AutoStore Warehouse Robots", Video available online at: https://www.youtube.com/watch?v=ecftHVqxRpg&t=133s, Oct. 9, 2015.
"OPRA—Order Picking Robotic AGV", Video available online at: https://www.youtube.com/watch?v=yGhmOfAbi_U, Apr. 21, 2011.
"Smart automated machine loading with Pickit and Universal robots", Video available online at: https://www.youtube.com/watch?v=9fYcaisl1qY, Jun. 10, 2016.
"Pick it 3drobotvisionmadeeasy universalrobots depalletizing pallet crates flex", Video available online at: https://www.youtube.com/watch?v =- Js1DfvBq40, Jun. 9, 2016.
"Automated Bottle Pallet Unloader with FANUC Pick & Place Robot—Clear Automation", Video available online at: https://www.youtube.com/watch?v=qwbDX58FVFM, Sep. 2, 2016.
"Warehouse Pallet Robots and Pick Station", Video available online at: https://www.youtube.com/watch?v=S4H8_oX3sOY, Mar. 12, 2019.
"Swisslog ItemPiQ: Efficient robot-based automated item picking for order fulfillment", Video available online at: https://www.youtube.com/watch?v=qMsgnTq6C_s, Feb. 22, 2019.
"Solutech robot pallet picking", Video available online at: https://www.youtube.com/watch?v=rUrll1u64Qc, Mar. 26, 2015.
"Robotic order picking from pallets and flowracks by Robomotive", Video available online at: https://www.youtube.com/watch?v=O7641Lfo81c, Sep. 18, 2018.
"Full Layer Glass Bottle and Case Palletizer / Depalletizer", Video available online at: https://www.youtube.com/watch?v=PGajWaQ9jNg&t=75s, Dec. 17, 2013.
"Pack, Seal & Palletize—Garbage Bag Rolls", Video available online at: https://www.youtube.com/watch?v=qFHUX6bqXcg, Sep. 24, 2019.
"Robotic Palletizing Cell with Accumulation—HSC & RSC Cases", Video available online at: https://www.youtube.com/watch?v=mF0yF5hTrZ8, Dec. 18, 2019.
"VPick™ Robot Guidance for Mixed Case Depalletizing", Video available online at: https://www.youtube.com/watch?v=z-FbC2CMmus&t=60s, Apr. 19, 2019.
"AQFlex® XS: advanced performance and unique agility in a compact design", Video available online at: https://www.youtube.com/watch?v=prxl8DnJjTw, May 5, 2017.
"Intralox ARB Technology, Enabling Rapid Depalletizing (6 of 6)", Video available online at: https://www.youtube.com/watch?v=1kdMZCxiElc, Dec. 9, 2011.
"Depalletizing Robot | Autotec Solutions", Video available online at: https://www.youtube.com/watch?v=8yOsG4t41Hc, Jul. 17, 2018.
"Autotec Solutions", Video available online at: https://www.youtube.com/channel/UCEtJjzx-G7nGvYgKqB4yitg, Jun. 27, 2018.
"Intralox ARB Depalletizing Systems", Video available online at: https://www.youtube.com/watch?v=YIRbmxGlzj4, Mar. 31, 2014.
"Combi RCE Robotic Random Case Erector installed by SWS Packaging", Video available online at: https://youtu.be/9-W9gfCtZhE, Aug. 13, 2017.
"Palletizing and Depalletizing | Honeywell Intelligrated", Video available online at: https://www.youtube.com/watch?v=8nFn6xnnTbc&t=83s, Oct. 4, 2018.
"The Magic Bus: A fully automated can depalletizer with pallet management", Video available online at: https://www.youtube.com/watch?v=y073yPWZSx0&t=258s, Apr. 9, 2020.
"Dual Case Robotic Palletizing System with Corner Board Stretch Wrapper—Kaufman Engineered Systems", Video available online at: https://www.youtube.com/watch?v=h4tyZt2seVE, May 12, 2017.

(56) **References Cited**

OTHER PUBLICATIONS

"Automated Depalletizing System Uses FANUC Robots for Complex Depalletizing—PASCO", Video available online at: https://www.youtube.com/watch?v=VVz3xNIJYAk, Jan. 16, 2015.
"Automated Pallet Jack Order Selection.wmv", Video available online at: https://www.youtube.com/watch?v=g _-V31UL4Ww&t=98s, Mar. 5, 2010.
"System Logistics APPS: Automatic Pick to Pallet System", Video available online at: https://www.youtube.com/watch?v=v5bPGIgENP8, Oct. 15, 2013.
"A look inside one of Amazon's robotic fulfillment centers", Video available online at: https://youtu.be/YL9XjyXsKKk, Jan. 2, 2019.
"Poly bagmaker inserter FLEXIM-31", Video available online at: https://youtu.be/D88VRdm68mk, Mar. 20, 2017.
"Automatic Horizontal Baler / Baling Press Machine (HBA150-110130)", Video available online at: https://youtu.be/vLbAbSLBSyY, Jun. 28, 2018.
"Inside Amazon's Fulfillment Center in Kent, Washington", Video available online at: https://youtu.be/Zm0toTbg8J4, May 31, 2018.
"The Grand Theory of Amazon", Video available online at: https://youtu.be/UyohSu-Ft_U, Jun. 2, 2018.
"How Amazon Receives Your Inventory", Video available online at: https://youtu.be/dAXdeqcHBp4, Dec. 23, 2013.
"Inside an Amazon Warehouse on Cyber Monday", Video available online at: https://youtu.be/qRQwkJLRfWw, Nov. 28, 2016.
"Inside Edition Producer Goes Undercover to Deliver Amazon Packages", Video available online at: https://youtu.be/YzdEQJ9V-8M, Nov. 20, 2018.
"I went undercover as an Amazon delivery driver. Here's what I learned about the hidden costs of free shipping", Title retrieved at: https://www.thestar.com/news/investigations/2019/12/19/i-went-undercover-as-an-amazon-delivery-driver-heres-what-i-learned-about-the-hidden-costs-of-free-shipping.html, Dec. 19, 2019.
"Automated Decasing System Uses Six FANUC Robots to Decase Bottles—StrongPoint Automat", Video available online at: https://youtu.be/bTkz4RYkevQ, May 20, 2016.
"Automated labeling and palletizing, courtesy of StrongPoint Automation", Video available online at: https://youtu.be/X6ukaEe_vOM, Jan. 24, 2020.
"New Concepts in Robotics for Distribution", Video available online at: https://youtu.be/w7shAlf2Wjs, Apr. 19, 2011.
"Fruits Picking with FANUC", Video available online at: https://youtu.be/Xq2yTJs8NXI, Jun. 30, 2019.
"The Warehouse of the Future—WITRON's OPM Technology at Meijer in Wisconsin", Video available online at: https://youtu.be/bn5jjVKhFUs, Mar. 29, 2017.
Non-Final Office Action dated Aug. 17, 2021, mailed in connection with the U.S. Appl. No. 16/677,139.
Notice of Allowance mailed by the USPTO dated May 25, 2021, in the related U.S. Appl. No. 16/444,673.
International Search Report issued by the Canadian Intellectual Property Office dated Aug. 8, 2013, in connection with International PCT Patent Application No. PCT/CA2013/000230, 5 pages.
Written Opinion of the International Searching Authority issued by the Canadian Intellectual Property Office dated Aug. 8, 2013, in connection with International PCT Patent Application No. PCT/CA2013/000230, 8 pages.
International Preliminary Report on Patentability issued by the Canadian Intellectual Property Office dated May 26, 2015, In connection with International PCT Patent Application No. PCT/CA2013/000230, 9 pages.
Non-Final Office Action dated Apr. 10, 2023, mailed in the related U.S. Appl. No. 17/459,936.
Non-Final Office Action dated Mar. 26, 2018, mailed in the related U.S. Appl. No. 14/646,321.

* cited by examiner

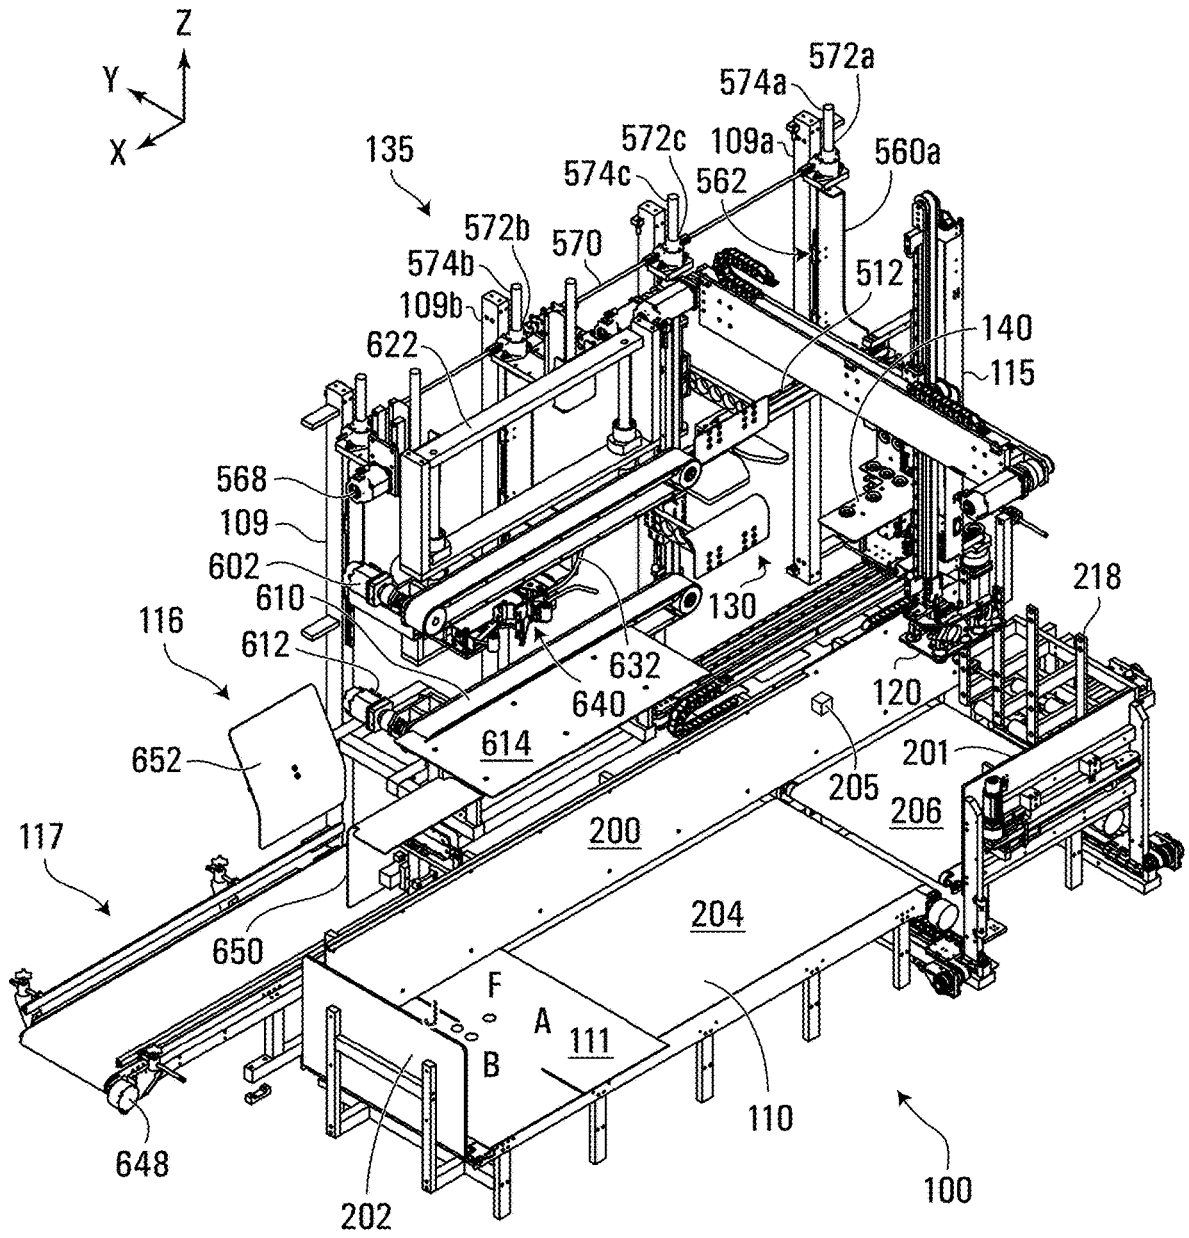
Z
Y
X
135
572a
574a
572c
109a
560a
574c
562
572b
570
574b
512
109b
140
622
115
568
109
602
610
130
218
116
612
632
640
120
652
614
201
205
206
117
200
204
650
F
A
111
B
110
648
202
100

FIG. 1

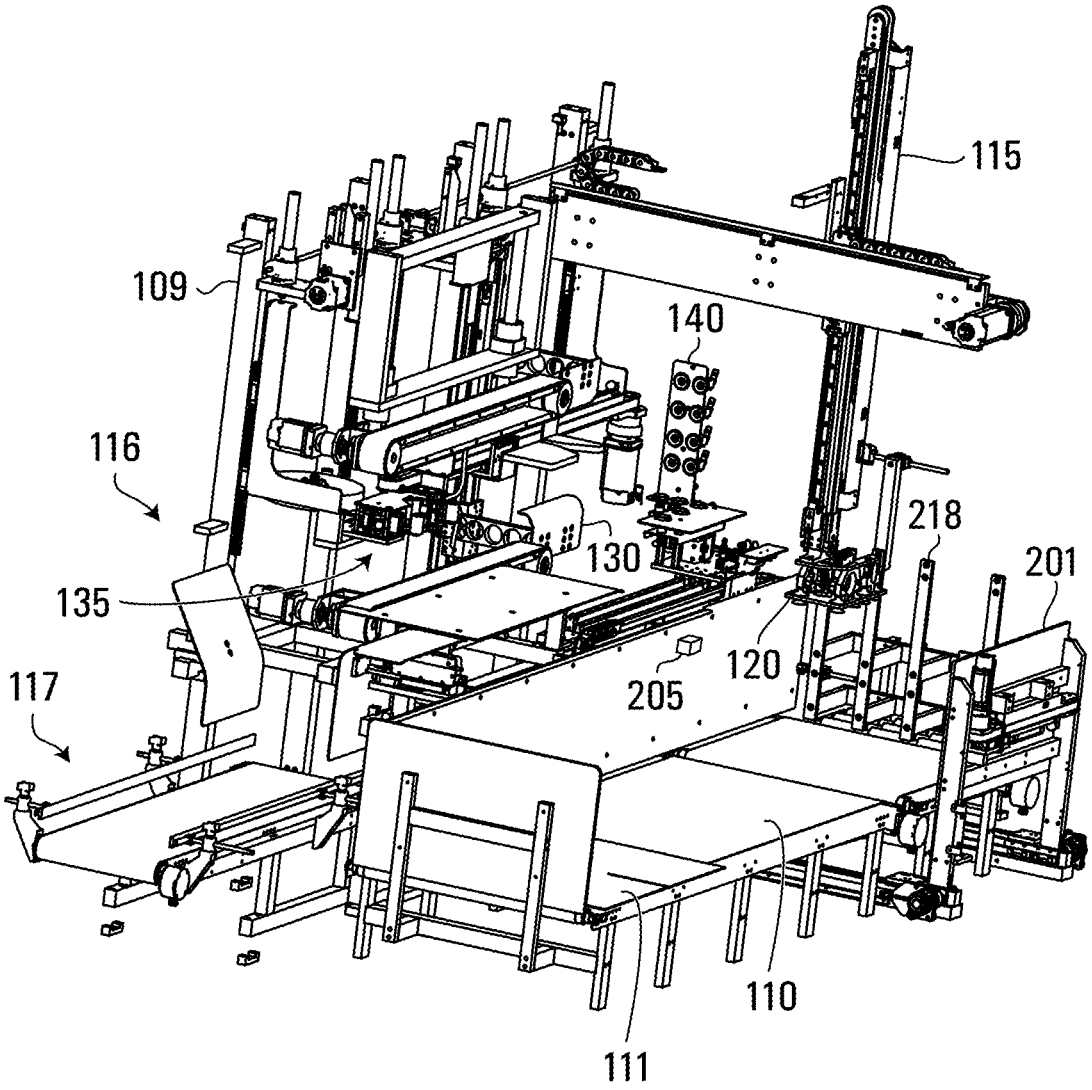

FIG. 2

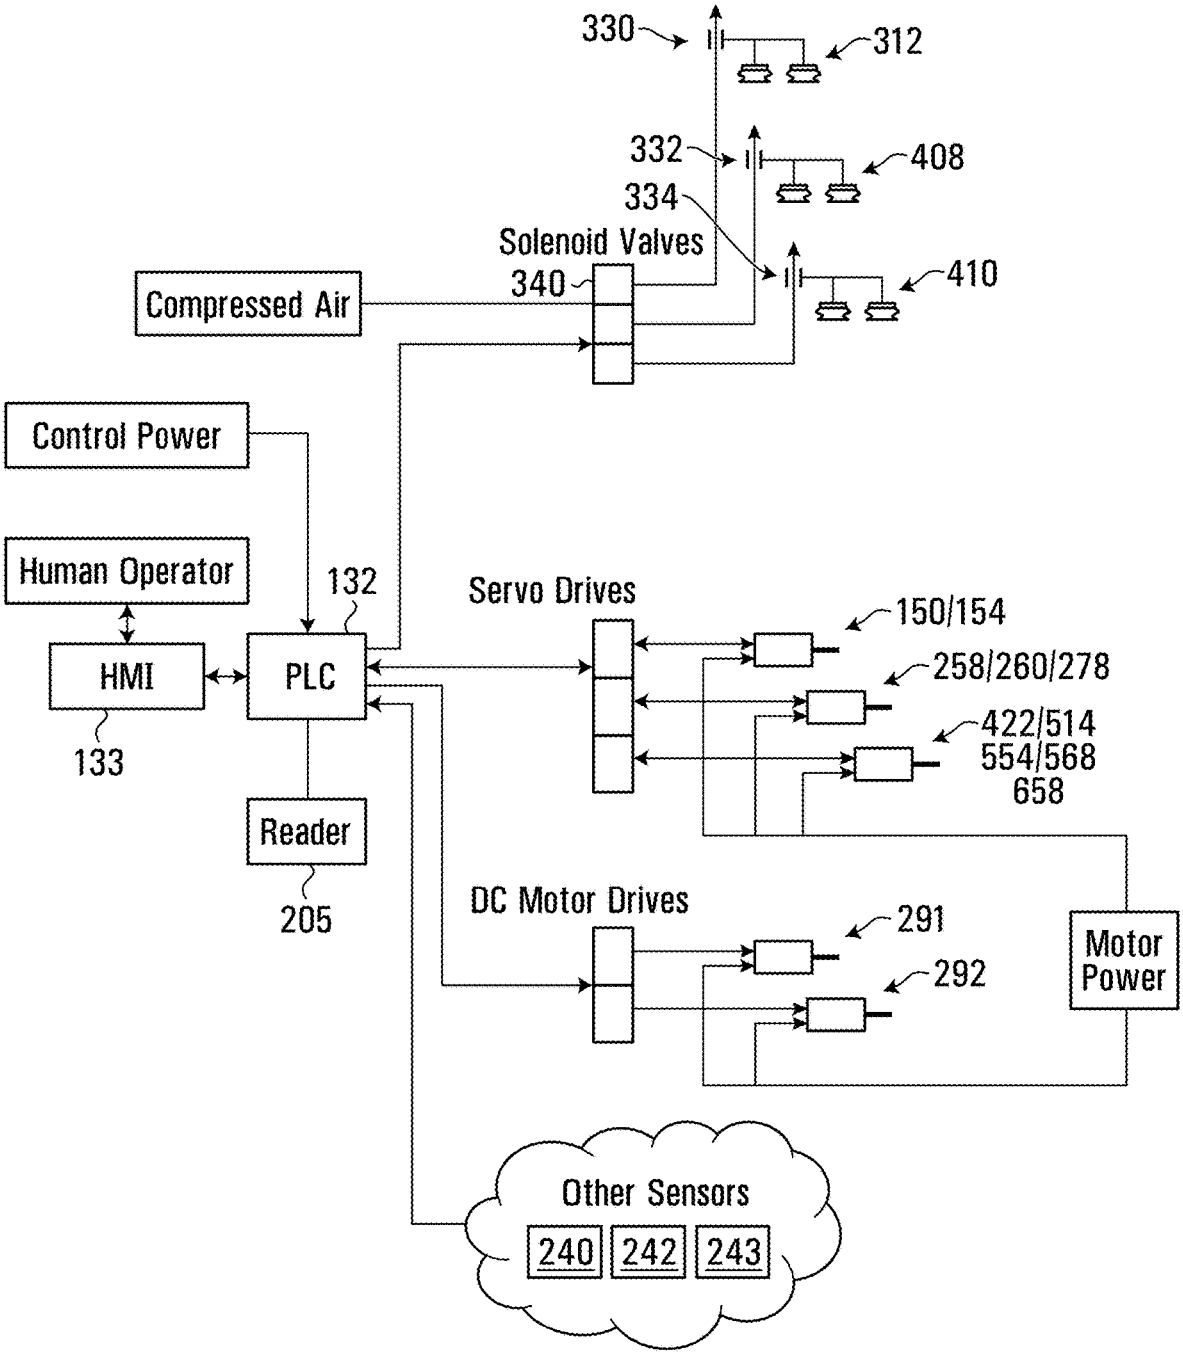
330
312
332
408
334
Solenoid Valves
340
410
Compressed Air
Control Power
Human Operator
132
Servo Drives
150/154
HMI
PLC
258/260/278
422/514
554/568
658
133
Reader
205
DC Motor Drives
291
292
Motor Power
Other Sensors
240
242
243

FIG. 3

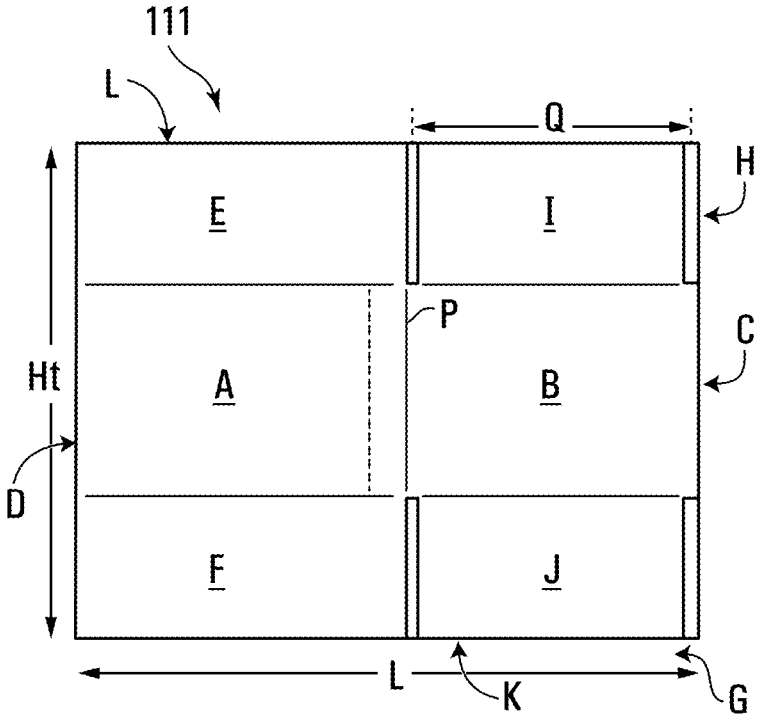

FIG. 4A

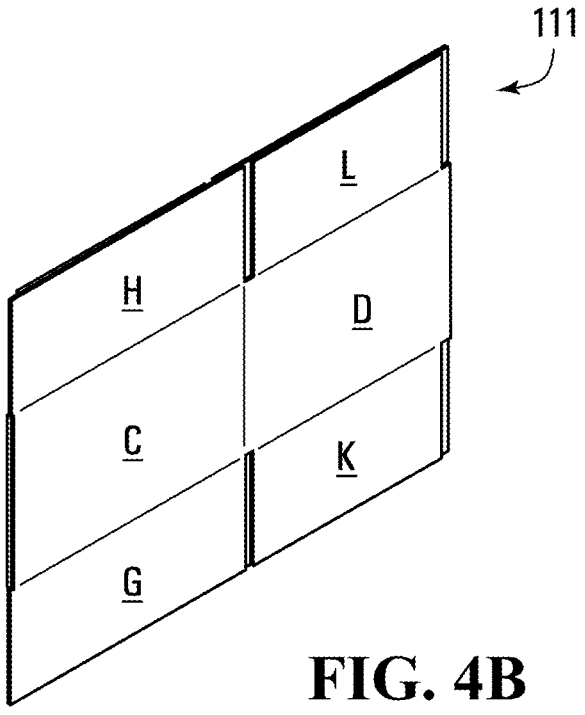

FIG. 4B

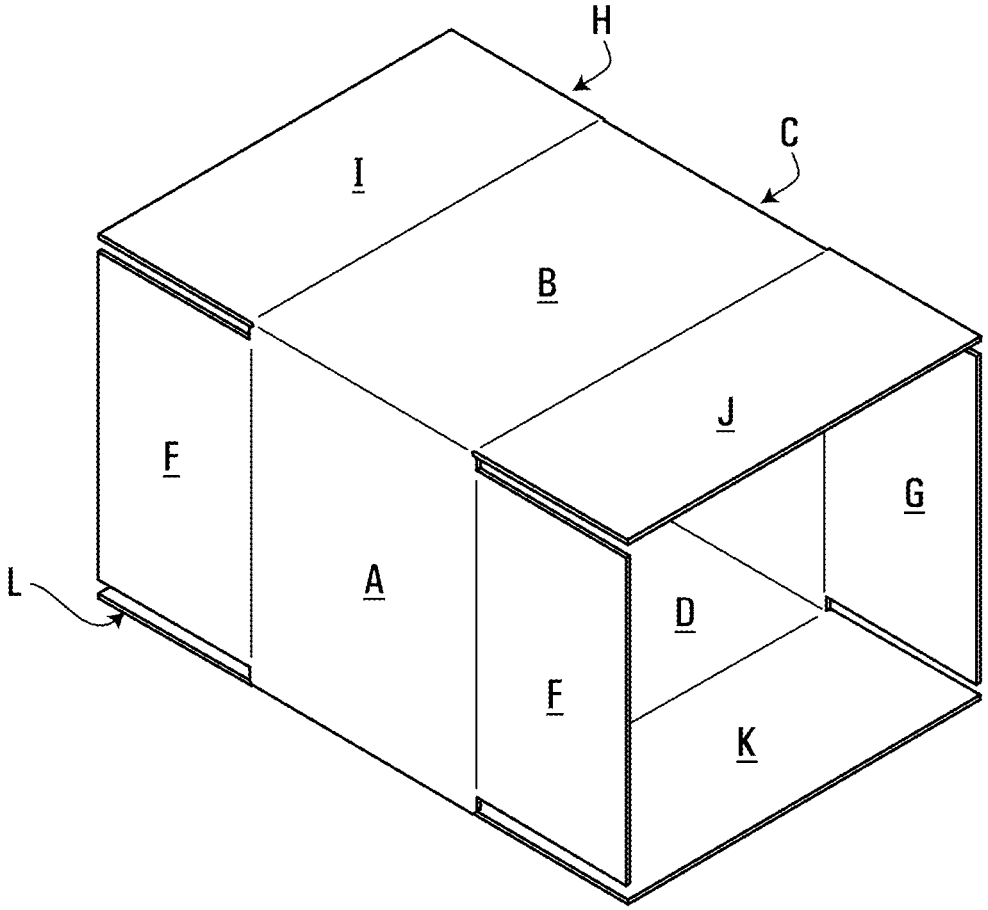

FIG. 5

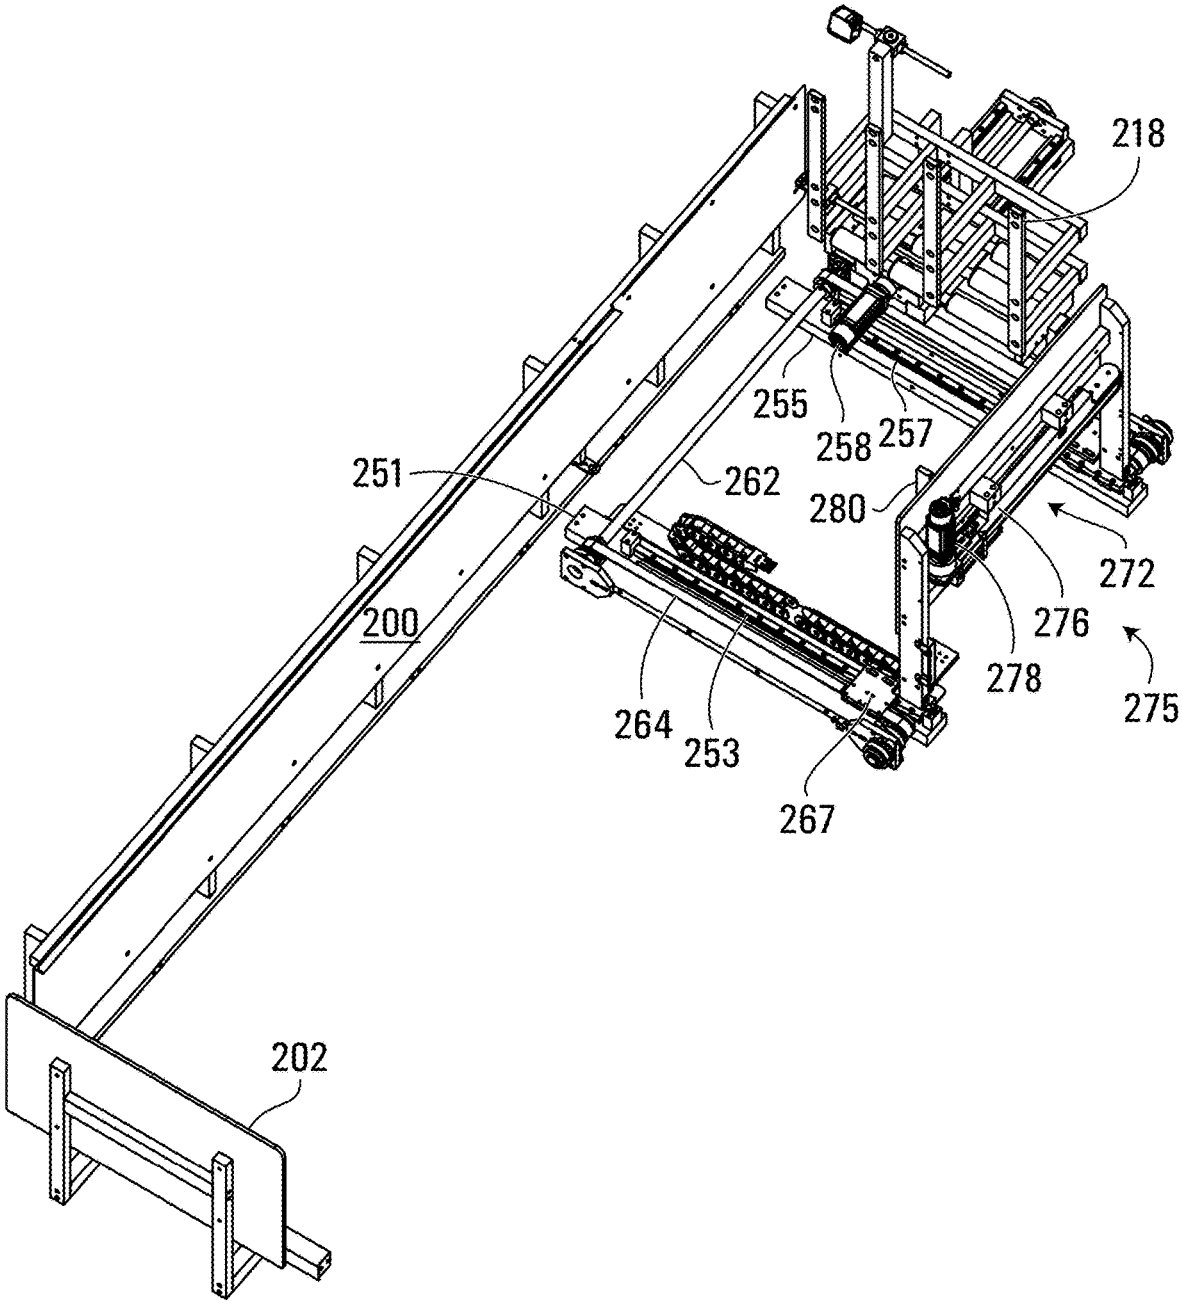

FIG. 6

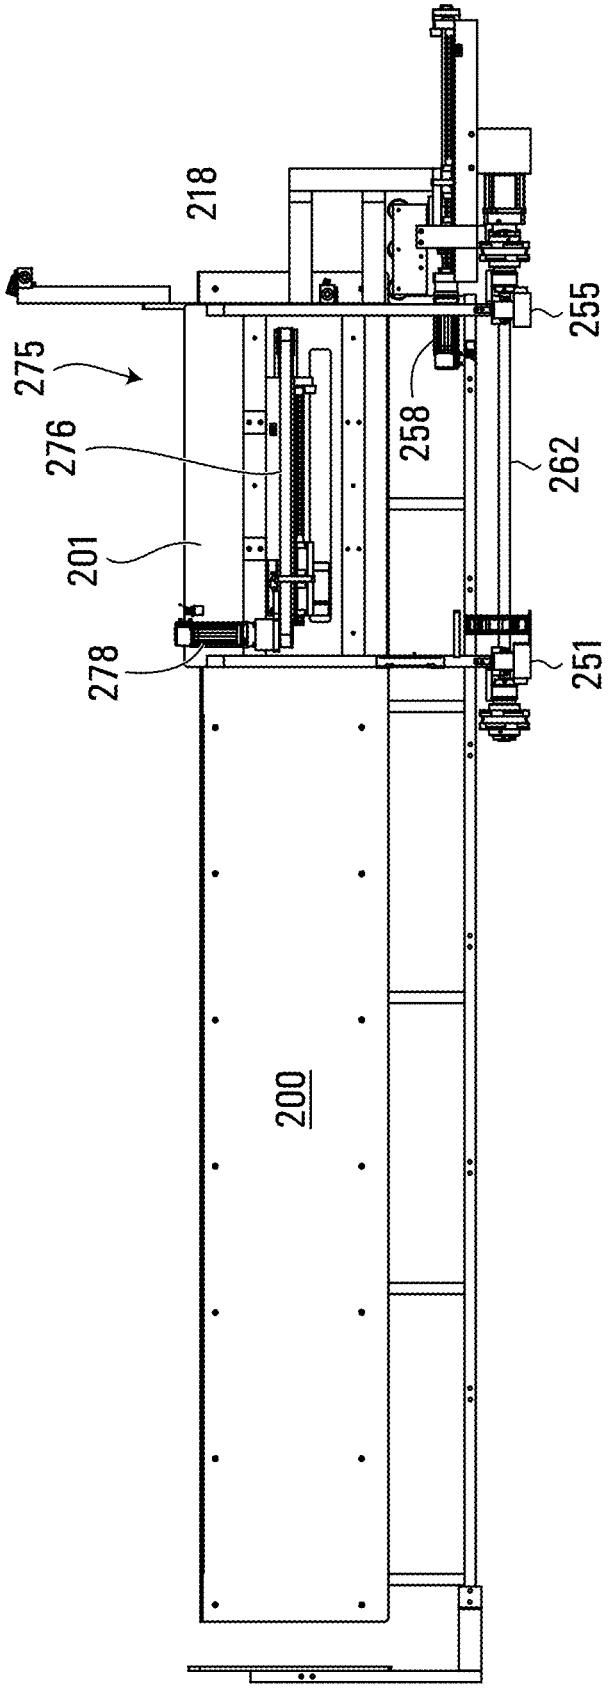

FIG. 7

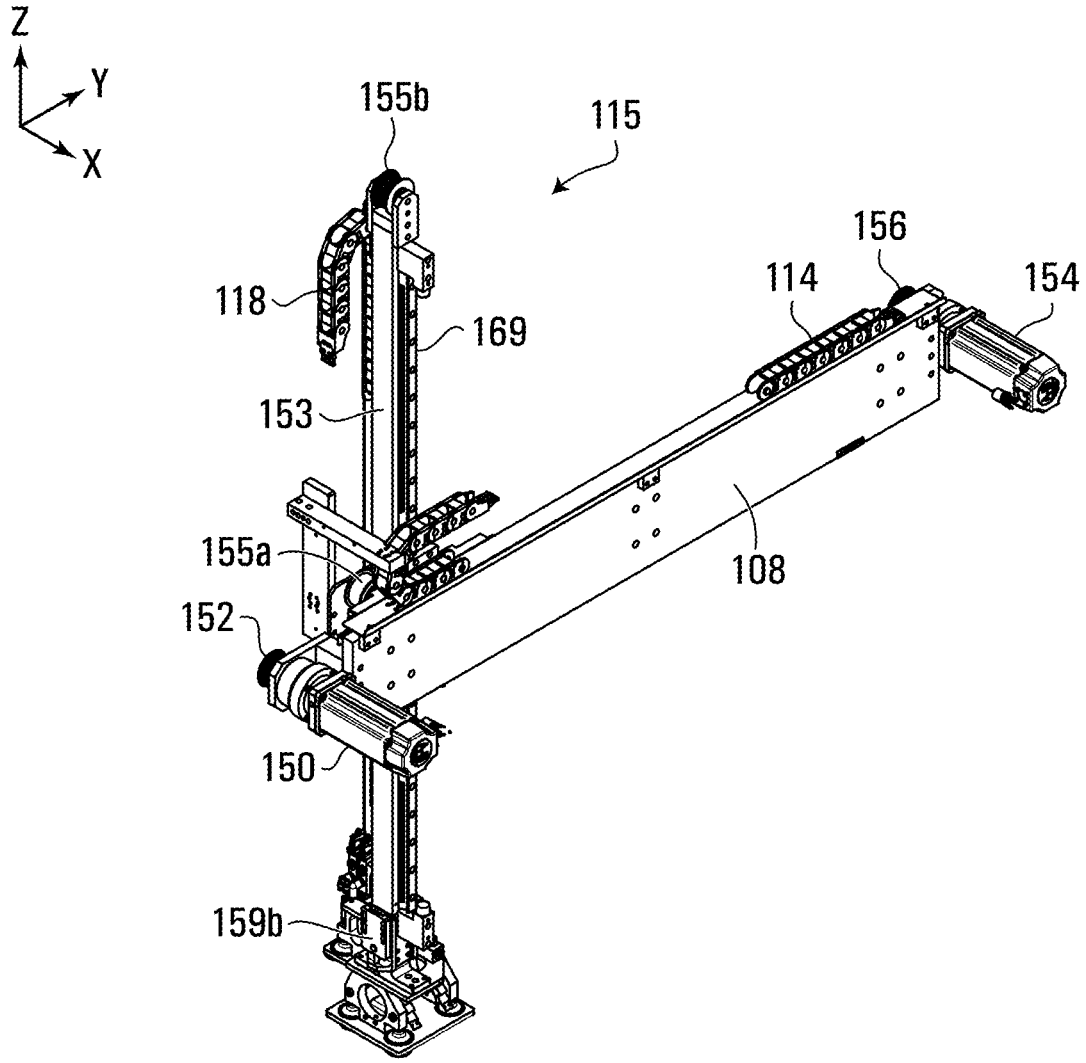

FIG. 8

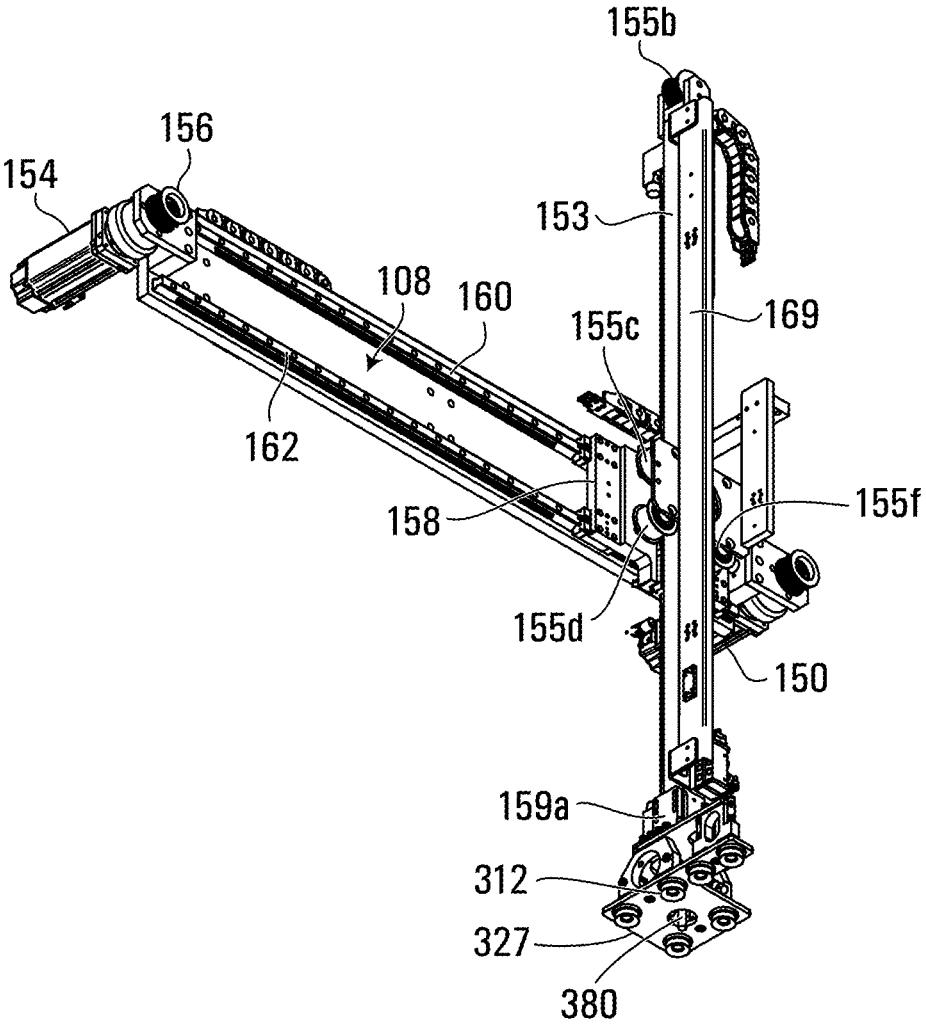
155b
156
154
153
108
160
155c
169
162
158
155f
155d
150
159a
312
327
380

FIG. 9

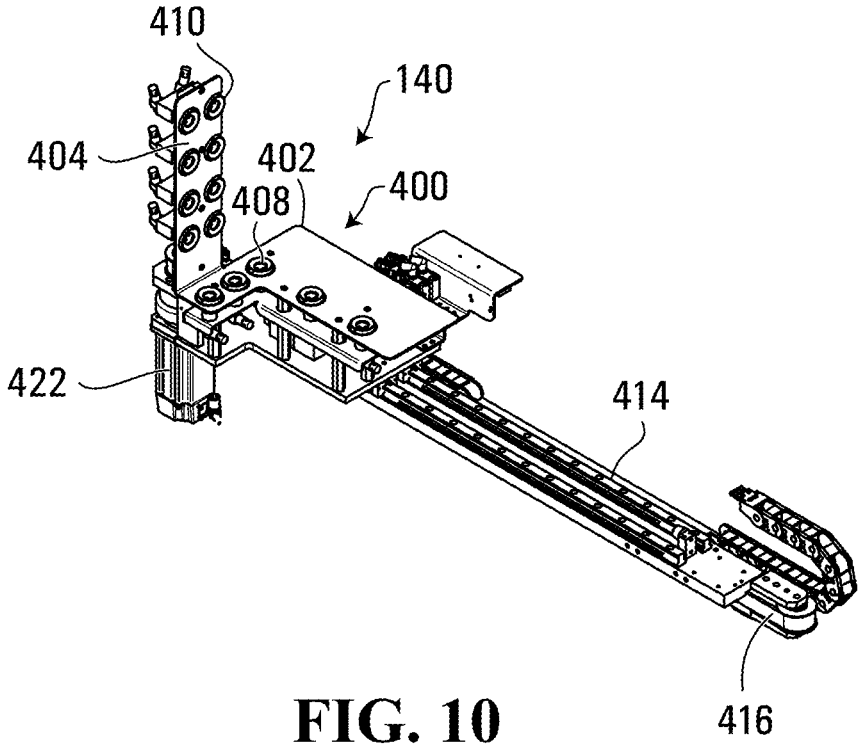
410
140
404
402
400
408
422
414
416

FIG. 10

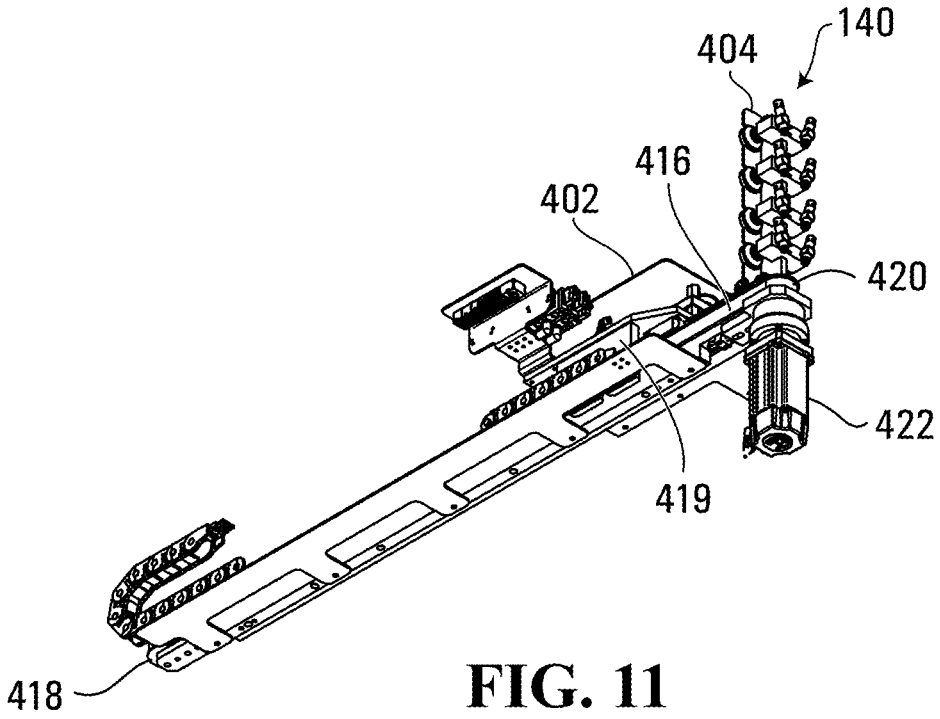
140
404
416
402
420
422
419
418

FIG. 11

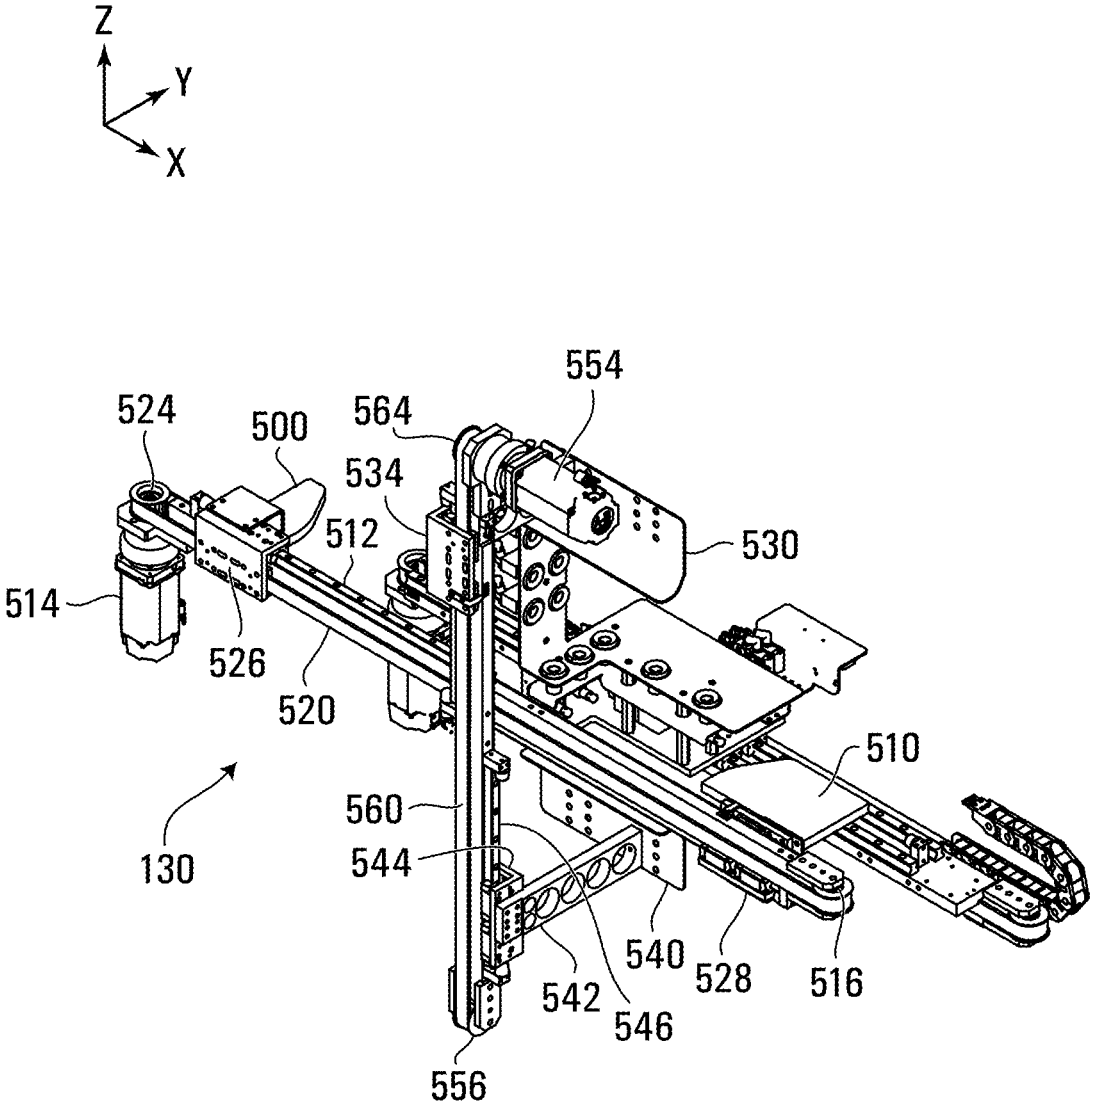
Z
Y
X
554
524
564
500
534
512
530
514
526
520
510
560
130
544
540
528
516
542
546
556

FIG. 12

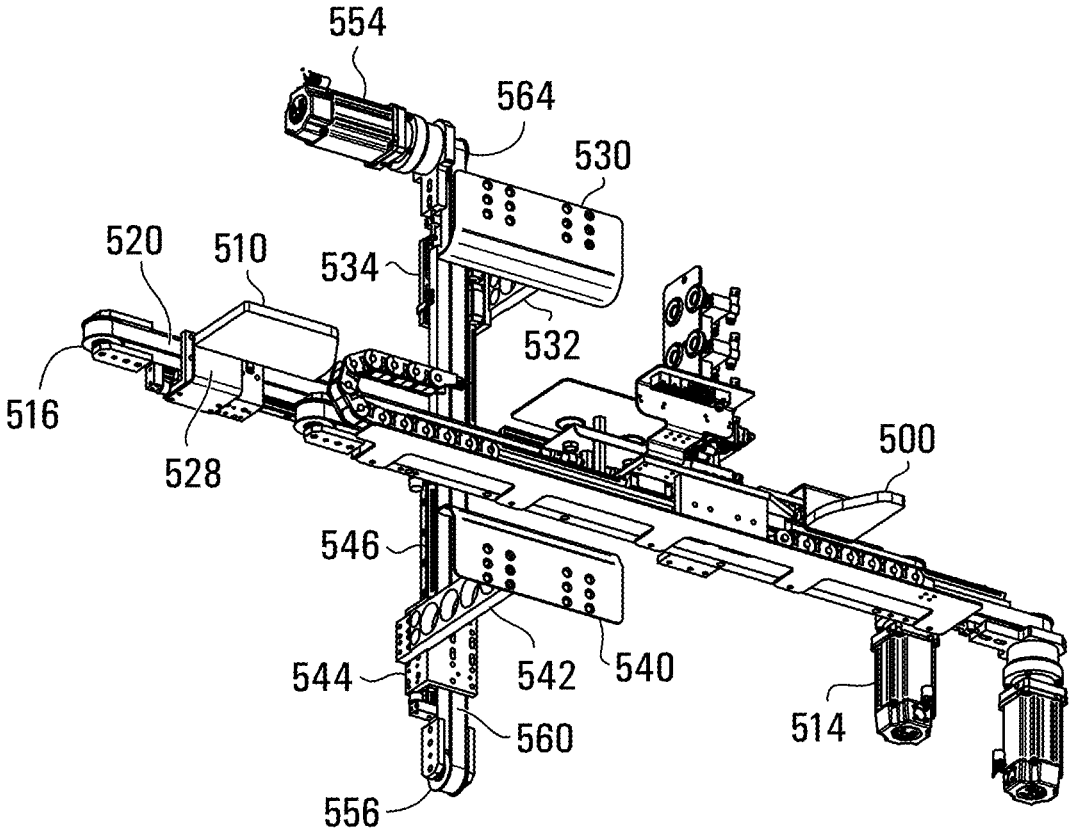
554
564
530
520
510
534
532
516
528
500
546
544
542
540
514
560
556

FIG. 13

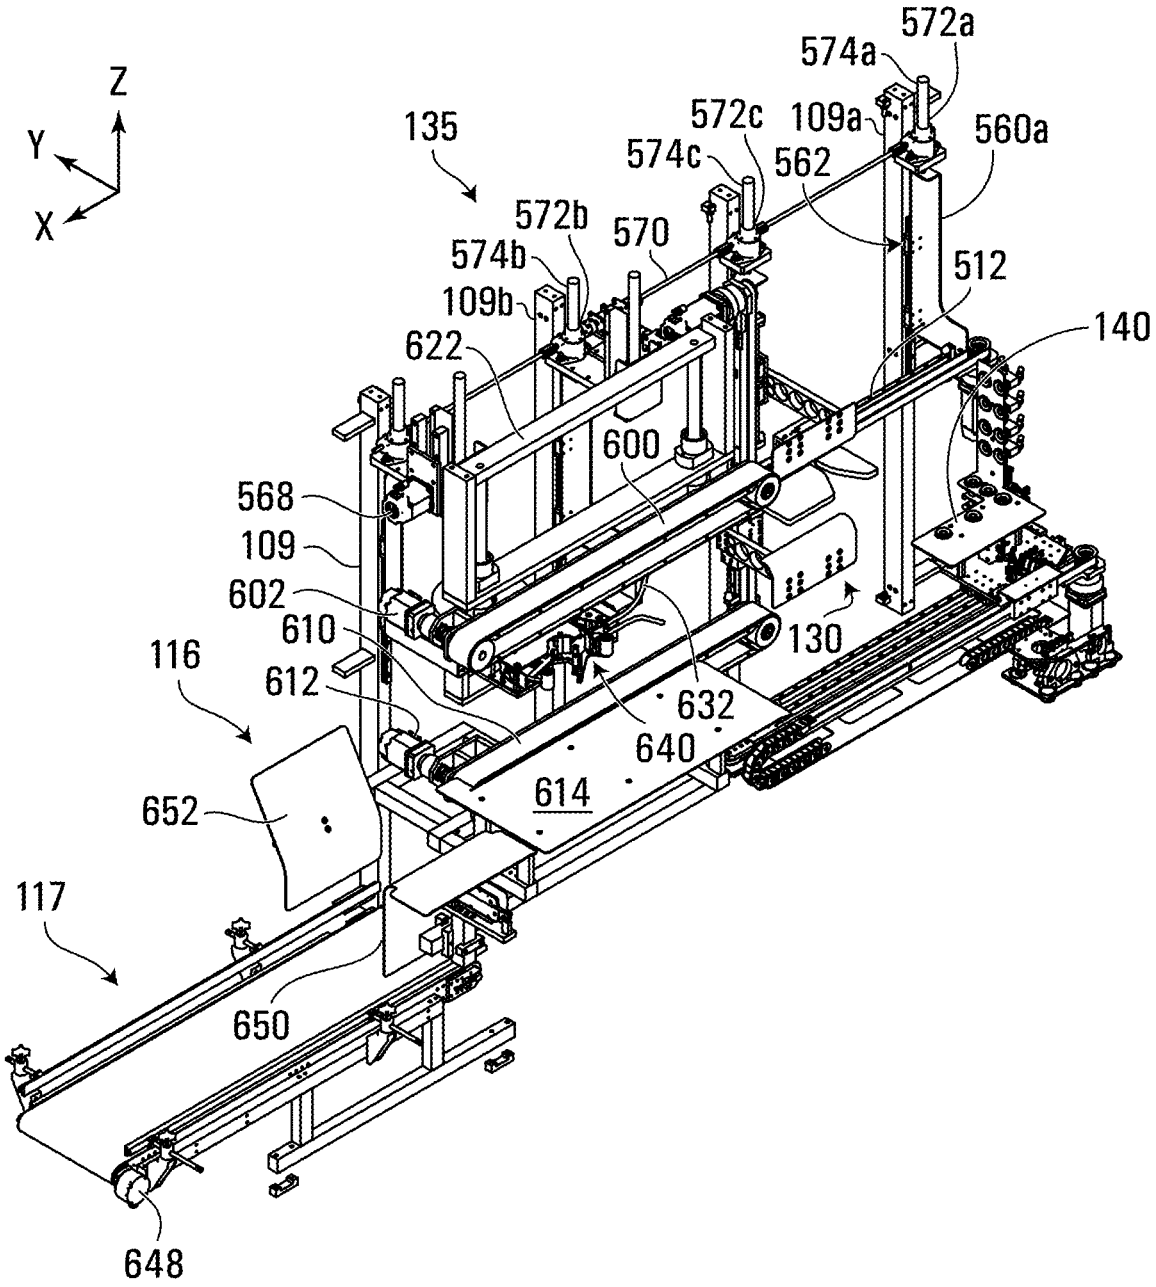
Z
Y
X
135
572a
574a
572c
109a
560a
574c
562
572b
570
574b
512
109b
140
622
600
568
109
602
610
130
116
612
632
640
614
652
117
650
648

FIG. 14

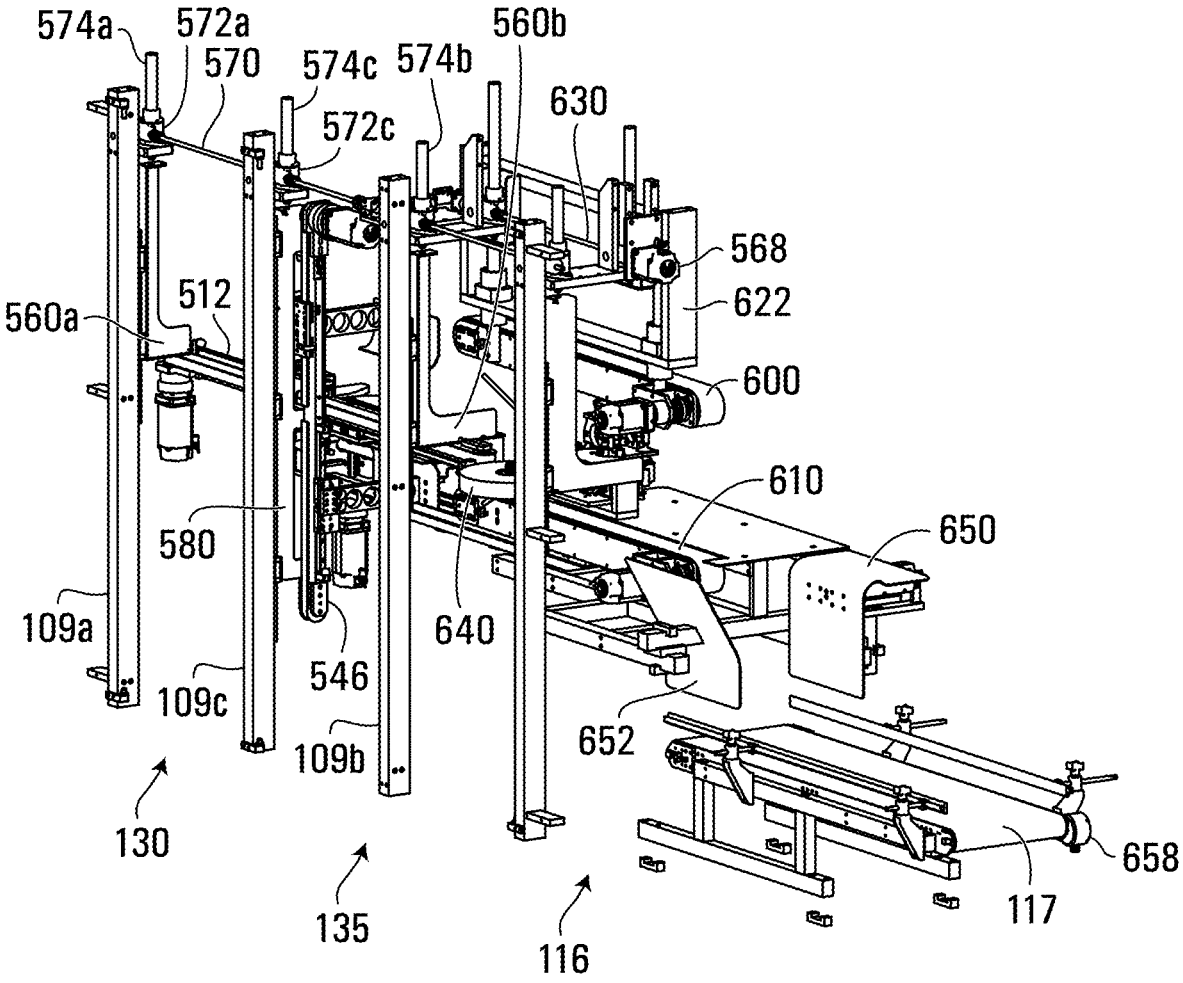
574a
572a
570
574c
574b
560b
630
572c
568
622
512
560a
600
610
650
580
640
109a
546
109c
652
109b
130
135
116
117
658

FIG. 15

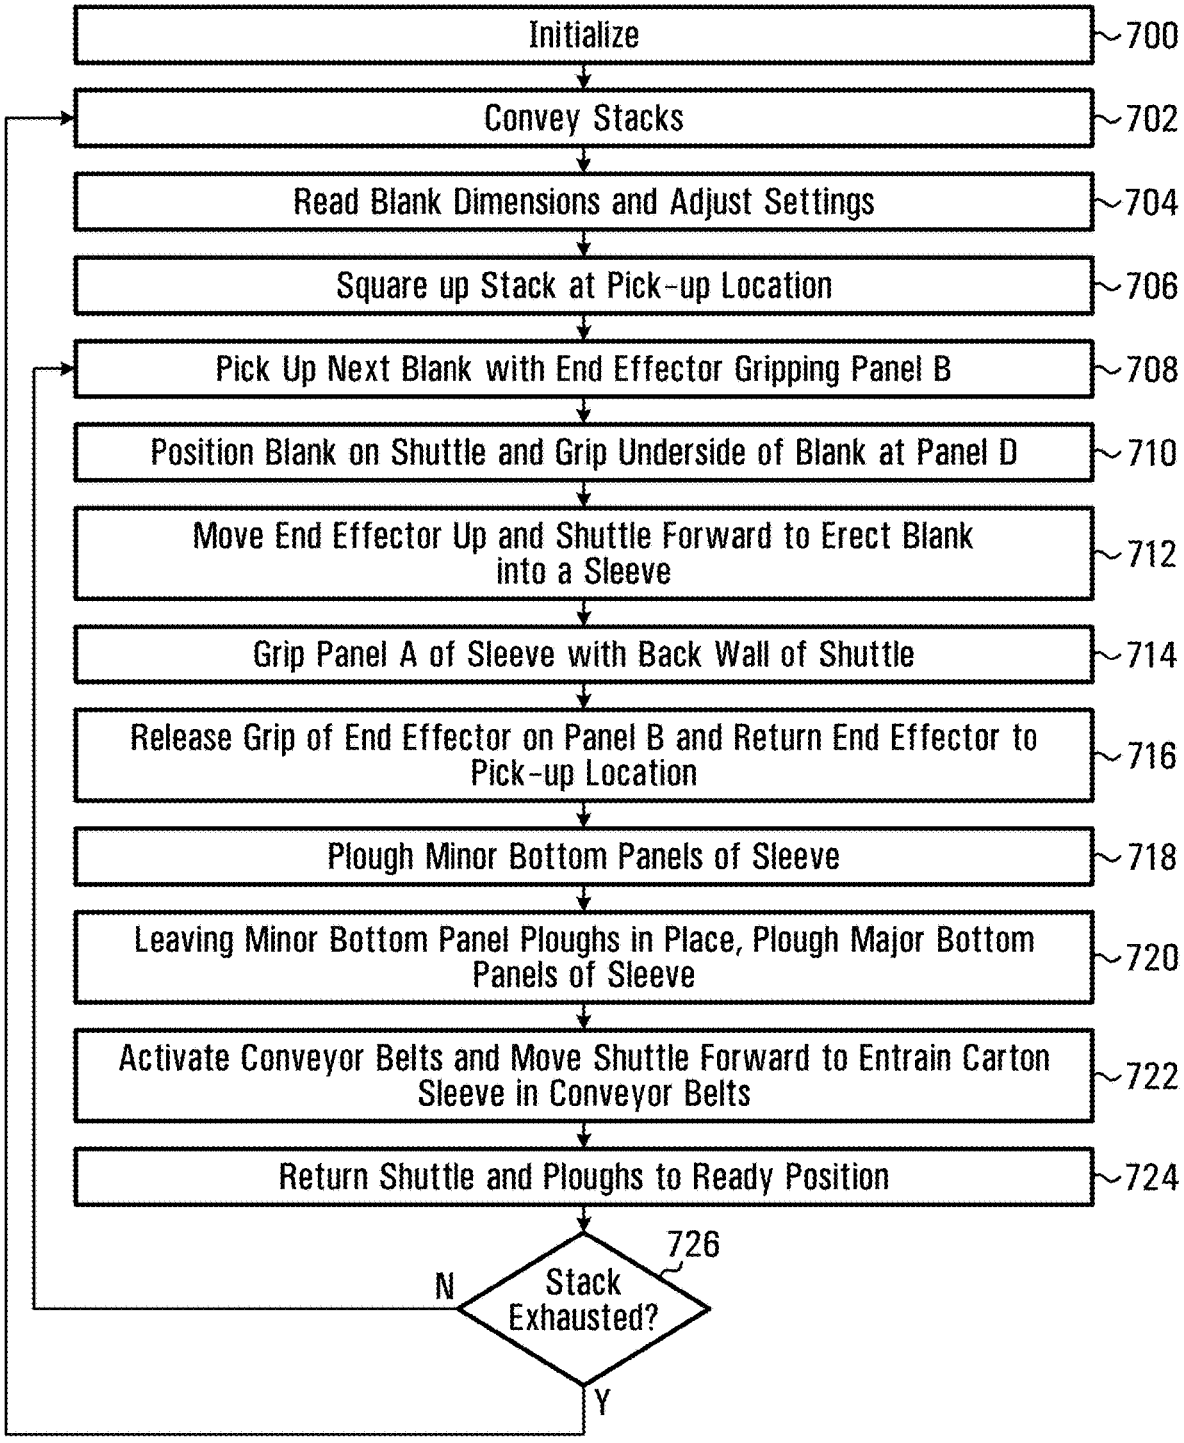
Initialize
700
Convey Stacks
702
Read Blank Dimensions and Adjust Settings
704
Square up Stack at Pick-up Location
706
Pick Up Next Blank with End Effector Gripping Panel B
708
Position Blank on Shuttle and Grip Underside of Blank at Panel D
710
Move End Effector Up and Shuttle Forward to Erect Blank into a Sleeve
712
Grip Panel A of Sleeve with Back Wall of Shuttle
714
Release Grip of End Effector on Panel B and Return End Effector to Pick-up Location
716
Plough Minor Bottom Panels of Sleeve
718
Leaving Minor Bottom Panel Ploughs in Place, Plough Major Bottom Panels of Sleeve
720
Activate Conveyor Belts and Move Shuttle Forward to Entrain Carton Sleeve in Conveyor Belts
722
Return Shuttle and Ploughs to Ready Position
724
Stack Exhausted?
726
N
Y

FIG. 16

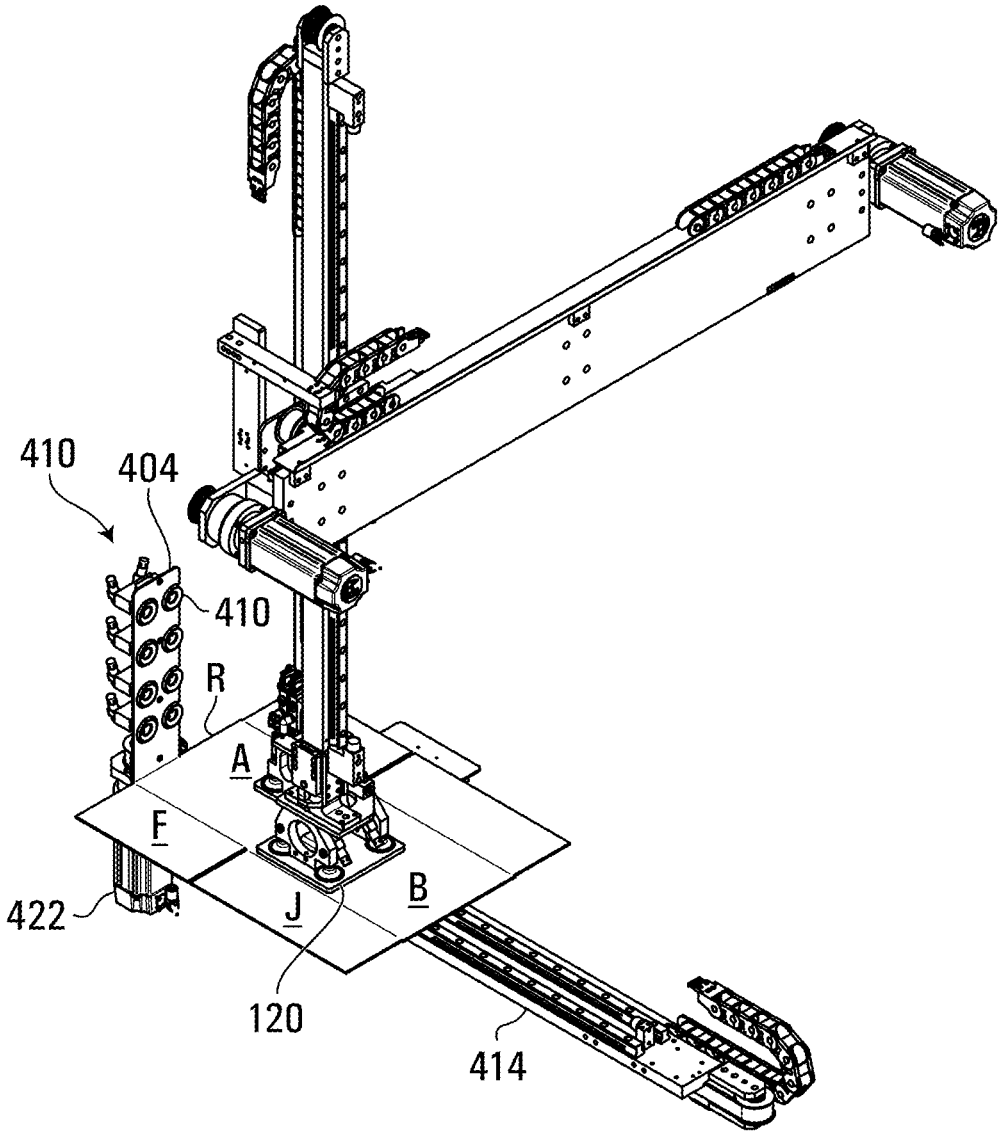

FIG. 17

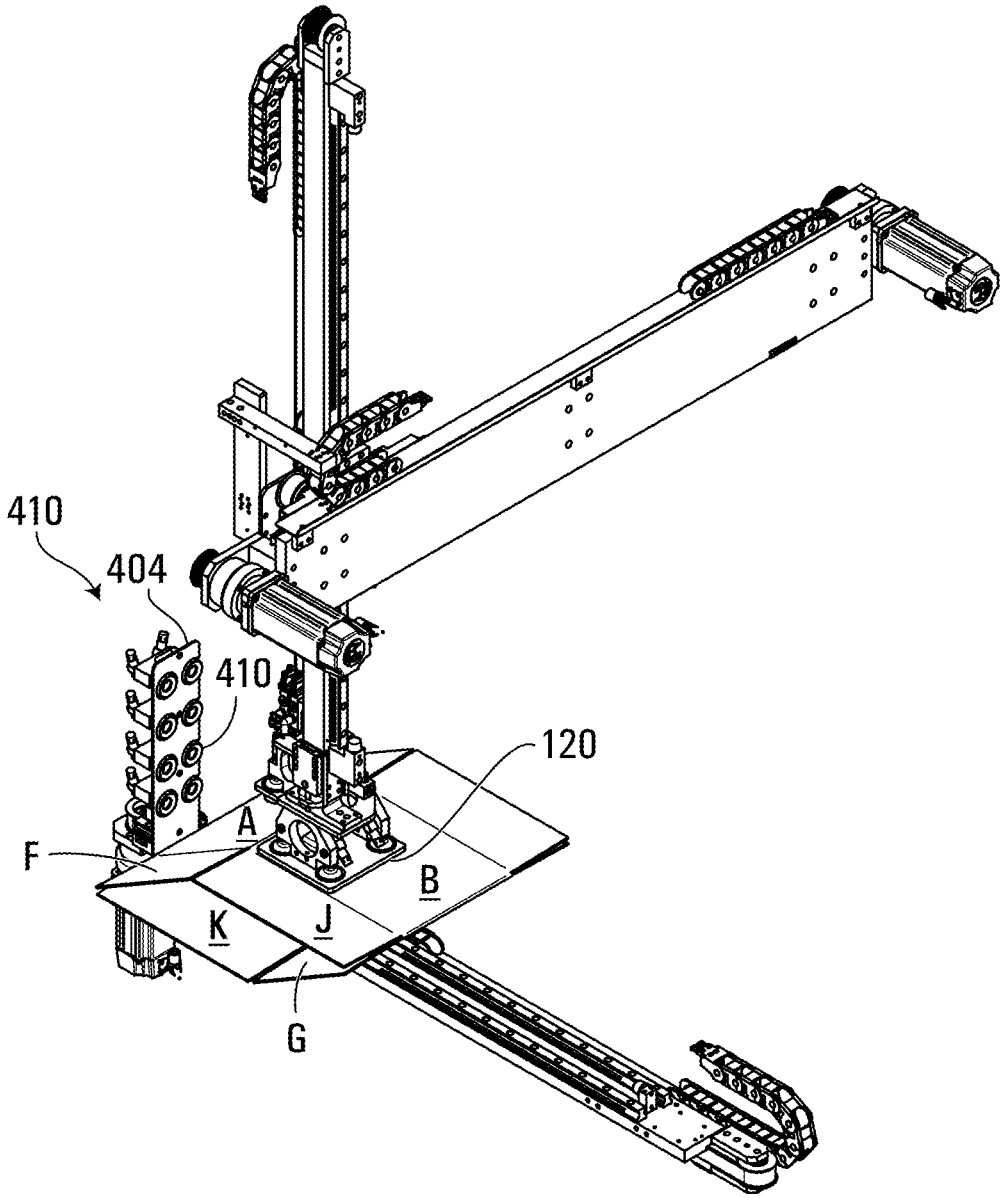

FIG. 18

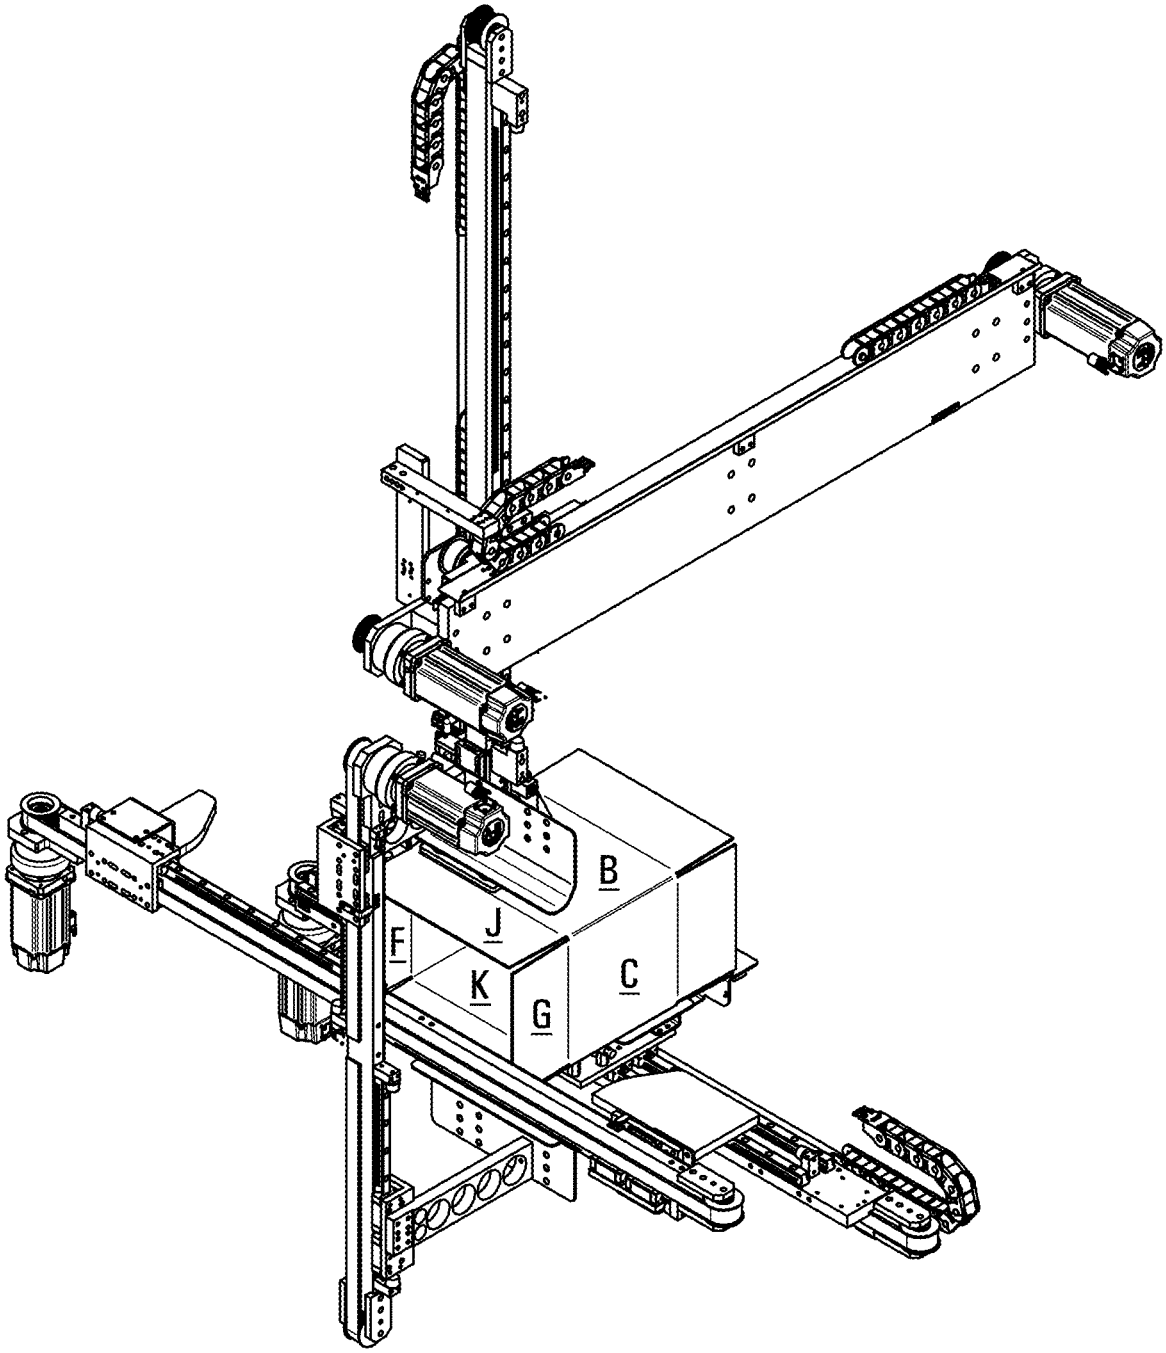

FIG. 19

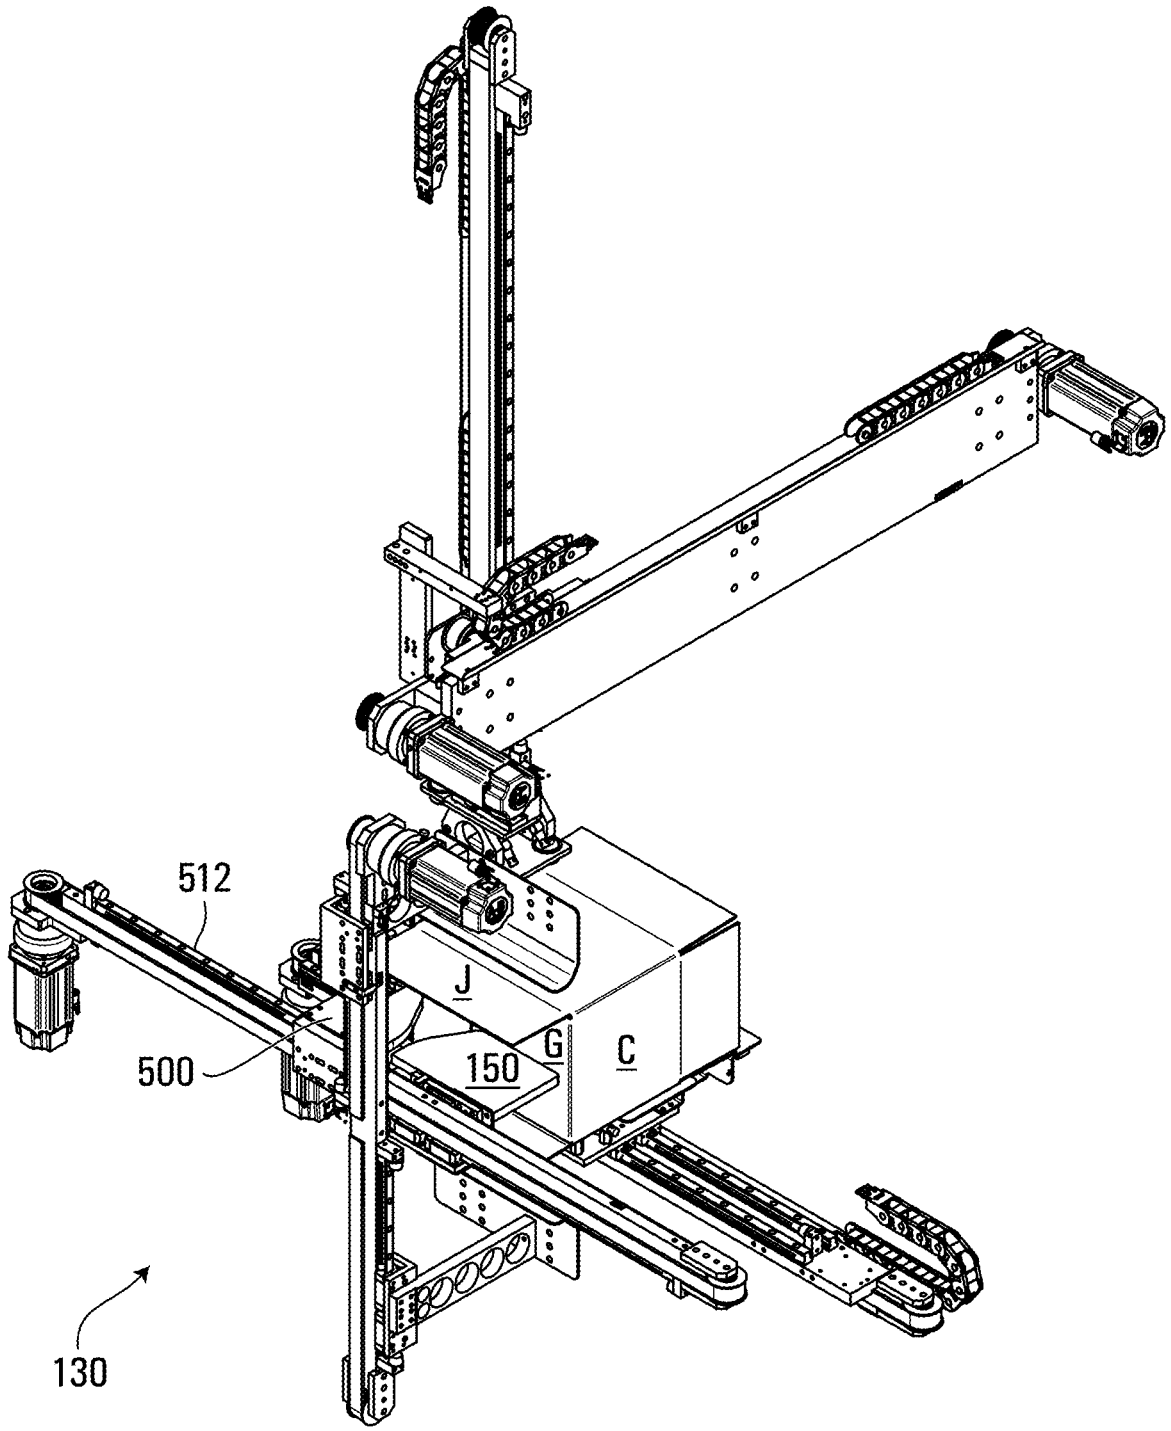

FIG. 20

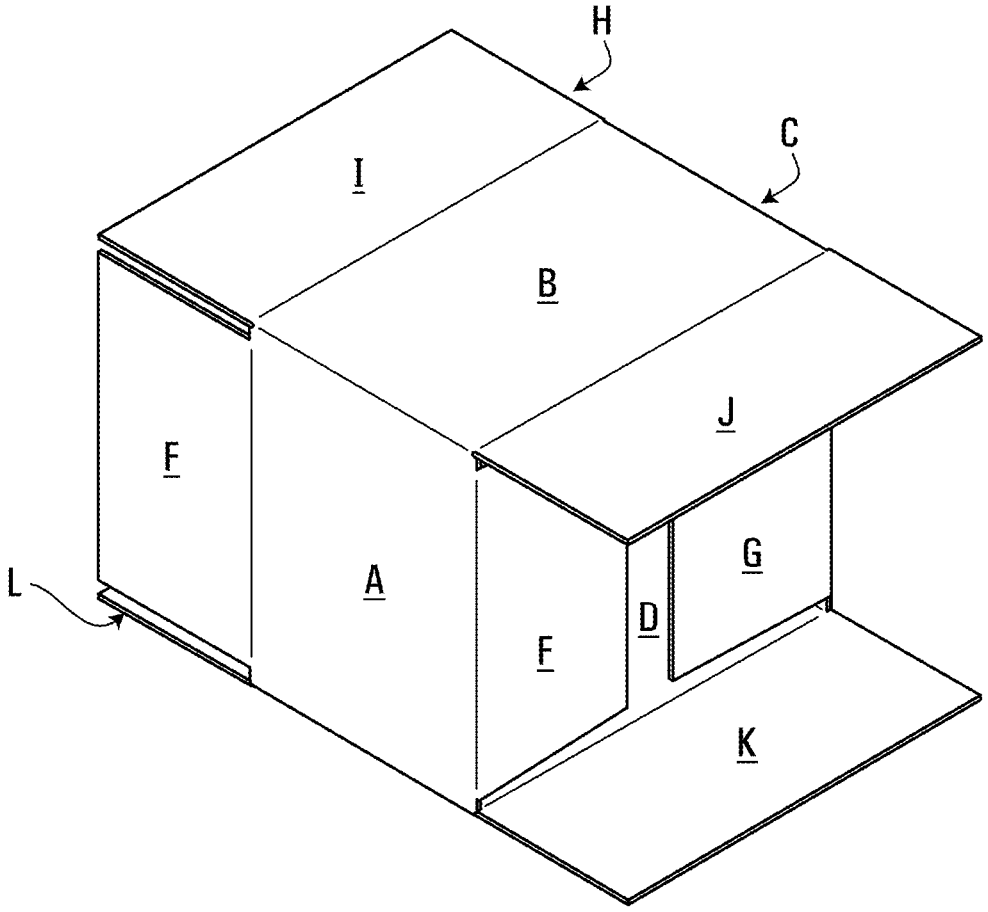

FIG. 21

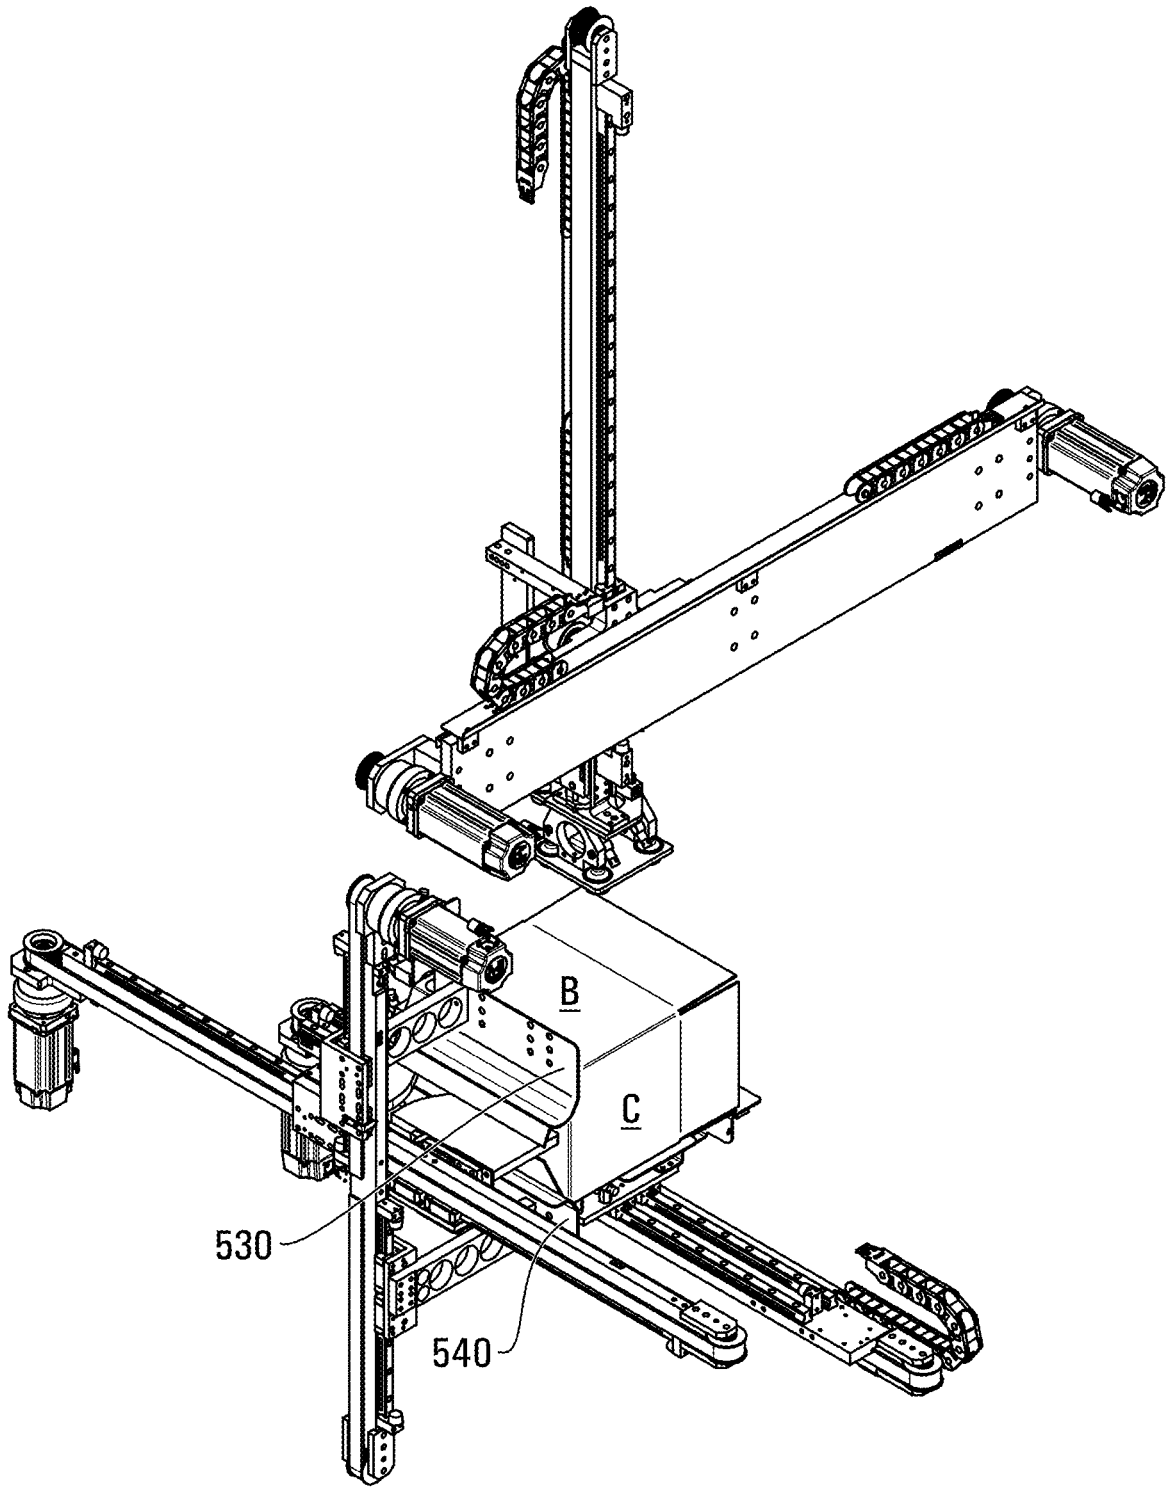

FIG. 22

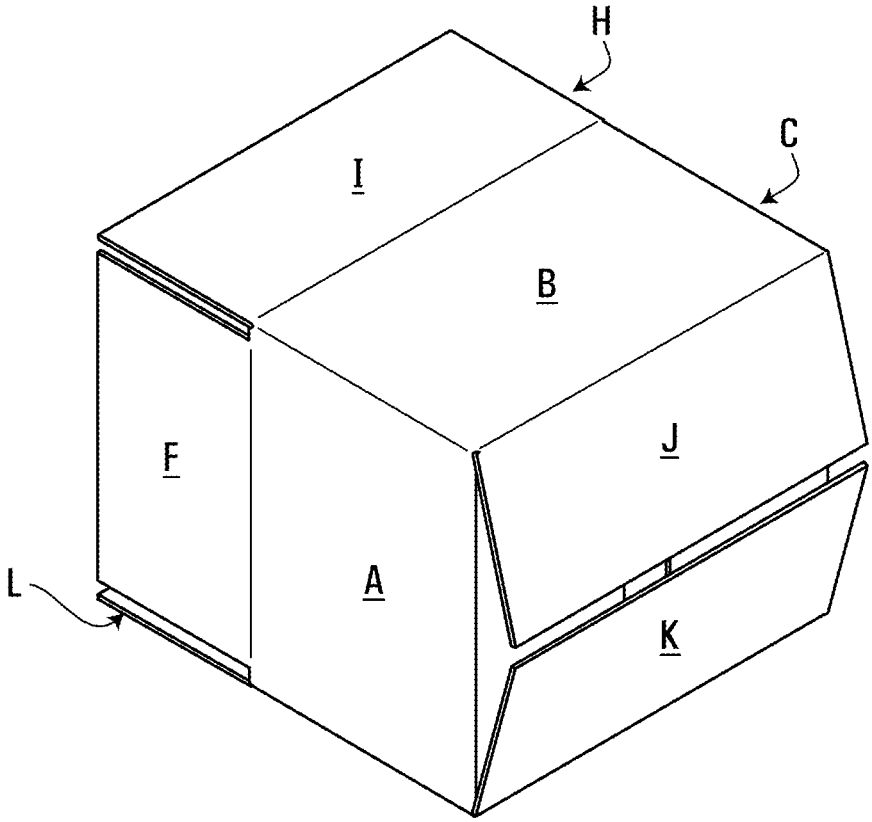

FIG. 23

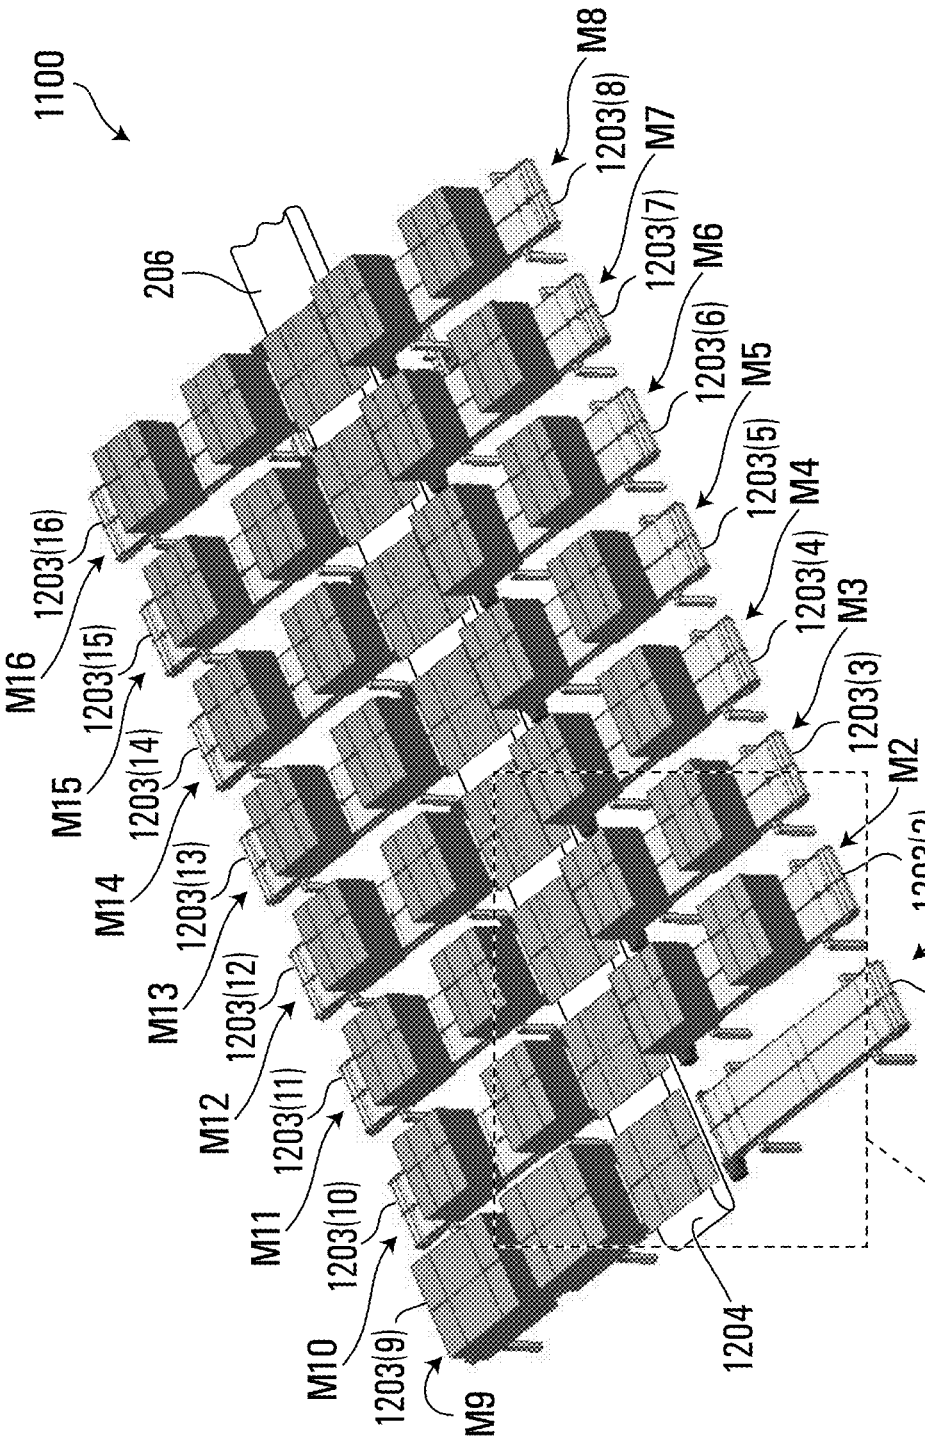
1100
206
M16
1203(16)
M15
1203(15)
M14
1203(14)
M13
1203(13)
M12
1203(12)
M11
1203(11)
M10
1203(10)
1203(9)
M9
1204
M8
1203(8)
M7
1203(7)
M6
1203(6)
M5
1203(5)
M4
1203(4)
M3
1203(3)
M2
1203(2)
M1
1203(1)

FIG. 24

FIG. 26

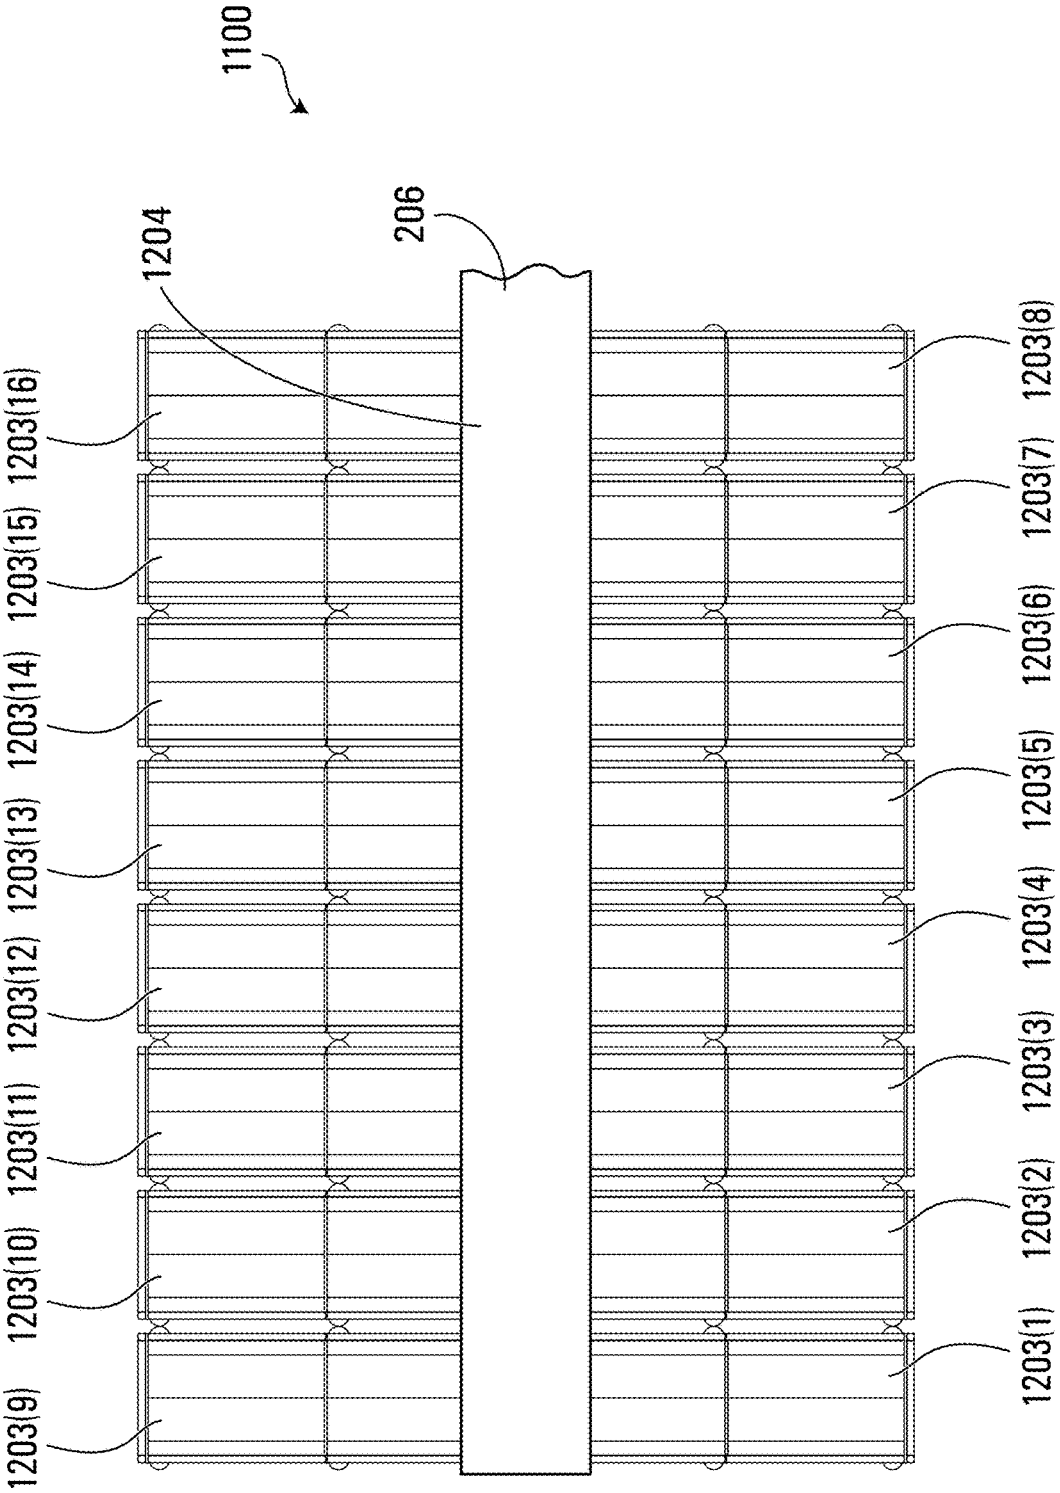
1100
206
1204
1203(16)
1203(15)
1203(14)
1203(13)
1203(12)
1203(11)
1203(10)
1203(9)
1203(8)
1203(7)
1203(6)
1203(5)
1203(4)
1203(3)
1203(2)
1203(1)

FIG. 25

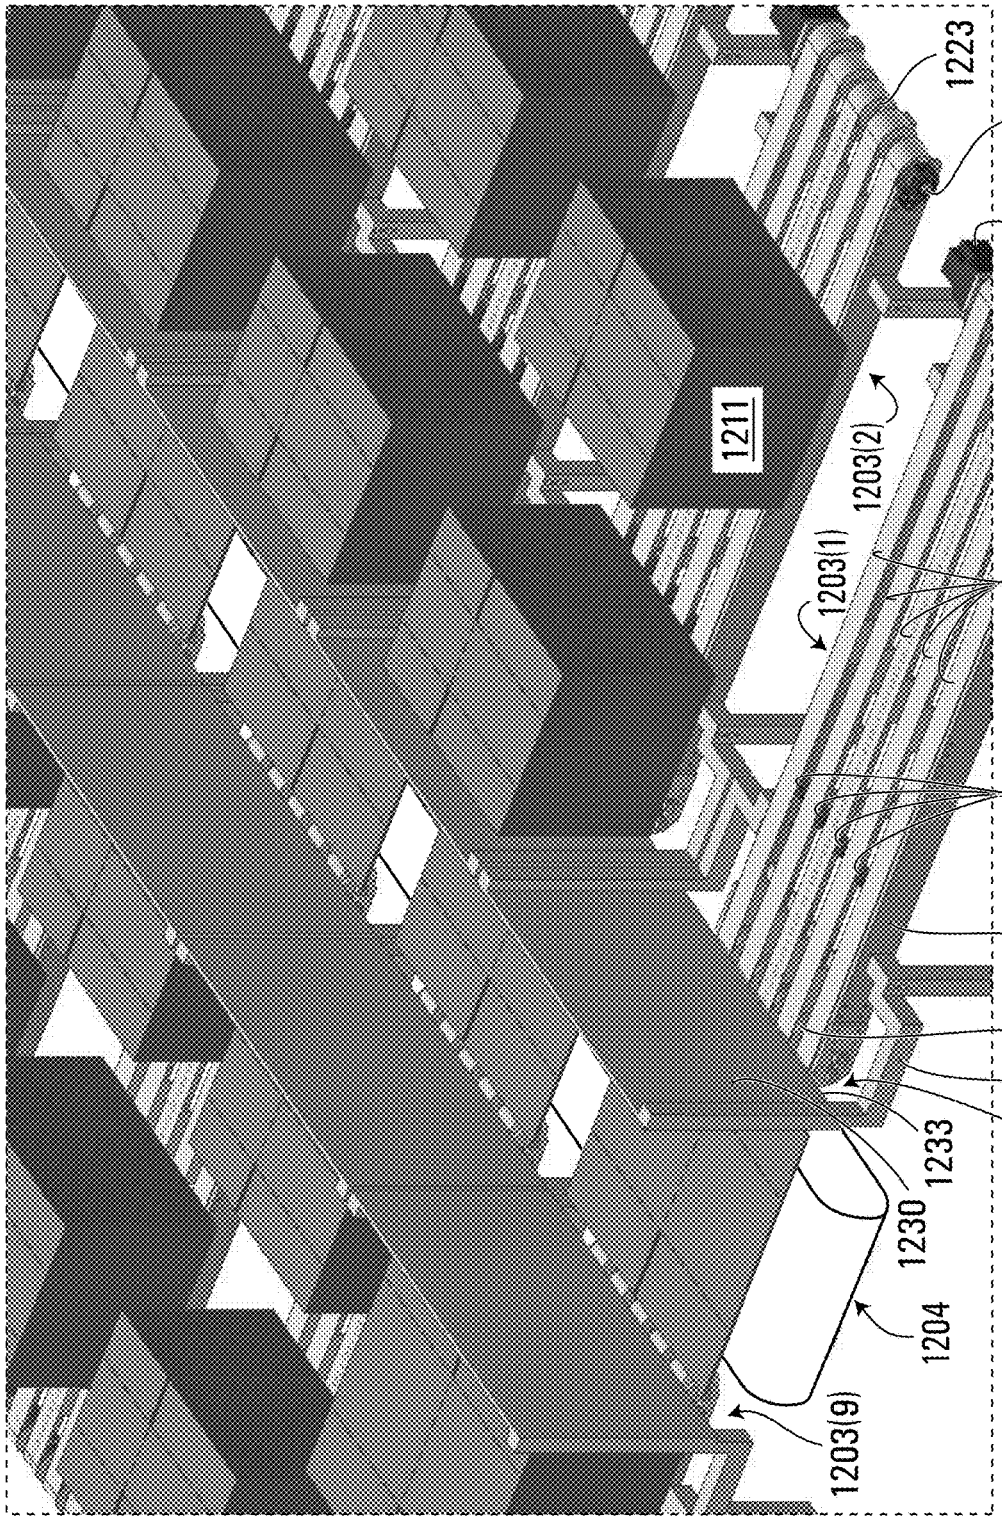
1223
1225
1219
1211
1203(2)
1203(1)
1213
1217
1215
1221
1235
1231
1233
1230
1204
1203(9)

FIG. 26

METHOD AND APPARATUS FOR ERECTING CARTONS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a Continuation of U.S. patent application Ser. No. 16/677,139, filed on Nov. 7, 2019, which is related to U.S. application Ser. No. 16/230,979, filed on Dec. 21, 2018, the contents of which are incorporated herein by reference.

FIELD

The present invention relates generally to methods and systems for forming containers.

BACKGROUND

Containers are used to package many different kinds of items. One form of container used in the packaging industry is what is known generically as a "box" and it can be used to hold various items including products and sometimes other boxes containing products. Some in the packaging industry refer to boxes used to package one or more products as "cartons". Also in the industry there are containers/boxes that are known by some as "cases". Examples of cases include what are known as regular slotted cases ("RSC"). Another type of container is what is known as a "tray" which generally is formed only on five sides and has a permanently open top. Some types of trays are used to hold other boxes or cartons; some types of trays are used to hold products (e.g. trays are sometimes used to hold bottled water). In this patent document, including the claims, the words "carton" and "cartons" and "containers" are used collectively to refer to boxes, cartons, trays, and/or cases that can be used to package any type of items including products and other cartons.

Cartons come in many different configurations and are made from a wide variety of materials. However, many cartons are foldable and are formed from a flattened state—commonly called a carton blank. Cartons may be made from an assortment of foldable materials, including but not limited to cardboard, chipboard, paperboard, corrugated fibreboard, other types of corrugated materials, plastic materials, composite materials, and the like and possibly even combinations thereof.

In many known systems, carton blanks may be serially retrieved from a carton magazine, and reconfigured from a flattened state into an erected state, and placed in a slot on a carton conveyor. The erected carton may then be moved by the carton conveyor to a loading station where the carton may be filled with one or more items and then sealed.

To permit the carton blanks to be readily opened up into an erected state from a flattened state, the blanks may be held in the magazine in a generally completely flattened configuration and then can be folded and sealed such as by gluing or taping panels and/or flaps together to form an erected carton. Specialized apparatus that can handle only flat, unfolded and unsealed blanks for cartons are known.

However, some blanks are provided to users not in a flat, unfolded and unsealed form, but rather in what is known as a "knock-down" blank or "KD". A KD blank may be provided in a folded configuration and be partially glued or otherwise sealed along one side seam thus being formed in a generally flattened tubular shape. Accordingly, each carton may require opposite panels to be pulled apart and reconfigured from a flattened tubular configuration to an open tubular configuration that is suitable for delivery to a carton conveyor. The carton blank may then have one side closed by folding and sealing the bottom flaps, and then be filled from the opposite side while on the carton conveyor. Also, any required additional flap folding and sealing such as with glue or tape can be carried out to enclose and completely close and seal the carton with one or more items contained therein. Alternately, for example the erected carton blank can be reoriented from a side orientation to an upright orientation with the opening facing upwards. The erected carton can then be moved to a loading station or loading system where it is top loaded with one or more items, such as products or other carton containing products. The top opening can then be closed by folding over and sealing the top flaps.

However, the forming of a carton ready to be filled with a product, using such a knock-down carton blank—i.e., a tubular carton blank that is flattened but partially glued along one side seam—has in the past involved quite complex machinery. Typically, tubular carton blanks are held in a magazine with the blanks being in an angled but generally downwardly disposed orientation. Another apparatus referred to as a carton erector or carton feeder fulfils the functions of retrieving the carton from the magazine, opening the flattened carton up into a generally tubular configuration, and then placing it on a carton conveyor. The carton feeder typically has suction cups and will move in a generally arcuate path between the various stations for retrieval, opening and discharge. Examples of such carton feeders are disclosed in U.S. Pat. No. 5,997,458 to Guttinger et al. issued Dec. 7, 1999, and U.S. Pat. No. 7,326,165 issued to Baclija et al. on Feb. 5, 2008, the contents of both of which are hereby incorporated herein in their entirety. Other similar types of carton erectors may retrieve blanks in series from a magazine using suctions cups, open the blanks using some other kind of mechanism such as carton breaker, and then feed the opened blanks to belt mechanisms which can pass the blanks to a carton conveyor to transport the blank. However, in such systems, difficulties arise in designing system components that can achieve a clean retrieval and handoff by the carton feeder/erectors apparatus.

In the formation of cartons from a corrugated or otherwise strengthened material such as a corrugated fibreboard material, it is also typically necessary as part of the forming process to fold over various parts of a blank made from a corrugated fibreboard material. However, current folding processes and machines are relatively complex.

Accordingly, an improved forming method and system is desirable which can readily form a container such as a carton from a generally flat blank.

SUMMARY

In an embodiment, in erecting a carton from a knock-down carton blank, the blank is placed on a base of a bed of a shuttle such that a bottom side panel of the blank abuts the base. The bottom side panel of the blank is then gripped with a gripper of the base and a top side panel of the blank is raised while advancing the shuttle in a horizontal direction so as to open said knock-down carton blank into a carton sleeve.

According to one aspect there is provided a method for use in erecting a carton, comprising: placing a knock-down carton blank on a base of a bed of a shuttle such that a bottom side panel of said knock-down carton blank abuts said base; gripping said bottom side panel of said blank with

a gripper of said base; raising a top side panel of said knock-down carton blank while advancing said shuttle in a horizontal direction so as to open said knock-down carton blank into a carton sleeve.

According to another aspect, there is provided apparatus for use in erecting a carton, comprising: a shuttle having a bed with a horizontally extending base having base grippers; shuttle drive apparatus for driving said shuttle in a horizontal advancement direction; an end effector having end effector grippers; an end effector movement device for moving said end effector; a controller operatively associated with said shuttle drive apparatus, said end effector movement device and said grippers and configured to: operate said movement device and end effector to grip a top side panel of a knock-down carton blank and place said knock-down carton blank on said horizontally extending base of said shuttle such that a bottom side panel of said knock-down carton blank abuts said horizontally extending base; activate said base grippers to grip said bottom side panel of said blank; operate said movement device to raise said top side panel of said knock-down carton blank with said end effector while horizontally advancing said shuttle in order to open said knock-down carton blank into a carton sleeve.

Other aspects and features will become apparent to those of ordinary skill in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In the figures which illustrate example embodiments,

FIGS. **1** and **2** are top perspective views of a system made in accordance with an embodiment;

FIG. **3** is a schematic control diagram;

FIG. **4**A is a plan view of one side of a knock-down blank that may be processed by the system;

FIG. **4**B is a perspective view an opposite side of the knock-down blank of FIG. **4**A;

FIG. **5** is a perspective view of a carton erected from the knock-down blank of FIGS. **4**A and **4**B;

FIG. **6** is a top perspective view of a portion of the system of FIGS. **1** and **2**;

FIG. **7** is a side view of the portion of FIG. **6**;

FIG. **8** is a top perspective view of another portion of the system of FIGS. **1** and **2**;

FIG. **9** is a bottom perspective view of the portion of FIG. **8**;

FIG. **10** is a top perspective view of another portion of the system of FIGS. **1** and **2**;

FIG. **11** is a bottom perspective view of the portion of FIG. **10**;

FIG. **12** is a top perspective view of another portion of the system of FIGS. **1** and **2**;

FIG. **13** is a bottom perspective view of the portion of FIG. **12**;

FIG. **14** is a top perspective view of another portion of the system of FIGS. **1** and **2**;

FIG. **15** is a bottom perspective view of the portion of FIG. **14**;

FIG. **16** is a flow diagram illustrating operation of a controller of the system of FIG. **1**;

FIGS. **17** to **20** and **22** are top perspective views of a portion of the system of FIGS. **1** and **2** illustrating erection of a knock-down blank into a carton;

FIGS. **21** and **23** are perspective views of a carton sleeve at different stages of being erected into a carton;

FIG. **24** is a perspective view of an input end of a system made in accordance with another embodiment;

FIG. **25** is a plan view of FIG. **24**; and

FIG. **26** is a detail perspective view of a portion of FIG. **24**.

DETAILED DESCRIPTION

With reference initially to FIGS. **1** and **2**, in overview, a carton forming system **100** has a magazine **110** adapted to receive and hold a plurality of knock-down carton blanks **111** and an end effector **120** for retrieving the knock-down carton blanks from a pick-up area and placing them on a shuttle **140**. As will be described hereinafter, the end effector **120** and shuttle **140** co-operate to manipulate the knock-down blanks in such a way as to erect them into sleeves.

System **100** may also include a folding apparatus generally designated **130**, configured to fold one or more flaps of each sleeve, and a sealing station **135** at which flaps of the cartons are sealed. System **100** may also include a carton re-orienting station **116** and a carton discharge conveyor **117** for receiving and moving cartons away once they have been fully erected.

An example of a scheme for the power and data/communication configuration for system **100** is illustrated in FIG. **3**. The operation of the components of carton forming system **100**, and of system **100** as a whole, may be controlled by a programmable logic controller ("PLC") **132**. PLC **132** may be accessed by a human operator through a Human Machine Interface (HMI) module **133** secured to a frame **109** (FIG. **1**) of the system. HMI module **133** may be in electronic communication with PLC **132**. PLC **132** may be any suitable PLC and may for example include a unit chosen from the Logix 5000 series devices made by Allen-Bradley/Rockwell Automation, such as the ControlLogix 5561 device. HMI module **132** may be a Panelview part number 2711P-T15C4D1 module also made by Allen-Bradley/Rockwell Automation.

Electrical power can be supplied to PLC **132**/HMI **133**, and to all the various servo motors and DC motors that are described further herein. Compressed/pressurized air can also be supplied to the vacuum generators and pneumatic actuator through valve devices such as solenoid valves that are controlled by PLC **132**, all as described further herein. Servo motors may be connected to and in communication with servo drives that are in communication with and controlled by PLC **132**. Similarly, DC motors may be connected to DC motor drives that are in communication with and controlled by PLC **132**, again all as described further herein. Additionally, various other sensors are in communication with PLC **132** and may (although not shown) also be supplied with electrical power.

With reference now to FIGS. **4**A, **4**B, and **5**, an example of one kind of knock-down carton blank **111** that can be processed by system **100** to form a regular slotted case (RSC) is disclosed. Other types of knock-down carton blanks, and knock-down carton blanks of different sizes can also be processed by system **100**.

Each carton blank **111** may be generally initially formed and provided in a knock-down configuration—i.e., a flattened tubular configuration—as shown in FIGS. **4**A and **4**B. Each bank **111** has a height dimension "Ht"; a length dimension "L"; and a major panel Length "Q" (see FIG. **4**A). By inputting each of these three dimensions for a blank to be processed by system **100** into PLC **132**, PLC **132** can determine if the system **100** can process that size blank without the necessity for manual intervention to make an

adjustment to one or more components of the system **100**. If PLC **132** determines that the adjustment can be made without human intervention, the PLC may make the necessary adjustments to positions and/or movements of at least some of the components forming system **100**.

Blank **111** may have opposed major side panels A and C integrally interconnected to a pair of opposed minor side panels B and D to form a sleeve, seen in FIG. **5**, when opened. An overlap strip of carton blank material may be provided between panel B and panel A that can be sealed by conventional means such as a suitable adhesive, to provide an overlapping seam joint in the vicinity of "P" (see FIG. **4**A). This seam joint at the overlap forms a knock-down carton blank in which the panels A, B, C and D are joined into a continuous blank that is of generally flattened tubular configuration, as shown in FIGS. **4**A and **4**B.

Also, as shown in FIGS. **4**A, **4**B and **5**, are major and minor end flaps E, H, L, I that are provided at one end of the respective major and minor side panels A-D. A second set of major and minor end flaps F, G, K and J are provided on the opposite, lower/bottom end of the major and minor side panels A-D. However, in other embodiments, cartons having other panel configurations can be formed. The panels and flaps are connected to adjacent flaps and/or panels by predetermined fold/crease lines as shown in FIGS. **4**A and **4**B. These fold/crease lines may for example be formed by a weakened area of material and/or the formation of a crease with a crease forming apparatus. The effect of the fold lines is such that one panel such as for example panel A can be rotated relative to an adjacent panel such as D or B along the fold lines. Flaps may also fold and rotate about fold lines that connect them to their respective panels.

As will be described hereinafter, carton blank **111** may be transformed from a knock-down blank (i.e., a generally flattened tubular configuration) to an open sleeve (open tubular configuration) and the flaps may be folded and sealed to form the desired erected carton configuration. System **100** is configured to deliver each carton with an upwardly facing opening suitable for top loading. In another embodiment, system **100** may be configured to deliver each carton with a sidewards facing opening suitable for side loading.

Carton blanks **111** may have flaps that provide material that can, in conjunction with a connection mechanism (such as for example with application of an adhesive, sealing tape or a mechanical connection such as is provided in so-called "Klick-Lok™" carton blanks) interconnect flap surfaces, to join or otherwise interconnect, flaps to adjacent flaps (or in some embodiments flaps to panels), to hold the carton in its desired erected configuration.

Carton blanks **111** may be made of any suitable material (s) configured and adapted to permit the required folding/bending/displacement of the material to reach the desired configuration. Examples of suitable materials are chipboard, cardboard or creased corrugated fiber-board. It should be noted that the blank may be formed of a material which itself is rigid or semi-rigid, and not easily foldable but which is divided into separate panels and flaps separated by creases or hinge type mechanisms so that the carton can be erected and formed.

Turning now to the various portions of system **100**, with reference to FIGS. **1** to **3**, magazine **110** may be configured to hold a plurality of vertically stacked knock-down carton blanks **111**, and be operable to move the stack of carton blanks **111** in a horizontal direction generally parallel to horizontal axis X under the control of PLC **132**, to a pick-up location where end effector **120** can retrieve cartons from the magazine.

Magazine **110** may comprise a single conveyor or other blank feed apparatus to deliver blanks to a pick-up location. In the illustrated embodiment, two conveyors are disclosed: an infeed conveyor **204** and an alignment conveyor **206**. Infeed conveyor **204** may be configured and operable to move a stack of blanks **111** from a stack input position (where a stack may be loaded onto conveyor **204** such as by human or robotic placement) to a position where the stack of blanks is transferred to a horizontally and transversely aligning, alignment conveyor **206**. Alignment conveyor **206** may be positioned downstream in relation to infeed conveyor **204** and be used to move the stack of blanks to the pick-up location. Magazine **110** may be loaded with, and initially hold, a large number of carton blanks **111** in vertical stacks, with the stacks resting on infeed conveyer **204**. A rear wall **202** mounted to frame **109** is configured to retain a stack from falling backwards when initially loaded on conveyor **204**. Rear wall **202** may have a generally planar, vertically and transversely oriented surface facing the stack of blanks **111**. Conveyor **204** may be of an appropriate length to be able to store a satisfactory number of stacks of blanks in series on conveyor **204**. PLC **132** can control the operation of conveyor **204** to move one stack at a time to the alignment conveyor **206**.

With infeed-conveyor having one or more stacks of blanks arranged longitudinally on infeed conveyor **204**, the stacks can be fed in turn onto alignment conveyor **206**. A sensor (not shown) may be provided in the vicinity of conveyor **204** to monitor whether there is a stack waiting on conveyor **204** and that sensor may be operable to send a warning signal to PLC **132** that can alert an operator that the magazine is low and needs to be replenished. The sensor may be a part number 42GRP-9000-QD made by Allen Bradley.

Of particular note, a plurality of stacks of blanks might be provided on conveyor **204** and each stack may be have associated information that can be read by an information reader **205** such as electronic or an optical reading device. For example, a bar code may be provided on each stack of blanks, such as on the top or bottom blank of the stack. The bar code may be read by a bar code reader associated with the infeed conveyor **204**. The bar code reader may be in communication with PLC **132**. The bar code may provide information indicative of a characteristic of the blanks in the stack. For example, the bar code may identify the size and/or type of blank in a particular stack. Other information indicators may be used such as for example RFID tags/chips and RFID readers. The information can then be automatically provided by the information reader to PLC **132** which can determine whether the current configuration of system **100** can handle the processing the particular type/size of blanks without having to make manual adjustments to any of the components. It is contemplated that within a certain range of types/sizes of blanks, system **100** is able to handle the processing of different types/sizes of blanks without manual adjustment of any components of system **100**. The bar code/RFID tag may provide the information about the dimensions of the blank as discussed above and then PLC **132** can determine adjustments, if any, that need to be made to (a) the components of the magazine; (b) the movement of the end effector **120**; (c) the movement of the shuttle **140**; and (d) at least some of the components of the folding apparatus **130** and some components at the sealing station **135** to be able to process a particular blank or a particular

stack of blanks. The result is that system **100** may be able to automatically process at least some different types of blanks to form different cartons, without having to make manual operator adjustments to any components of system **100**.

The belt of infeed conveyor **204** may be driven by a suitable motor such as a DC motor or a variable frequency drive motor **291** (see FIG. **3**) controlled through a DC motor drive (all sold by Oriental under model AXH-5100-KC-30) by PLC **132**.

Once PLC **132** is given an instruction (such as by a human operator through HMI module **133**), infeed conveyor **204** may be activated to move a stack of blanks **111** horizontally downstream. PLC **132** can control motor **291** through the motor drive and thus conveyor **204** can be operated to move and transfer the stack towards and for transfer to the alignment conveyor **206**.

Stack alignment conveyer **206** may be driven by a motor **292** (FIG. **3**) that may be like motor **291** and with a corresponding motor drive. Motor **292** may also be controlled by PLC **132**. Conveyor **206** may be operated to move the stack of blanks **111** further horizontally until the front face of the stack abuts a planar front stop picket wall **218**.

The belts of conveyors **204** and **206** may be made from any suitable material such as for example Ropanyl.

A sensor **242** (FIG. **3**), such as an electronic eye model 42KL-D1 LB-F4 made by ALLEN BRADLEY, may be located within the horizontal gap between conveyors **204** and **206**. Sensor **242** may be positioned and operable to detect the presence of the front edge of a stack of blanks as the stack of blanks begins to move over the gap between conveyors **202** and **206**. Upon detecting the front edge, sensor **242** may send a digital signal to PLC **132** (FIG. **3**) signalling that a stack has moved to a position where conveyor **206** can start to move. PLC **132** can then cause the motor **292** (FIG. **3**) for conveyor **206** to be activated. In this way, there can be a "hand-off" of the stack of blanks from infeed conveyor **204** to alignment conveyor **206**.

Once the rear edge of the stack of blanks **111** has passed the sensor **242** a signal may be sent to PLC **132** which can then respond by sending a signal to shut down the motor **291** (FIG. **3**) driving conveyor **204**. Conveyor **204** is then in a condition ready to be loaded with another stack of blanks **111**. Meanwhile conveyor **206** can continue to operate as it moves the stack of blanks **111** to the pick-up location.

The presence of a stack of blanks **111** at the pick-up location may be detected by a sensor **240** (FIG. **3**) that may be the same type of sensor as sensor **242**. The sensor **240** may detect the presence of the front edge of a stack of blanks at the pick-up location and may send a digital signal to PLC **132** signalling that a stack is at the pick-up location. At the pick-up location, the stack of blanks may be "squared up" and thereafter, once properly aligned, single carton blanks **111** may be retrieved in series from the stack of blanks **111** by engagement of the end effector **120** with the uppermost blank in the stack.

During movement of the stack of blanks **111** horizontally by conveyors **204** and **206**, the left hand side of the stack of blanks may be supported and guided by a left hand side wall **200** which is fixed to the frame **190**. Side wall **200** may be oriented generally vertically and may extend horizontally for substantially the full lengths of conveyors **204** and **206**.

The outer side of the magazine **110** adjacent conveyor **204** may be left open; however the outer side of conveyor **206** has a moveable outer guide wall **201**. The mounting arrangement for side wall **201** is illustrated in FIGS. **6** and **7**. Turning to these figures, transverse bottom support plates **251** and **255** are supported on the factory floor spaced from, and parallel to, each other. Each of support plates **251**, **255** has mounted to a respective upper surface thereof tracks **253**, **257**. Side wall **201** is supported by connector blocks **267** which are slidably received on tracks **253**, **257**.

A drive mechanism in electronic communication with PLC **132** may be provided to drive side wall **201** on its tracks. Specifically, a servo motor **258** may be provided and be in electronic communication with PLC **132** through a servo drive (as seen in FIG. **3**). Examples that could be used are servo motor MPL-B1530U-VJ42AA made by ALLEN BRADLEY, in combination with servo drive 2094-BC01-MP5-S also made by ALLEN BRADLEY and gear head AE050-010 FOR MPL-A1520 made by Apex. The servo motor **258** may drive a shaft **262** to, in turn, drive an endless belt **264** attached to each of the blocks **267**. An encoder may be provided within or in association with servo drive motor **258** and the encoder may rotate in relation to the rotation of the shaft of the servo drive. The encoder may be in communication with, and provide signals to the servo drive which can then pass on the information to PLC **132**. Thus, PLC **132** may be able to determine the transverse position of side wall **201** and can operate the servo drive **258** to adjust the position of the side wall **201**. The particular type of encoder that may be used is known as an "absolute" encoder. Thus once the encoder is calibrated so that a position of the shaft **262** is "zeroed", then even if power is lost to system **100**, the encoder can maintain its zero position calibration.

During operation of system **100**, while side wall **200** is fixed, side wall **201** is moved laterally as part of a blank stack alignment procedure to provide for generally longitudinal alignment of the end edges of blanks **111** in the stack being prepared for processing as the stack is held between side walls **200** and **201**. Specifically, the PLC positions side wall **201** based on the height dimension Ht (FIG. **4**A) of the knock-down blanks in the stack being readied for processing as previously read by information reader **205**.

Side wall **201** has a lateral tamping apparatus **275** to tamp the blanks **111** in a direction toward the front picket wall **218** so as to align of the front and rear side edges of the blanks **111** in the stack. Tamping apparatus has a tamping plate **280** that rides in a longitudinal slot **272** in wall **201**. The end of tamping plate **280** which extends through the slot to the outside of wall **201** is joined to endless belt **276** that is driven by servo motor **278** under control of the PLC.

Tamping plate **280** that is located transversely inwardly of the inner surface of side wall **201**. Movement of endless belt **276** causes tamping plate **280** to engage the rear side edges of the blanks **111** in the stack to be processed with the consequence that, as the front edges of those blanks are pushed up against the inner surface of the front picket wall **218**, the front and rear edges of the blanks become laterally aligned. While a servo drive and belt combination is illustrated, other alignment devices, such as a pneumatic actuator with a piston attached to the tamping plate, could be used.

By operation of PLC **132**, suitable adjustment of outside wall **201** and tamping plate **280**, a stack of blanks **111** can be "squared-up" and precisely located at a pick-up location—that is, held against inside wall **200** and front picket wall **218**. Once in the pick-up location, the blanks are in the proper location for being engaged by the end effector **120**.

In particular, once the stack of blanks **111** have generally reached the pick-up location, PLC **132** can send a signal to drive mechanism **260** to cause the drive mechanism **260** to cause side wall **201** to move laterally inwards towards the side of stack of blanks **111**. PLC **132** will cause the drive mechanism **260** to move a sufficient distance to cause the edges of the blanks **111** to become in contact along their

length with inner surface of longitudinally aligned inner surface of side wall **201**. However, PLC **132** will not cause side wall **201** to be moved to such an extent that it creates a force on the stack of blanks such that causes the blanks to buckle/be damaged if they are compressed to a significant extent between side walls **200** and **201**. PLC **132** determines how much to move side wall **201** towards side wall **200** by virtue of the carton size dimensions that have been input to the PLC, including dimension Ht (see FIG. **4**A). The wall **201** can be moved so as to apply a slight compression that can be fine-tuned such as by trial and error for different sized carton blanks. It should be noted that for many sized cartons, the manufacturers comply with industry standard carton sizes.

Once the longitudinal alignment has been effected by movement of side wall **201**, PLC **132** can cause actuator **276** to be activated to cause the vertical plate **280** to engage the rear edges of the blanks **111** in the stack. PLC **132** may cause the vertical plate **280** to move a sufficient distance to cause the rear edges of the blanks **111** to come in contact with inner surface of plate **280**. However, the vertical plate **280** is not moved to such an extent that it creates a force on the stack of blanks that would cause the blanks to buckle/be damaged if they are compressed too much between plate **280** and front picket wall **218**.

Thus, by way of review: The vertical tamping plate **280** can be adjusted by the PLC operating servo drive **278** in the X-direction so that when the vertical tamping plate **280** is retracted it is in the right position to push the blanks up against the front picket wall **218** (without squeezing them).

In review the tamping sequence for ensuring the blanks are properly squared up at the pick-up location steps include the following:

1. The right-hand-side magazine side guide wall **201** under control of PLC **132** expands wide enough to allow the stack of blanks to enter on alignment conveyor **206**, and clear tamping plate **280** even if the stack is misaligned and/or the blanks in the stack are not perfectly square with each other and in relation to the X-Y axes.

2. The conveyor **206** advances the stack of blanks **111** towards the front stop picket wall and such that the stack may abut the front stop picket wall **218**.

3. The side guide wall **201** may move inwardly to make contact with the side of the case stack and press the side wall **201** against the left hand side guide wall **200**. This aligns the cases so the side edges of blanks are aligned with each other and the longitudinal side wall of the walls **200** and **201**. This also brings the tamping plate in behind the stack of blanks.

4. The servo drive **278** may be activated to cause the tamping plate **280** to press the stack forward, thereby aligning the blanks in the stack so that their front and rear edges are vertically aligned with each other and with the inner face of the plate **280** and the inside surface of front wall **218**.

5. The blanks are then properly positioned so that the end effector can begin picking up blanks from the stack.

In order to pick-up blanks, the end effector may have one or more suction cups providing a suction force to a panel acting generally normal to the surface of the panel that is engaged, as described further below. Other types of suitable engagement devices might be employed.

Turning to FIGS. **8** and **9**, end effector **120** has a dedicated, independently driven and controlled movement apparatus **115** that allows end effector **120** to move in a plane defined by both vertical axis Z and horizontal axis Y in FIG. **8**. Thus, movement of the end effector **120** can only be in the vertical Z and horizontal Y directions (i.e. directions parallel to axes Z and Y in FIG. **8**)—the end effector cannot move in a horizontal X direction (i.e. a direction parallel to axis X in FIG. **8**). If the movement of the end effector **120** is restricted to only Z and Y directions, a moving apparatus can be constructed that is relatively less complex than if movement in all three directions is required.

Movement apparatus **115** includes a vertically oriented support tube **169** that may be generally rectangular in cross section to which end effector **120** is mounted by mounting blocks **190** so that end effector **120** moves in space with support tube **169**.

The support tube **169** is slidably mounted to a slide block **158** for vertical movement and slide block **158** is, in turn, mounted to a horizontal rail system for horizontal movement. More specifically, slide block **158** has a pair of spaced, longitudinally and horizontally extending short inner blocks, each one fitting on one longitudinally extending rail **160**, **162** that holds the blocks securely but allows blocks to slide horizontally relative to the rails. An example of a suitable rails system is the Bosch Rexroth ball rail system in which the rails are made from steel and the blocks have a race of ceramic balls inside allowing the block to slide on the rails. Rails **160**, **162** are generally oriented horizontally are attached to a horizontally extending beam **108** that is connected to frame **109**. Slide block **158** may be mounted to rails **160** or **162** for horizontal sliding movement along the rails. Slide block **158** has a rail system to allow support tube **169** to be connected to it so as to be able to move vertically relative to slide block **158**. More specifically, a rail extends vertically along a back surface of tube **169** and is interconnected to a runner of slide block **158**. Again, a suitable rail system is the Bosch Rexroth ball rail system referenced above. Thus, support tube **169** can slide vertically relative to slide block **158** and will move horizontally with the slide block.

To drive the end effector **120** horizontally and vertically, a drive apparatus is provided which includes a left side drive motor **150** and a right side drive motor **154** (both of which may be servo motors such as the model MPL-B330P-MJ24AA made by Allen Bradley) mounted to either end of beam **108**. Servo drive **150** has a drive wheel **152** and servo drive **154** has a drive wheel **156**. Both servo motors **150** and **154** can be independently driven in both directions at varying speeds by PLC **132** (FIG. **3**) through servo drives. In this regard, both servo motors **150** and **154** may be provided with two separate ports, one for connection to a power line and the other for connection to a communication line to provide communication with the servo drive and PLC **132**. Servo motors **150**, **154** may also have a third input which may provide input for an electric braking mechanism. It should be noted that all of the servo motors described herein may be similarly equipped.

Four freely rotatable pulley wheels **155***a*, **155***c*, **155***d* and **155***f* are secured to the front face of the slider block **158** and a further freely rotatable pulley wheel **155***b* is attached to the upper end of support tube **169**. One end of a drive belt **153**—that may for example be made from urethane with steel wires running through it—is fixedly attached to the bottom of support tube **169** by a belt block **159***b*. From there the belt extends upwardly to block pulley **155***f*, around the upper side of block pulley **155***f* and then horizontally to servo drive wheel **152**. The belt loops around the servo drive wheel **152** and extends around the underside of pulley **155***a* and then upwards to pulley **155***b*. From there belt extends around pulley **155***b*, downwards to block pulley **155***c*, around block pulley **155***c* and then to servo drive wheel **156**. After passing around servo drive wheel **156**, belt **153**

extends to the upper side of block pulley **155***d*. From block pulley **155***d*, belt **153** then extends vertically downwards to the bottom of the support tube **169** where it attached to the support tube by a belt block **159***a*. With this arrangement, by adjusting the relative rotations of servo drive wheels **152** and **156** through the operation of the servo motors **150** and **154**, the vertical position of support tube **169** relative to slide block **158** can be adjusted. Additionally, by adjusting the relative rotations of servo drive wheels **152** and **156**, the horizontal position of slide block **158** on rails **160**, **162** can be adjusted thus altering the horizontal position of support tube **169** and end effector **120**. It will thus be appreciated that by adjusting the direction and speeds of rotation of drive wheels **152**, **156** relative to each other the support tube **169** can be moved vertically and/or horizontally in space within the physical constraints imposed by among other things the position of the servo drive wheels **152** and **156**, the length of the belt **153**, and the length of support tube **169**. The following will be appreciated in particular:

- If wheels **152** and **156** both remain stationary then the position of support tube **169** will not be altered;
- If wheels **152** and **156** both rotate in the same clockwise direction and at the same speed relative to each other, then support tube **169** (and thus end effector **120**) will move horizontally from right to left;
- If wheels **152** and **156** both rotate in the same counter-clockwise direction and at the same speed relative to each other, then support tube **169** (and thus end effector **120**) will move horizontally from left to right;
- If wheel **152** rotates counter-clockwise, and wheel **156** rotates in opposite clockwise rotational directions, but both wheels rotate at the same rotational speed relative to each other, then support tube **169**, and thus end effector **120**, will move vertically downwardly;
- If wheel **152** rotates clockwise, and wheel **156** rotates in opposite counter-clockwise rotational directions, but both wheels rotate at the same rotational speed relative to each other, then plates **164**, **166** will move vertically upwardly.

It will be appreciated that if the speeds and directions of the two servo motors are varied in different manner, then the motion of the support tube **169** (and thus end effector **120**) can be created that has both a vertical component as well as a horizontal component. Thus any desired path within these two degrees of freedom (vertical in the Z direction and horizontal in the Y direction) can be created for support tube **169**—and thus for the end effector **120** (such as a path having curved path portions). Thus, by controlling the rotational direction and speed of the motors **150**, **154** independently of each other, PLC **132** can cause support tube **169** (and thus end effector **120**) to move along any path within these two degrees of freedom, within the physical constraints imposed by the spacing of the drive wheels **152**, **156** and pulley wheel **155***b*, and the bottom of support tube **169**.

An encoder may be provided for each of the servo drive motors **150** and **154** and the encoders may rotate in relation to the rotation of the respective drive wheels **152**, **156**. The encoders may be in communication with, and provide signals through the servo drives to PLC **132**. Thus PLC **132** can in real time know/determine/monitor the position of the belt **153** in space and thus will determine and know the position of the end effector **120** in space at any given time. The particular types of encoders that may be used are known as "absolute" encoders. Thus the system can be zeroed such that due to the calibration of both encoders of both servo drives **150** and **154**, the zero-zero position of the end effector in both Z and Y directions is set within PLC **132**. The zero-zero position can be set with the end effector at its most horizontally left and vertically raised position. PLC **132** can then substantially in real time, keep track of the position of the end effector **120** as it moves through the processing sequence fora blank **111**.

Also associated with moving apparatus **115** is a first, generally horizontally oriented caterpillar device **114** and a second generally vertically oriented caterpillar device **118**. Each of the caterpillars **114** and **118** have a hollow cavity housing hoses and wires carrying pressurized air/vacuum and electrical/communication wires. Caterpillar **114** allows such hoses and wires to move longitudinally as the support tube **169** and erector head **120***b* are moved longitudinally. Caterpillar **118** allows such hoses and wires to move vertically as the support tube **169** and erector head **120***b* are moved vertically. The caterpillars allow hoses and wires to supply end effector **120**. In this way both pressurized air/vacuum and/or electrical communication wires may be brought form locations external to the frame **109** onto the moving end effector **120**. An example of suitable caterpillar devices that could be employed is the E-Chain Cable Carrier System model #240-03-055-0 made by Ignus Inc. It should be noted that electrical communication between the PLC **132** and the end effector **120** could in other embodiments be accomplished using wireless technologies that are commercially available.

End effector **120** has a bottom suction plate **327** with a generally square shape and four peripheral flanged openings, each receiving a suction cup **312**. It should be noted that while many types of suction cups may be employed on the end effector, a preferred type of suction cup is the model B40.10.04AB made by Piab. Each suction cup **312** is connected to an outlet from a vacuum generator **330** (FIG. **3**). The vacuum generator may be any suitable vacuum generator device such as for example the model VCH12-016C made by Pisco. Vacuum generators each have an inlet interconnected to a hose (not shown) that can carry pressurized air from an air compressor or other vacuum source to the vacuum generator. The vacuum generator converts the pressurized air supplied to the inlet port into a vacuum at one of the outlet ports. That vacuum outlet port is interconnected to a suction cup **312** so that the suction cup can have a vacuum force. A solenoid valve device **340** (FIG. **3**) is interposed along the pressurized air channel running between each vacuum generator and the source of pressurized air. The solenoid valve device **340** may for example be a model CPE14-M1BH-5L-⅛ made by Festo. Valve device **340** is in electronic communication with PLC **132** and controlled by PLC **132**. In this way PLC **132** can turn on and off the supply of vacuum force to the suction cups **312**.

End effector **120** also has a reciprocating sensor rod **380** which, when not in contact with a carton blank, extends downwards through a central aperture in plate **327**, below the level of the plane of suction cups **312**. When the end effector **120** is brought vertically downwards to retrieve a blank on a stack of blanks **111** in magazine **110**, the erector head's movement just prior to suction cups **312** contacting with the upper surface of the blank will be generally vertically downwards. Prior to the suction cups **312** contacting the surface of a top panel of a blank, sensor rod **380** will impact the top panel and cause sensor rod **380**, which may be resiliently displaced due to a spring mechanism biasing the rod downwards, to be pushed upwards. This movement upwards of sensor rod **380** relative to plate **327** will cause a sensor (not shown) to be activated and send a signal to PLC **132**. The sensor may be an inductive prox-

imity sensor where a metal cylinder fixed on the rod is sensed by the sensor's circuitry due to changes in the inductance of an induction loop inside the sensor. Such a sensor may be an 871FM-D8NP25-P3 sensor made by ALLEN BRADLEY. PLC **132**. When the PLC receives a signal from the sensor, it may respond to that signal by causing servo drives **150** and **154** to slow down so that the final few centimeters (e.g. 3.5 cm) of movement downwards towards contact between suction cups **312** and the top panel of the blank occurs at a much slower rate. The sensor also allows the PLC to know how much further vertically downwards end effector **120** must be lowered to establish proper contact between suction cups **312** and the top panel of the carton blank. It should also be noted that sensor rod **380** and its associated sensor device can also be used to ensure that PLC **132** is aware of whether, once a blank has been engaged, it remains engaged with the end effector **120** until it is intentionally released.

Turning to FIGS. **10** and **11**, shuttle **140** of system **100** has an L-shaped bed **400** with a horizontally extending base **402** and a vertically extending back wall **404**. The base has openings receiving suction cups **408** which are coupled to a solenoid controlled vacuum generator **332** (FIG. **3**). Similarly, back wall **404** has openings receiving suction cups **410** coupled to a solenoid controlled vacuum generator **334** (FIG. **3**). The shuttle rides on a horizontal rail **414** extending in the X-direction. Rail **414** is supported on the factory floor. The shuttle has a depending belt block **419** attached to an endless drive belt **416**. From the belt block, the drive belt extends along rail **414** to free-wheel **418** located at one end of rail **414**, around the free-wheel **418** and back along the rail **414** to the its other end where the belt passes around drive wheel **420** of a servo motor **422** and then returns along the rail **414** again to the belt block **419**. Given this arrangement, operating the servo motor in a counter-clockwise direction will move the shuttle in a downstream direction (toward the free-wheel **418**) and operating the servo motor in a clockwise direction will move the shuttle in an upstream direction (toward servo motor **422**).

FIGS. **12** and **13** detail folding apparatus **130**. Turning to these figures, the folding apparatus has opposed horizontally reciprocating fin ploughs, namely an upstream fin plough **500** and a downstream fin plough **510**. These fins are slidably supported on a horizontal rail **512** that extends in the X-direction. A servo motor **514** is attached to the upstream end of rail **512** and a free-wheel **516** is attached to the downstream end of the rail. A continuous drive belt **520** runs around the drive wheel **524** of servo motor **514** and the free-wheel **516**. Upstream fin **500** has a back plate **526** which is attached to the drive belt and downstream fin **510** has a front plate **528** attached to the drive belt. With this arrangement, if the servo motor **514** is operated in a counter-clockwise direction, fins **500**, **510** move toward each other and when servo motor is operated in a clockwise direction, fins **500**, **510** move away from each other. The folding apparatus also has opposed vertically reciprocating folding ploughs, namely an upper plough **530** and a lower plough **540**. Each folding plough has a planar base terminating in a curved ploughing face. The ploughs **530**, **540** are mounted to the ends of respective support arms **532**, **542** and the arms are mounted to carriages **534**, **544** slidably supported on a vertical rail **546** (i.e., a rail extending in the Z-direction). A servo motor **554** is attached to the upper end of vertical rail **546** and a free-wheel **556** is attached to the lower end of the rail. A continuous drive belt **560** runs around the drive wheel **564** of the servo motor **554** and the free-wheel **556**. A back of the upper carriage **534** is attached to belt **560** and a front of lower carriage **544** is attached to the belt. With this arrangement, if the servo motor **554** is operated in a counter-clockwise direction, folding ploughs **530**, **540** move toward each other and if the servo motor is operated in a clockwise direction, folding ploughs **530**, **540** move away from each other.

Referencing FIGS. **1** and **15** along with FIGS. **12** and **13**, the horizontal rail **512** on which fins **500**, **510** run is attached at either end to the base of L-shaped supports **560***a*, **560***b*. The L-shaped supports ride in channels **562** of vertical ribs **109***a*, **109***b* of frame **109**. A servo motor **568** is geared to a common drive shaft **570** to turn pinions (not shown) inside hubs **572***a*, **572***b*. The pinions mesh with ring gear portions of shafts **574***a*, **574***b* in order to turn, and thereby adjust, the vertical position of the shafts. The shafts are rotatably connected to the top of L-shaped supports **560***a*, **560***b*. The result is that operation of the servo motor **568** in one rotational direction raises the L-shaped supports **560***a*, **560***b*—and therefore fins **500**, **510**—and operation of the servo motor **568** in the opposite rotational direction lowers the L-shaped supports **560***a*, **560***b*.

Similarly, vertical rail **546** on which folding ploughs **530**, **540** run via support arms **532**, **542** and carriages **534**, **544** is attached to a linear support **580** that rides in a channel of vertical rib **109***c* of frame **109**. Common drive shaft **570** also turns a pinion (not shown) inside hub **572***c* and this pinion meshes with a ring gear portion of shaft **574***c* in order to turn, and thereby adjust, the vertical position of shaft **574***c*. The shaft is rotatably connected to the top of linear support **580**. The result is that operation of the servo motor **568** in one rotational direction raises the linear support **580**—and therefore folding ploughs **530**, **540**—and operation of the servo motor **568** in the opposite rotational direction lowers the linear support **580**. Moreover, since all of supports **560***a*, **560***b*, and **580** are adjusted by common drive shaft **570**, these supports are all adjusted to the same vertical extent by operation of servo motor **568**.

Referring to FIGS. **1**, **14**, and **15** the sealing station **135** has a tape sealer **640** and flap folding rods **632** which are supported by fin supporting rail **512** and so move vertically with fins **500**, **510**. The sealing station also has a pair of opposed conveyor belts, upper conveyor belt **600** driven by servo motor **602** and lower conveyor belt **610** driven by servo motor **612**, with the tape sealer **640** disposed between the conveyor belts **600**, **610**. The lower conveyor belt **610** and a supporting platform **614** are supported by the factory floor. The upper conveyor belt is mounted to a sub-frame **622**. Servo motor **568** has a second drive shaft **630** that is operatively associated with a drive train (not shown) so that operation of the servo motor **568** adjusts the vertical position of sub-frame **622** and, therefore, the upper conveyor belt **600** with respect to the lower conveyor belt **610**. Moreover, it will be noted that drive shaft **630** and common drive shaft **570** are driven by the same servo motor, motor **568**, such that a vertical adjustment of upper conveyor belt **600** is mirrored by a vertical adjustment of fins **500**, **510** and ploughs **530**, **540**. However, the drive train is configured with a 2:1 drive ratio so that the drive shaft **630** rotates twice for any rotation of common drive shaft **570**. The result is that a vertical adjustment of n cm of the fins, folding ploughs, tape sealer and flap supporting rods results in a vertical adjustment of **2***n* cm of the upper conveyor belt **610**. This ensures that the centreline of a carton sleeve remains at the level of the fins and tape sealer for any position of the upper conveyor belt **600**.

The sealing station terminates at carton re-orienting station **116**. The carton re-orienting station has a pair of

deflection plates **650**, **652** which re-orient a carton as it falls off the end of the sealing station to the discharge conveyor **117** from a position lying on its side at the sealing station **135** to an upright position on the discharge conveyor with its open top facing upwardly. The discharge conveyor **117** is a simple endless belt conveyor driven by a servo motor **658**.

A sensor **243** (FIG. **3**) such as an electronic eye model 42KL-P2LB-F4 made by ALLEN BRADLEY may be located at the input of the discharge conveyor. Sensor **243** may be positioned and operable to detect the presence or absence of an erected carton at the input to the discharge conveyor **117**. In this way, PLC **132** can be digitally signalled if an erected carton blank **111** remains at the input of the discharge conveyor such that another erected carton cannot be discharged. If so, the system **100** can be stopped by PLC **132** until any fault at discharge conveyor **117** can be rectified.

The overall operation of system **100** will now be described further in conjunction with FIG. **16**, which is a flow diagram of the sequence of operations of the PLC.

To prepare system **100** for operation, one or more stacks of knock-down carton blanks **111** may be placed at the input end of conveyor **204**. In this regard, it is assumed the blanks are placed on the conveyor **204** with panels A and B, and flaps E, F, I, and J facing up, as shown in FIG. **4**A, and the common edge of end flaps F and J facing side wall **200** as shown by the blank **111** in FIG. **1**. System **100** may then be activated, such as by PLC **132** being instructed through HMI **133** to commence the processing of blanks **111**. As an initial step PLC **132** may initialize the system by ensuring that all components are put in their "start" positions (step **700**). PLC **132** may then send an instruction to the drive motor of input conveyor **204** causing stack(s) of blanks **111** to be conveyed downstream in the X-direction (step **702**) toward an identification reader. An identifier on the first stack may then be read by the identification reader **205** which identifies the dimensions of the blanks in the first stack. With this information and in order to adapt system **100** to process blanks of the size in the first stack, the PLC adjusts the stroke of both the outer side wall **201** and the shuttle **140**, the path of end effector **120**, the vertical position of the folding fins **500**, **510**, the folding ploughs **530**, **540**, the tape sealer **640** and flap folding rods **632**, and upper conveyor **600** (step **704**).

Sometime prior to a stack of blanks reaching alignment conveyor **206**, the outer side guide wall **201** under control of PLC **132** will be driven by servo motor **260** to expand wide enough to allow the stack of blanks to enter alignment conveyor **206**, even if the stack is misaligned and/or the blanks in the stack are not perfectly square with each other. The stack(s) of blanks moves downstream, until the front edge of the (first) stack of blanks passes the downstream edge of conveyor **204** at which time sensor **242** sends a signal to PLC **132** indicating that the front edge of the stack has reached the input to alignment conveyor **206**. In response, PLC **132** may stop input conveyor **204** and send an instruction to the drive motor of alignment conveyor **206** to cause the stack of blanks **111** to move downstream towards end picket wall **218** of magazine **110**. Once the front edge of the stack of blanks **111** reaches end wall **218**, sensor **240** will send a signal to PLC **132** indicating that the front edge of the stack of blanks has reached end wall **218**. In response, PLC **132** can then move the outer side wall **201** inwardly to straighten the stack laterally and initiate the tamping sequence to "square up" the stack of blanks longitudinally, as detailed above (step **706**).

In review, the sequence for ensuring the blanks are properly squared up at the pick-up location may include the following steps. The side guide wall **201** moves inwardly to make contact with the side of the stack of blanks and press the stack against the left hand side guide wall **200**. This aligns the blanks so the lateral edges of the blanks are aligned with each other. This also moves the tamping plate **280** in behind the stack. The tamping plate **280** may then move forwardly to press the stack forward against the picket wall **218**, thereby aligning the blanks in the stack longitudinally so that their front and rear edges are vertically aligned with each other. The stack of blanks **111** is then properly positioned at the pick-up location so that the end effector **120** can begin picking up blanks from the stack.

End effector **120** will be positioned by the control of PLC **132** over movement apparatus **115**, at the zero position calibrated for the end effector **120**. PLC **132** may then cause servo motors **150** and **154** to be operated to achieve the following sequence of operations.

First the end effector **120** may be moved to the pick-up location as shown in FIG. **1** such that the end effector is directly over panel B of the top blank in the stack of blanks at the pick-up location.

As the end effector **120** is brought vertically downwards to retrieve the top blank on the stack of blanks **111** in magazine **110**, the end effector's movement just prior to suction cups **312** contacting with the upper surface of the blank will be generally vertically downwards. Prior to the suction cups **312** contacting the surface of a panel B of a blank, sensor rod **380** will contact the surface of panel B and be pushed upwardly. This upward movement of sensor rod **380** relative to plate **327** will cause a sensor to be activated and send a signal to PLC **132**. PLC **132** responds to that signal by causing servo drives **150** and **154** to slow down so that the final few centimeters (e.g. 3.5 cm) of movement downwards towards contact between cups **312** and the upper surface of panel B occurs at a much slower rate. Also, PLC knows how much further vertically downwards the end effector **120** must be lowered to establish proper contact between suction cups **312** and panel B. PLC **132** will then operate the valve device **330** on end effector **120** to cause suction force to be developed at suction cups **312**. Sensor rod **380** and its associated sensor device can also be used to ensure that PLC **132** is aware of whether, once a blank has been engaged in the magazine **110**, it remains engaged with end effector **120** until it is intentionally released.

With the end effector **120** in the pick-up location and the suction force being applied at suction cups **312**, the end effector **120** engages panel B of the top blank and then lifts the blank lift upwards (step **708**).

When the end effector **120** has reached a determined height it is moved laterally in the Y-direction until it is positioned over shuttle **140**.

Next, with reference to FIG. **17**, the end effector descends until the blank sits on the bed **400** of the shuttle with the hinge line R between side panel A and side panel D (FIG. **4**B) positioned against the vertically extending back wall **404** of the shuttle **140**. The PLC then activates the suction cups **408** at the base **402** of the shuttle bed to grip the underside of the blank, and specifically side panel D of the blank (step **710**). Notably, side panel D, being the panel directly underneath side panel A in the knock-down blank, is not directly hinged to panel B, which panel is gripped by the end effector.

The end effector **120** is then raised vertically in the Z-direction while, simultaneously, the shuttle **140** is moved forwardly in the X-direction. In consequence of these operations, provided the simultaneous motions of the end effector and shuttle are appropriately co-ordinated, since underside

panel D of the blank is gripped at the base of the shuttle and top panel B of the blank is gripped by the end effector, the blank begins to open up as illustrated in FIG. **18**.

The end effector **120** continues to move vertically upwardly and the shuttle simultaneously continues to move forwardly until the blank is fully erected into a carton sleeve as illustrated in FIG. **19**. The PLC will recognize this end point due to its knowledge of the dimensions of the sleeve. With the blank formed into a carton sleeve, panel A of the sleeve (seen in FIG. **18**) abuts the back wall **404** of the shuttle **140** (step **712**).

With panel A abutting the back wall **404** of the shuttle, the suction cups **410** of the back wall are activated so that panel A is gripped by the back wall **404** of the shuttle (step **714**). With both panels A and D held by the shuttle, the carton sleeve is held in its erect position without need of support from end effector **120**. Therefore, at this stage, the suctions cups **312** of the end effector **120** are de-activated and the end effector is moved away from the shuttle **140** back to the pick-up location (step **716**).

Next, with shuttle **140** held stationary, fin ploughs **500**, **510** are moved toward one another until they are adjacent one another as shown in FIG. **20** (step **718**). This has the effect of folding minor bottom end panels F and G of the carton sleeve inwardly, as shown in FIG. **21**. In this regard, it will be recalled that the vertical position of the fin ploughs **500**, **510** was set based on the size of the blank. This setting is so as to result in the fin ploughs contacting panels F and G at their midpoint.

With the shuttle remaining stationary and the fin ploughs remaining adjacent one another, the upper and lower ploughs **530**, **540** are next moved toward one another until these ploughs are positioned at a small stand off from fin ploughs **500**, **510** as shown in FIG. **22** (step **720**). This has the effect of folding major bottom flaps J and K of the carton sleeve inwardly, as shown in FIG. **23**.

Leaving all of the ploughs in place, the PLC next activates conveyor belts **600**, **610** and moves the shuttle **140** downstream until the belts frictionally grip side panels B and D of the carton sleeve and pull it downstream, extracting it from the ploughs (step **722**).

As the sleeve is pulled downstream from the ploughs **500**, **510**, **530**, **540**, the outside surface of major bottom flaps J and K are brought into contact with folding rods **632** which progressively complete the fold of flaps J and K. The carton sleeve is then pulled past taping sealer **640** by conveyor belts **600**, **610** at which sealer the seam between flaps J and K is taped in order to tape closed the bottom of the carton sleeve to form a carton. The carton is then ejected to the re-orienting station where it is deflected by deflector plates **650**, **652** as it falls onto the discharge conveyor **117** so that the bottom of the carton (i.e., flaps J and K) rest on the discharge conveyor. The discharge conveyor then conveys the carton to the output of system **100**.

Once the carton sleeve has moved downstream from the ploughs **500**, **510**, **530**, **540**, these ploughs are retracted from one another and the shuttle **140** is returned to its initial position in order to prepare system **100** for processing the next carton blank (step **724**); the end effector can then pick up the next blank in the stack (step **726**).

After exhausting the current stack of blanks, the next stack is conveyed to the information reader **205** and the PLC will read the dimensions of blanks in the next stack (step **726**). Thereafter, once the last blank in the current stack has moved downstream of the conveyor belts **600**, **610**, if the blanks in the next stack have different dimensions from the dimensions of blanks in the now exhausted stack, the PLC adjusts the stroke of the outer side wall **201** and the shuttle **140**, the path of end effector **120**, and the vertical position of the folding fins **500**, **510**, the folding ploughs **530**, **540**, tape sealer **640** with folding rods **632**, and upper conveyor **600**. System **100** is then readied to handle the next stack and it is moved to the pick-up location and the described processing operations repeated.

The system provides a relatively high processing capacity in part due to the relatively short "stroke" (i.e. longitudinal distance) that the end effector and shuttle must travel when carrying out the blank retrieval and erection. This means that the components do not have to travel such a great distance as in conventional carton erectors.

The system also has a relatively small footprint due to the U-shaped path provided for cartons blanks erected into cartons by the system. More specifically, incoming blanks are conveyed in an upstream X-direction to the pick-up location. These blanks are then conveyed in a Y (and Z) direction to the shuttle where they are then conveyed downstream in the X-direction.

Many variations of the embodiments described above are possible. By way of example the system may employ a second movement apparatus and end effector, identical in construction to movement apparatus **115** and end effector **120**, but a mirror image thereof. With such an arrangement, the two devices may be mounted side-by-side with the two end effectors operating in the same plane. Collisions between the two end effectors can be avoided by operating the two movement apparatus such that the two end effectors are always 180° out of phase with one another.

In another embodiment, as an alternate to magazine **110** in carton forming system **100** as described above, a modified carton forming system **1100** may have a plurality of magazines. FIGS. **24** and **25** illustrate the input end of such a modified system **1100** with a plurality of magazines M**1**-M**16** that feed to a common in-feed conveyor **1204**. The in-feed conveyor **1204** feeds to alignment conveyor **206**, and the remainder of the modified system, being identical to system **100**, is not illustrated.

Magazines M**1**-M**16** may each contain one or more stacks of product packaging, such as case blanks which each may generally be like blanks **111** processed by system **100**, with at least some of the magazines M**1**-M**16** containing different types/sizes and/or configurations of packaging/case blanks to other magazines. The size, configurations and types of case blanks (and the cases that can be formed therefrom) can vary to provide a range of case sizes, configurations and types that can be automatically processed by the system **1100** without the need for any manual intervention to modify any components of the system. PLC **132** of system **1100** may be programmed such that the particular dimensions/overall size/configuration (e.g. such as regular slotted carton or "RSC")/type of each of the blanks held in each one of the magazines M**1**-M**16** is stored in the memory of the PLC **132**.

Each magazine M**1**-M**16** may have its own blank transfer apparatus that may each include a transversely oriented magazine conveyor **1203**(**1**) to **1203**(**16**) respectively. Each conveyor **1203**(**1**) to **1203**(**16**) (referred to generically as a magazine conveyor **1203**) may be controlled by PLC **132**, such that a stack of blanks in each magazine M**1**-M**16** may be moved to a position adjacent a longitudinally oriented, central case blank in-feed conveyor **1204**. Each magazine M**1**-M**16** may have a transfer apparatus under the control of PLC **132** that is operable to extract and move a blank from a stack in the magazine M**1**-M**16** adjacent to in-feed conveyor **1204** and feed it onto central in-feed conveyor **1204** so that it may be transported.

With reference now to FIG. **26**, by way of representative example of the construction of a magazine, magazine conveyor **1203**(**1**) may include a frame **1215** that supports five, generally parallel, and spaced continuous belts **1213** that may be made of any suitable flexible material such as Ropanyl. The belts **1213** may each extend between rotatable idler wheels **1221** mounted on a freely rotatable shaft and rotatable drive wheels **1223**. Drive wheels **1223** may be mounted for rotation with and to a common drive shaft **1225** of a servo motor **1219** that may be interconnected via and in communication with a servo drive to the PLC **132** of system **1100**. Conveyor belts **1213** may each have an upper belt portion that together may support one or more stacks of blanks **1211** thereon. PLC **132** may give an instruction (such as by order fulfilment processor **1300**) to form a case, and if required, PLC **132** may cause upper belt portion of belt **214** to move towards in-feed conveyor **1204** by operation of servo motor **1219** rotating drive wheels **1223**. In this way belt **214** can, if necessary, move a stack of blanks **1211** to a position adjacent to the in-feed conveyor **1204**.

Positioned proximate the end of each magazine conveyor **1203** adjacent in-feed conveyor **1204** may be a vertically and longitudinally oriented plate **1230** (not shown in FIGS. **24** and **25**). Each plate **1230** may be supported by a plurality of plate support members **1235** that may be part of frame **1215**. A lower longitudinally extending edge **1233** of plate **1230** may be positioned so that only the bottom blank in a stack of blanks (i.e. the blank that is immediately above the upper portions of the belts) can pass through a slot provided beneath lower edge **1233** of plate **1230** and the horizontal plane formed by the upper surface of the upper portions of the belts **1213**. In this way, a slot **1231** can be provided that can permit a single blank at a time from the bottom of the stack to be pushed transversely through the slot and onto the in-feed conveyor **1204**.

A pushing mechanism may be provided to respond to signals from PLC **132** of the case former to push a blank in a magazine from the bottom of the stack though the slot **1204** and onto in-feed conveyor **1204**. The pushing mechanism may be any suitable type of device and may for example include a plurality of lugs **1217** located in the spaces between belts **1213**. The lugs may be driven in a cyclical path by a common type crank mechanism (not shown) that may include a common pneumatic or hydraulic cylinder with a piston controlled by PLC **132** by activating appropriate valves to suitably control the flow of pressurized air/hydraulic fluid to the cylinder. The cylinder may have a piston arm attached to a longitudinally oriented bar member that may be mounted for rotation. The crank mechanism may be configured to provide a path for the lugs **1217** that commences in a position behind the bottom blank in a stack, then moves transversely between the belts **1213** while engaging the rear side edge of the bottom blank thereby pushing the bottom blank through the slot **1231**. Once the crank mechanism reaches the end of the stroke, the lugs **1271** will descend downwards beneath the stack of blanks and move transversely in an opposite direction back to the starting position, while at the same time not engaging the next bottom blank on the stack and passing beneath the stack. The path returns the lugs **1217** back to the start position so that when signalled by PLC **132** to load another blank onto conveyor **1204**, the operation can be repeated.

In summary, PLC **132** can thus control motor **1219** and thus the movement of each conveyor **1203** as well as the movement of the lugs **1281**, and thus is able to selectively move and transfer a single blank at a time onto in-feed conveyor **1204** from any one of magazines M1 to M16.

Therefore, unlike in system **100** where a stack of case blanks may be fed to the alignment conveyor **206** by in-feed conveyor **204**, in the modified system separate individual case blanks may be fed in series and longitudinally by in-feed conveyor **1204** to alignment conveyor **206**. The particular sequence/order of carton blanks that are placed onto in-feed conveyor **1204** of system **1100** may be determined and selected by PLC **132** such that case blanks may arrive at alignment conveyor **1206** in such a desired manner in which it is desired to process the blanks at least within system **1100**.

Further, PLC **132** may maintain in its memory records of case blanks that have been placed onto in-feed conveyor **1204**. For example, this information may include the type/size/configuration of the case blank and, where the system **1100** includes a labeller, the label information to be applied to the carton blank. A new record can be added each time a request for a new carton is received and, optionally, records can be removed once a carton has been formed (and labelled). Thus, such records may be organized and maintained in sequence in the memory of PLC **132** using a conventional shift registering technique. In this way, the record for the next carton blank scheduled to arrive at alignment conveyor **206** may be provided at the output of the shift registers as that carton blank arrives, and the type/configuration/size of that carton blank and the label information for that case blank may be determined from the provided output.

Once transferred from in-feed conveyor **1204** to alignment conveyor **206**, the alignment conveyor **206** may then under the control of PLC **132** move each blank sequentially to the pick-up location in the manner described previously with respect to system **100**. In this regard, conveyor **1204** may be constructed substantially like conveyor **204**.

A sensor (not shown) such as an electronic eye model 42KL-D1LB-F4 made by ALLEN BRADLEY, may be located within the horizontal gap between in-feed conveyor **1204** and alignment conveyor **206**. The sensor may be positioned and operable to detect the presence of the front edge of a blank as each blank in turn begins to move over the gap between the conveyors. Upon detecting the front edge, sensor may send a digital signal to PLC **132** signalling that a particular blank (the size/configuration/type of which PLC **132** is aware) has moved to a position where conveyor **206** can start to move. PLC **132** can then cause the motor for conveyor **206** to be activated to move the blank downstream. In this way, there can be a "hand-off" of each blank from in-feed conveyor **1204** to alignment conveyor **206**.

Once the rear edge of each blank passes the sensor, a signal may be sent to PLC **132** which can then respond by sending a signal to shut down the motor driving conveyor **1204**. Conveyor **1204** is then in a condition to await a further signal thereafter to feed the next blank in the series of blanks on the conveyor **1204** to alignment conveyor **206**. Meanwhile system **1100** can be operated to move the blank on alignment conveyor **206** to the pick-up location in the manner described in conjunction with system **100** so that processing of the blank can continue as described in conjunction with system **100**.

Optionally, PLC **132** may verify that the type/size/configuration of the case blank at the pick-up location matches the expected case blank. For example, the top surface of each case blank may include a bar code identifying its type/size/configuration, and this bar code may be read at the pick-up location by a suitably positioned bar code reader. The type/size/configuration of the case blank read from this bar code may be compared to the expected type/size/con-

figuration of case blank, which may be determined from a record of the next scheduled case blank stored in memory of the PLC, as described above. Verification is successful when there is a match. When there is not a match, PLC **132** may issue a signal requesting manual operator intervention.

The system has been described as having a PLC. Optionally, any other suitable controller may be substituted, such as a programmed general purpose computer.

The carton blank, and resulting sleeve, has been described as being gripped with suction cups. Of course, any other suitable grippers may be employed.

Of course, the above described embodiments are intended to be illustrative only and in no way limiting. The described embodiments of carrying out the invention are susceptible to many modifications of form, arrangement of parts, details and order of operation. The invention, rather, is intended to encompass all such modification within its scope, as defined by the claims.

When introducing elements of the present invention or the embodiments thereof, the articles "a," "an," "the," and "said" are intended to mean that there are one or more of the elements. The terms "comprising," "including," and "having" are intended to be inclusive and mean that there may be additional elements other than the listed elements.

What is claimed is:

1. A method of erecting a carton, comprising:

(a) placing a knock-down carton blank on a base of a bed of a shuttle such that a bottom side panel of said knock-down carton blank abuts said base;

(b) gripping said bottom side panel of said blank with a gripper of said base;

(c) raising a top side panel of said knock-down carton blank while advancing said shuttle in a horizontal direction so as to open said knock-down carton blank into a carton sleeve;

wherein a side panel is hingedly connected to said top side panel and to said bottom side panel of said carton blank;

wherein said raising opens said knock-down blank so that said side panel is brought into abutment with a generally vertically extending back wall of said shuttle;

and wherein said method further comprises:

(d) after said raising, gripping said side panel of said knock-down carton blank with a gripper of said back wall;

(e) with said gripper of said back wall gripping said side panel of said knock-down carton blank, releasing said top side panel of said knock-down carton blank.

2. The method of claim **1**, wherein said raising comprises raising said top side panel in a vertical direction while advancing said shuttle in said horizontal direction.

3. The method of claim **2**, wherein said bed is L-shaped with said base horizontally extending and said vertically extending back wall extending generally orthogonally to said base.

4. The method of claim **1**, wherein said placing places a hinge line between said bottom side panel and said further side panel of said carton blank against said vertically extending back wall of said shuttle bed.

5. The method of claim **1**, wherein said gripper of said base comprises at least one vacuum cup and wherein said gripping said bottom side panel of said blank comprises activating said at least one vacuum cup.

6. The method of claim **1** further comprising selecting said knock-down carton blank from amongst a plurality of blanks having differing dimensions based on dimensions of said knock-down carton blank, conveying said knock-down carton blank to a pick-up location, and picking up and transferring said knock-down carton blank toward said base.

7. Apparatus for use in erecting a carton, comprising:

a shuttle having a bed with a horizontally extending base having a base grippers;

a shuttle drive apparatus for driving said shuttle in a horizontal advancement direction;

an end effector having an end effector grippers;

an end effector movement device for moving said end effector;

a controller operatively associated with said shuttle drive apparatus, said end effector movement device and said base grippers and said end effector gripper, and configured to:

operate said movement device and end effector to grip a top side panel of a knock-down carton blank and place said knock-down carton blank on said horizontally extending base of said shuttle such that a bottom side panel of said knock-down carton blank abuts said horizontally extending base;

activate said base grippers to grip said bottom side panel of said blank;

operate said movement device to raise said top side panel of said knock-down carton blank with said end effector while horizontally advancing said shuttle in order to open said knock-down carton blank into a carton sleeve;

wherein a side panel is hingedly connected to said top side panel and to said bottom side panel of said carton blank;

wherein said controller is operable to operate said movement device to raise and open said knock-down blank so that said side panel is brought into abutment with a generally vertically extending back wall of said shuttle, and said controller is further operable such that a gripper of said back wall grips said side wall of said knock-down carton blank;

wherein said controller is further operable such that with the gripper of said back wall gripping said side panel of said knock-down carton blank, the gripper of the end effector releases said top side panel of said knock-down carton blank.

8. The apparatus of claim **7**, wherein said bed has said back wall having said back wall grippers, said controller is operatively associated with said back wall grippers, and said controller is further configured to operate said back wall grippers to grip a further side panel of said carton sleeve.

9. The apparatus of claim **7**, further comprising a pair of horizontally reciprocating ploughs disposed beside said bed and wherein said controller is further configured to, after releasing said top side panel of said knock-down carton blank, advancing said pair of horizontally reciprocating ploughs toward one another to fold minor end flaps of said carton sleeve inwardly toward one another.

10. The apparatus of claim **7** wherein said movement device is operable to:

grip said top side panel of said knock-down carton blank at a pick-up location with an end effector of a movement apparatus;

translate said knock-down carton blank with said movement device from said pick-up location to a position over said shuttle; and

vertically lower said knock-down carton blank with said movement apparatus onto said base of said shuttle bed.

11. The apparatus of claim **10**, wherein said horizontal direction of advancement of said shuttle is a first horizontal

direction and wherein said movement device has two degrees of freedom, a first degree of freedom providing movement of said end effector in a vertical direction and a second degree of freedom providing movement of said end effector in a second horizontal direction transverse to said first horizontal direction.

12. The apparatus of claim **11** further comprising a conveyor operable to convey said knock-down carton blank to said pick-up location in a third horizontal direction that is generally parallel to said first horizontal direction.

13. The apparatus of claim **12** wherein said conveyor is operable to convey said knock-down carton blank to said pick-up location in a third horizontal direction that is opposite to said first horizontal direction.

14. The apparatus of claim **12** wherein said conveyor is operable to convey said knock-down carton blank into abutment with a side wall extending along said third horizontal direction and a front stop at said pick-up location extending transversely of said third horizontal direction in order to precisely locate said knock-down carton blank at said pick-up location.

15. The apparatus of claim **7**, wherein said bed is L-shaped with said base horizontally extending and said vertically extending back wall extending generally orthogonally to said base.

16. A method of erecting a container, comprising:

(a) placing a knock-down container blank on a base such that a bottom side panel of said blank abuts said base;

(b) gripping said bottom side panel of said container blank with a gripper of said base;

(c) raising a top side panel of said container blank while providing relative movement of said top side panel relative to said bottom side panel in a horizontal direction so as to open said blank into a container sleeve;

wherein a side panel is pivotally connected to said top side panel and to said bottom side panel of said container blank;

wherein said raising opens said container blank so that said side panel is brought into abutment with a generally vertically extending back member;

and wherein said method further comprises:

(d) after said raising, gripping said side panel of said knock-down carton blank with a gripper of said back member;

(e) while gripping said side panel of said knock-down carton blank with said gripper of said back member, releasing said top side panel of said knock-down carton blank.

17. An apparatus for use in erecting a carton, comprising:

a shuttle having a bed with a horizontally extending base having a base gripper;

a shuttle drive apparatus for driving said shuttle in a horizontal advancement direction;

an end effector having an end effector gripper;

an end effector movement device for moving said end effector;

a controller operatively associated with said shuttle drive apparatus, said end effector movement device and said base gripper and said end effector gripper, and configured to:

operate said movement device and end effector to grip a top side panel of a knock-down carton blank and place said knock-down carton blank on said horizontally extending base of said shuttle such that a bottom side panel of said knock-down carton blank abuts said horizontally extending base;

activate said base grippers to grip said bottom side panel of said blank;

operate said movement device to raise said top side panel of said knock-down carton blank with said end effector while providing relative horizontal movement between said movement device and said shuttle in order to open said knock-down carton blank into a carton sleeve;

wherein a side panel is pivotally connected to said top side panel and to said bottom side panel of said carton blank;

wherein said controller is operable to operate said movement device to raise and open said knock-down blank so that said side panel is brought into abutment with a generally vertically extending back portion of said shuttle, and said controller is further operable such that after said raising, a gripper of said back portion grips said side wall of said knock-down carton blank;

wherein said controller is further operable such that while the gripper of said back portion grips said side panel of said knock-down carton blank, the gripper of the end effector releases said top side panel of said knock-down carton blank.

18. A method for use in erecting a carton, comprising:

(a) placing a knock-down carton blank on a base of a bed of a shuttle such that a bottom side panel of said knock-down carton blank abuts said base;

(b) gripping said bottom side panel of said blank with a gripper of said base;

(c) raising a top side panel of said knock-down carton blank with an end effector of a movement apparatus while advancing said shuttle in a horizontal direction so as to open said knock-down carton blank into a carton sleeve;

wherein said horizontal direction of advancement of said shuttle is a first horizontal direction and wherein said movement apparatus has two degrees of freedom, a first degree of freedom providing movement of said end effector in a vertical direction and a second degree of freedom providing movement of said end effector in a second horizontal direction transverse to said first horizontal direction.

19. The method of claim **18**, further comprising conveying said knock-down carton blank to a pick-up location in a third horizontal direction opposite to said first horizontal direction.

20. The method of claim **19**, wherein said conveying said knock-down carton blank further comprises conveying said knock-down carton blank into abutment with a side wall extending along said third horizontal direction and a front stop at said pick-up location extending transversely of said third horizontal direction in order to precisely locate said knock-down carton blank at said pick-up location.

21. An apparatus for use in erecting a carton, comprising:

a conveyor for conveying a knockdown carton to a pick-up location;

a shuttle having a bed with a horizontally extending base having a base gripper;

a shuttle drive apparatus for driving said shuttle in a horizontal advancement direction;

an end effector having an end effector gripper;

an end effector movement device for moving said end effector;

a controller operatively associated with said shuttle drive apparatus, said end effector movement device and said base gripper and said end effector gripper, and configured to:

operate said movement device and end effector to grip a top side panel of a knock-down carton blank and place said knock-down carton blank on said horizontally extending base of said shuttle such that a bottom side panel of said knock-down carton blank abuts said horizontally extending base;

activate said base gripper to grip said bottom side panel of said blank;

operate said movement device to raise said top side panel of said knock-down carton blank with said end effector while horizontally advancing said shuttle in order to open said knock-down carton blank into a carton sleeve;

wherein said horizontal direction of advancement of said shuttle is a first horizontal direction and wherein said end effector movement device has two degrees of freedom, a first degree of freedom providing movement of said end effector in a vertical direction and a second degree of freedom providing movement of said end effector in a second horizontal direction transverse to said first horizontal direction.

22. The apparatus of claim **21**, wherein said conveyor is operable to convey said knock-down carton blank to said pick-up location in a third horizontal direction opposite to said first horizontal direction.

23. The apparatus of claim **22**, wherein said apparatus is operable to convey said knock-down carton blank into abutment with a side wall extending along said third horizontal direction and a front stop at said pick-up location extending transversely of said third horizontal direction in order to precisely locate said knock-down carton blank at said pick-up location.

* * * * *